

Systems, Spotlights, Tracks, Recessed lights,
Outdoor lamps, Light bulbs.

Selection for designers and architects.

Light shapes function.

ideal lux. technical outdoor


An old know-how accompanies people who work with light: the ability of designing with precision, of mastering the rules of this craft, the sensibility of those who are able to transform technique into vision.

This catalogue is born from that same attitude, from the experience of the people who knows the light, interprets it and turn it into a design tool.

This is a practice and functional guide, thought to support the work of professionals like you, by offering reliable, current and high quality technical and outdoor solutions.

It is our way of being at your side: with expertise, care and a constant commitment to the evolution of light as a language and inspiration.

Raffaele Strano, CEO

A handwritten signature in black ink, appearing to read 'Raffaele Strano', written in a fluid, cursive style.

















































IDEAL LUX

DEVA P. 54 ↗

















IDEAL LUX

TAURUS P. 556 ↗













Alphabetical index technical outdoor

> Agos	476	> Etere	392, 512	+ Link	224
> Andromeda	430	> Febe	450	> Litio	378, 544
> Argo	422	> Felix	434	> Lolita	462
> Atena	508	> Fiesta	368	+ Look	214
> Atom	414	> Floor	554	> Luna	352, 472
+ Basic	288	+ Fluo	146	> Mib	366
+ Beyond	302	+ Fox	194	+ Nova	306
> Bit	548	+ Game	256	> O-Zone	370, 524
> Boeing	502	> Gas	382, 490	+ Off	282
> Bubble	364, 442	> Giove	432	+ Office	172
> Clio	356, 447, 518	+ Groove	294	> Omega	372
> Cosmo	516	> Gun	360, 398	> Park	560
> Cute	458	> Hub	492	+ Play	210, 300
> Dedra	452	> Iko	410	> Polar	440
+ Deep	286	+ Infinity	278	> Post-It	418
+ Deva	54	> Inside	546	> Punto	400
+ Display	216	+ Jazz	342	> Pure	454
> Doris	466	> Jedi	498	+ Quark	272
> Down	448	> Keope	396	> Rex	436
+ Dynamite	212	> Koala	530	> Rocket	568
> Edo	510	> Kurt	486	+ Room-65	346
+ Ego	92	+ Led Panel	312	+ Samba	336
> Elio	376, 542	+ Lika	318	> Sasso	474
+ Eos	204	> Linea	406	> Sirio	412, 482, 538

+ Slot	186	> Twiggy	464
> Snif	394	> Twin	428
> Snow	354, 444	> Ulex	534
> Sole	350, 468	> Up	420
> Starlight	526	> Urano	362
+ Steel	156	> Vega	496
+ Stick	74	+ Walky	340
+ Strip Led	174	> Way	564
> Style	388, 480	> Wire	550
+ Swing	344	> Xeno	384
> Swipe	386	+ Zephyr	332
+ Tag	268	+ Zeus	242
> Taurus	556		
> Techo	358		
> Terra	380, 540		
+ Tesi	180	<u>Bulbs</u>	
> Tesla	488	E14	576
> Tetris	424	E27	578
> Thor	520, 552	G4	584
> Tifone	494	G9	585
> Titano	484	GX53	586
> Toffee	404, 456	R7s	587
> Torre	514	GU10	588
> Tronco	390, 506	Kit emergency	590

technical +
outdoor >

Typology index

technical

LINEAR SYSTEMS



deva
54



stick
74



ego
92



fluo
146



steel
156



office
172



strip led
174



tesi
180



slot
186

SPOTLIGHTS AND TRACKS



fox
194



eos
204



play
210



dynamite
212



look
214



display
216



link
224

RECESSED LIGHTS



zeus
242



game
256



tag
268



quark
272



infinity
278



off
282



deep
286



basic
288



groove
294



play
300



beyond
302



nova
306



led panel
312



lika
318



zephyr
332



samba
336



walky
340



jazz
342



swing
344



room-65
346



Typology index

outdoor

SUSPENSIONS AND CEILING

	Sole 350		Luna 352		Snow 354		Clio 356		Techo 358
	Gun 360		Urano 362		Bubble 364		Mib 366		Fiesta 368

WALL LAMPS

	O-Zone 370		Omega 372		Elio 376		Litio 378		Terra 380
	Gas 382		Xeno 384		Swipe 386		Style 388		Tronco 390
	Etere 392		Snif 394		Keope 396		Gun 398		Punto 400
	Toffee 404		Linea 406		Iko 410		Sirio 412		Atom 414
	Post-It 418		Up 420		Argo 422		Tetris 424		Twin 428
	Andromeda 430		Giove 432		Felix 434		Rex 436		Polar 440
	Bubble 442		Snow 444		Clio 447		Down 448		Febe 450
	Dedra 452								

BOLLARD AND TABLE LAMPS

	Pure 454		Toffee 456		Cute 458		Lolita 462		Twiggy 464
	Doris 466		Sole 468		Luna 472		Sasso 474		Agos 476
	Style 480		Sirio 482		Titano 484		Kurt 486		Tesla 488
	Gas 490		Hub 492		Tifone 494		Vega 496		Jedi 498
	Boeing 502		Tronco 506		Atena 508		Edo 510		Etere 512
	Torre 514		Cosmo 516		Clio 518				

SPOTLIGHTS

	Thor 520		O-zone 524		Starlight 526		Koala 530		Ulex 534
	Sirio 538		Terra 540		Elio 542		Litio 544		Inside 546

DOWNLIGHTS

	Bit 548		Wire 550		Thor 552		Floor 554		Taurus 556
	Park 560		Way 564		Rocket 568				



deva	54	tag	268
stick	74	quark	272
ego	92	infinity	278
fluo	146	off	282
steel	156	deep	286
office	172	basic	288
strip led	174	groove	294
tesi	180	beyond	302
slot	186	nova	306
fox	194	led panel	312
eos	204	lika	318
play	210, 300	zephyr	332
dynamite	212	samba	336
look	214	walky	340
display	216	jazz	342
link	224	swing	344
zeus	242	room-65	346
game	256		



TECHNICAL







DEVA



Linear system consisting of an extruded aluminium profile and magnetically fixed lighting elements.

 IP20		MacAdam: SDCM 3 LED COB OSRAM 30.000 h life			 light beam: ACCENT		Material: Aluminum			
 					Power	Installation	Beam	CRI		
					2,5W	TRACK	37°	≥90		
					Control	Lumen	CCT	Finish	Code	€
					On-Off	150 lm	3000 K	● Black	332765	40
					On-Off	160 lm	4000 K	● Black	370170	40
 					Driver					
					No					
 90°	 355°	 0,030 Kg/0,0002 m³								

 IP20		MacAdam: SDCM 3 LED COB BRIDGELUX 30.000 h life		 light beam: ACCENT		Material: Aluminum									
 				Power		Installation		Beam		CRI					
				4,5W		TRACK		34°		≥90					
				Control		Lumen		CCT		Finish		Code		€	
				On-Off		450 lm		3000 K		● Black		332789		46	
				On-Off		470 lm		4000 K		● Black		370224		46	
				Photometry								Driver			
												No			
 90°		 355°		 0,050 Kg/0,0003 m³											

		Power	Installation	Beam	CRI		
		8W	TRACK	30°	≥90		
		Control	Lumen	CCT	Finish	Code	€
		On-Off	750 lm	3000 K	● Black	332819	52
		On-Off	780 lm	4000 K	● Black	370149	52
		Photometry					Driver
							No
90°	355°	0,090 Kg/0,0004 m³					

deva spot




The system is available in matt black painted finish, in surface-mounted or suspended installation mode (SURFACE), quick recessed installation in plasterboard (TRIMLESS) or trimless recessed installation between two plasterboard panels (RECESSED).

Ideal for lighting small spaces where minimal system footprint, wide application flexibility and high lighting quality are required, such as RESIDENTIAL, MUSEUM and RETAIL spaces.



1:1 Scale representation.
The diameter of Deva Spot 2.5 W is 25mm.


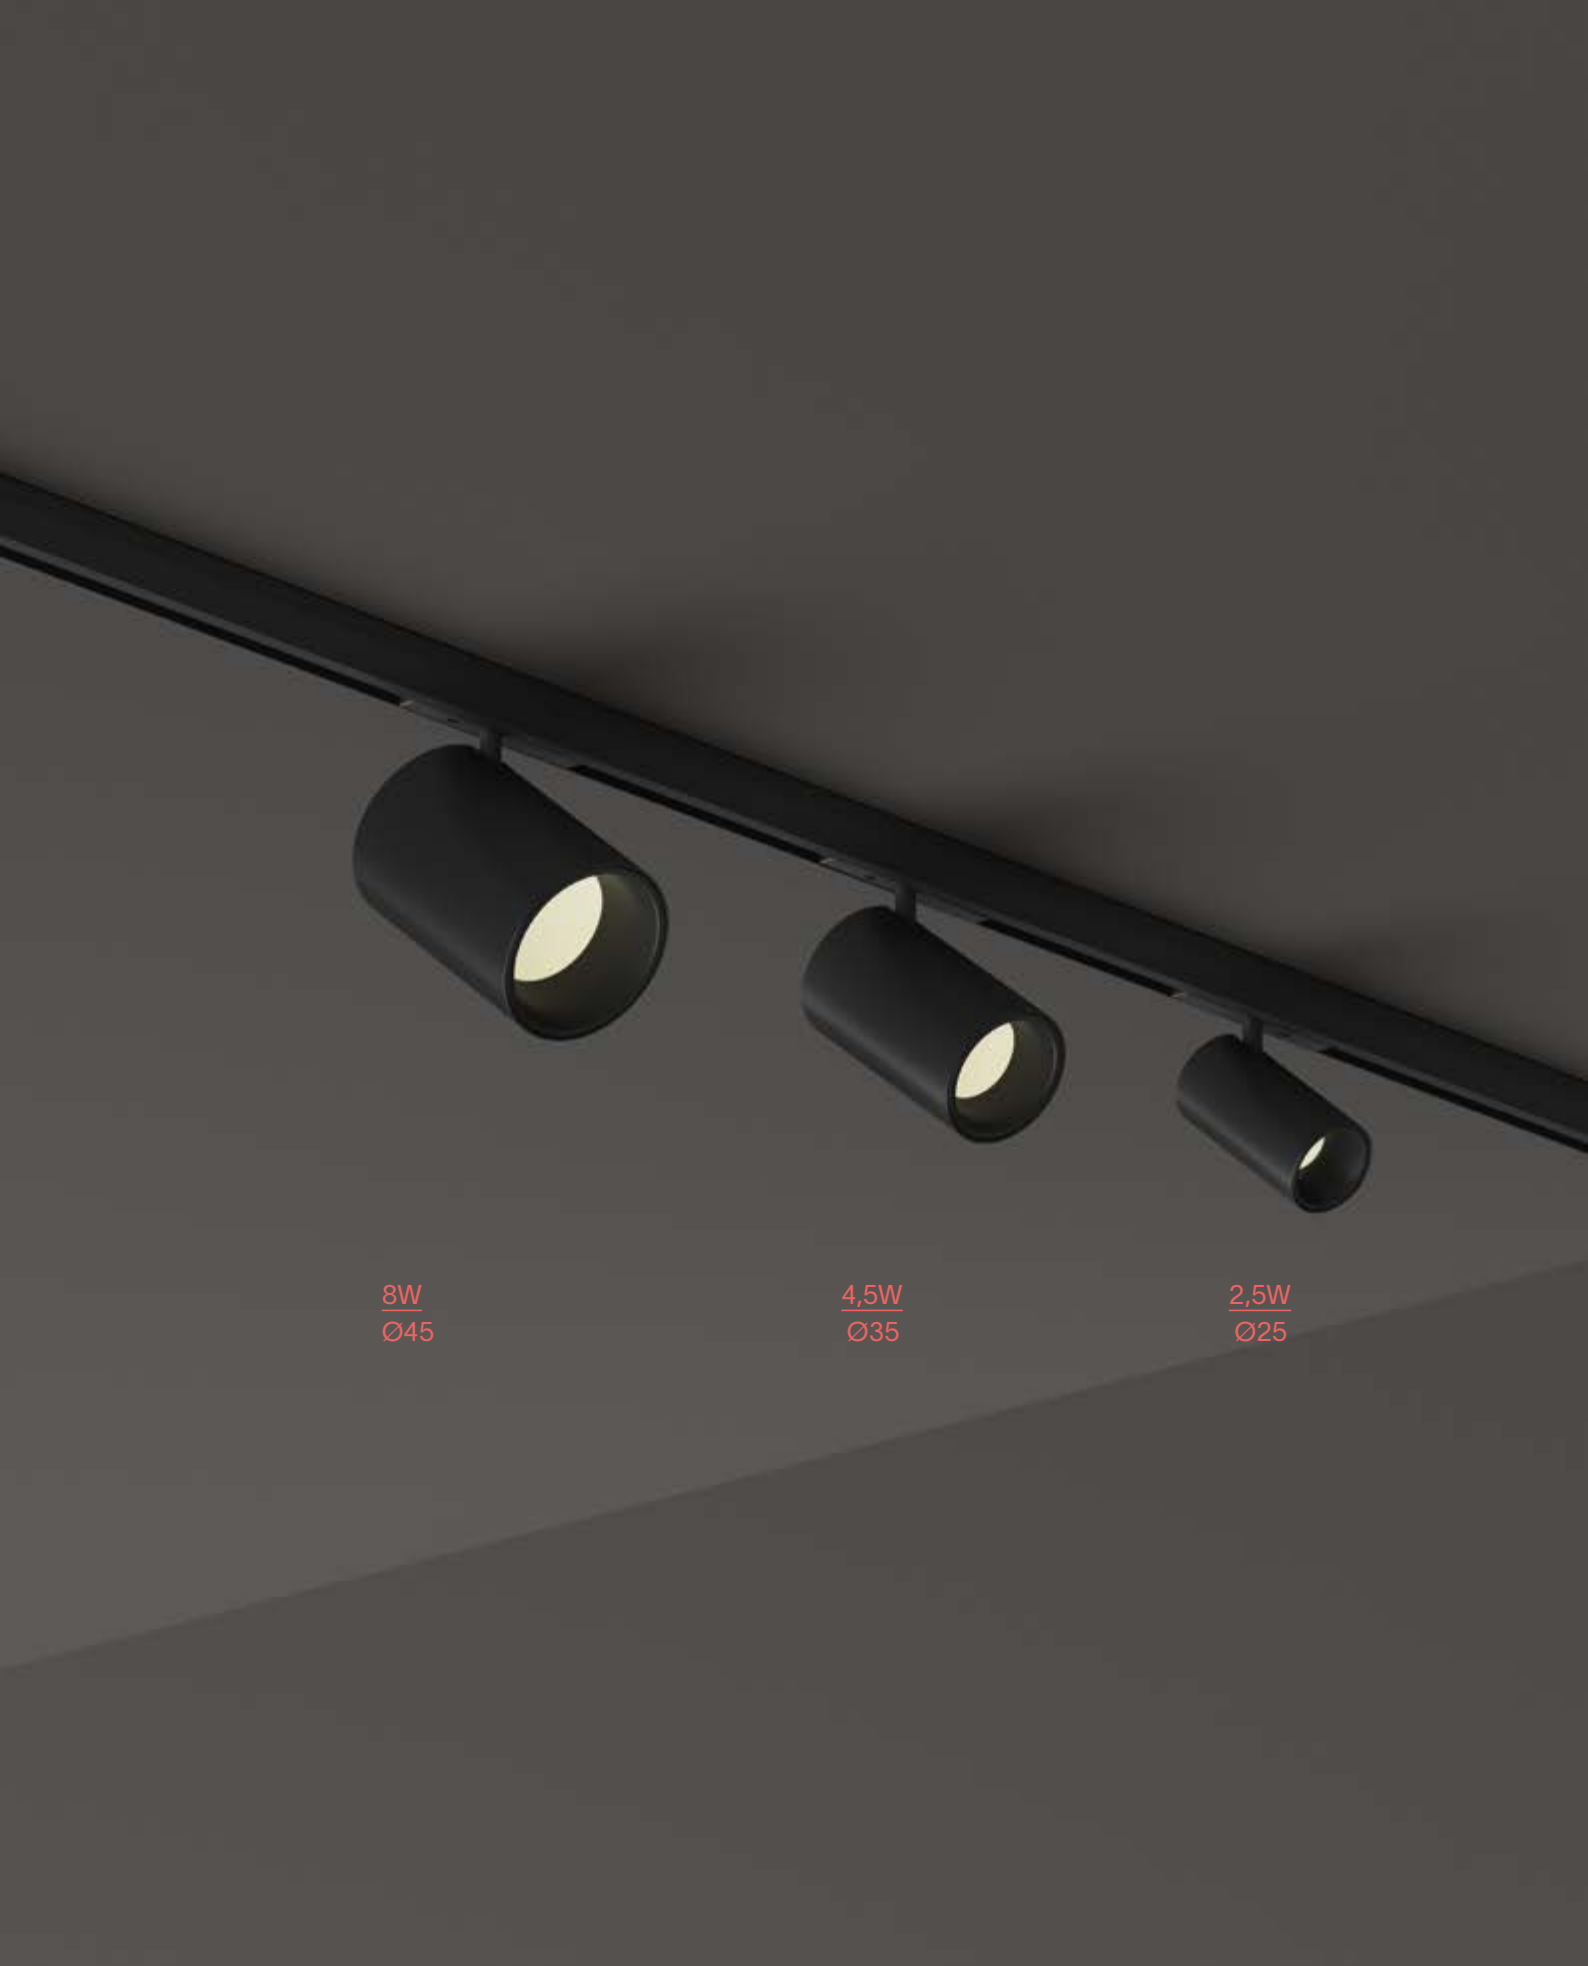




8W
Ø45



4,5W
Ø35

2,5W
Ø25

deva disc

 IP20		MacAdam: SDCM 3 LED COB BRIDGELUX 30.000 h life		 light beam: ACCENT		Material: Aluminum																							
   0,110 Kg/0,0004 m³				Power		Installation		Beam		CRI																			
				5W		TRACK		38°		≥90																			
				Control		Lumen		CCT		Finish		Code		€															
				On-Off		500 lm		3000 K		● Black		332840		46															
				On-Off		530 lm		4000 K		● Black		370262		46															
 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>863</td><td>0,68</td></tr><tr><td>2</td><td>216</td><td>1,40</td></tr><tr><td>3</td><td>96</td><td>2,00</td></tr><tr><td>4</td><td>54</td><td>2,70</td></tr><tr><td>5</td><td>35</td><td>3,40</td></tr></table>				m	lx	øm	1	863	0,68	2	216	1,40	3	96	2,00	4	54	2,70	5	35	3,40	Driver		No					
				m	lx	øm																							
1	863	0,68																											
2	216	1,40																											
3	96	2,00																											
4	54	2,70																											
5	35	3,40																											

 IP20		MacAdam: SDCM 3 LED SMD 30.000 h life		 light beam: ACCENT		Material: Aluminum																							
   0,330 Kg/0,0021 m³				Power		Installation		Beam		CRI																			
				10W		TRACK		98°		≥90																			
				Control		Lumen		CCT		Finish		Code		€															
				On-Off		1100 lm		3000 K		● Black		332864		52															
				On-Off		1150 lm		4000 K		● Black		370019		52															
 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>280</td><td>3,30</td></tr><tr><td>2</td><td>70</td><td>6,60</td></tr><tr><td>3</td><td>31</td><td>9,80</td></tr><tr><td>4</td><td>17</td><td>13,00</td></tr><tr><td>5</td><td>11</td><td>16,00</td></tr></table>				m	lx	øm	1	280	3,30	2	70	6,60	3	31	9,80	4	17	13,00	5	11	16,00	Driver		No					
				m	lx	øm																							
1	280	3,30																											
2	70	6,60																											
3	31	9,80																											
4	17	13,00																											
5	11	16,00																											

 IP20		MacAdam: SDCM 3 LED SMD 30.000 h life		 light beam: WIDE		Material: Aluminum																							
   0,430 Kg/0,0021 m³				Power		Installation		Beam		CRI																			
				15W		TRACK		98°		≥90																			
				Control		Lumen		CCT		Finish		Code		€															
				On-Off		1750 lm		3000 K		● Black		332901		63															
				On-Off		1800 lm		4000 K		● Black		370057		63															
 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>309</td><td>3,30</td></tr><tr><td>2</td><td>77</td><td>6,60</td></tr><tr><td>3</td><td>34</td><td>9,80</td></tr><tr><td>4</td><td>19</td><td>13,00</td></tr><tr><td>5</td><td>12</td><td>16,00</td></tr></table>				m	lx	øm	1	309	3,30	2	77	6,60	3	34	9,80	4	19	13,00	5	12	16,00	Driver		No					
				m	lx	øm																							
1	309	3,30																											
2	77	6,60																											
3	34	9,80																											
4	19	13,00																											
5	12	16,00																											





332840







332901



deva accent

 IP20		MacAdam: SDCM 3 LED SMD 30.000 h life		 light beam: ACCENT		Material: Aluminum																	
   0,070 Kg/0,0005 m³				Power	Installation	Beam	CRI																
				5W	TRACK	34°	≥90																
				Control	Lumen	CCT	Finish	Code	€														
				On-Off	350 lm	3000 K	● Black	332758	35														
On-Off	360 lm	4000 K	● Black	369907	35																		
Photometry <table><tr><td>m</td><td>lx</td><td>øm</td></tr><tr><td>1</td><td>913</td><td>0,51</td></tr><tr><td>2</td><td>228</td><td>1,00</td></tr><tr><td>3</td><td>101</td><td>1,50</td></tr><tr><td>4</td><td>57</td><td>2,10</td></tr><tr><td>5</td><td>37</td><td>2,60</td></tr></table>				m	lx	øm	1	913	0,51	2	228	1,00	3	101	1,50	4	57	2,10	5	37	2,60	Driver No	
				m	lx	øm																	
1	913	0,51																					
2	228	1,00																					
3	101	1,50																					
4	57	2,10																					
5	37	2,60																					

 IP20		MacAdam: SDCM 3 LED SMD OSRAM 30.000 h life		 light beam: ACCENT		Material: Aluminum																	
   0,140 Kg/0,0005 m³				Power	Installation	Beam	CRI																
				10W	TRACK	34°	≥90																
				Control	Lumen	CCT	Finish	Code	€														
				On-Off	900 lm	3000 K	● Black	332734	46														
On-Off	940 lm	4000 K	● Black	369938	46																		
Photometry <table><tr><td>m</td><td>lx</td><td>øm</td></tr><tr><td>1</td><td>3030</td><td>0,51</td></tr><tr><td>2</td><td>758</td><td>1,00</td></tr><tr><td>3</td><td>337</td><td>1,50</td></tr><tr><td>4</td><td>189</td><td>2,10</td></tr><tr><td>5</td><td>121</td><td>2,60</td></tr></table>				m	lx	øm	1	3030	0,51	2	758	1,00	3	337	1,50	4	189	2,10	5	121	2,60	Driver No	
				m	lx	øm																	
1	3030	0,51																					
2	758	1,00																					
3	337	1,50																					
4	189	2,10																					
5	121	2,60																					

   0,230 Kg/0,0014 m³				Power	Installation	Beam	CRI																
				14W	TRACK	34°	≥90																
				Control	Lumen	CCT	Finish	Code	€														
				On-Off	1400 lm	3000 K	● Black	332710	58														
On-Off	1450 lm	4000 K	● Black	369976	58																		
Photometry <table><tr><td>m</td><td>lx</td><td>øm</td></tr><tr><td>1</td><td>2698</td><td>0,51</td></tr><tr><td>2</td><td>675</td><td>1,00</td></tr><tr><td>3</td><td>300</td><td>1,50</td></tr><tr><td>4</td><td>169</td><td>2,10</td></tr><tr><td>5</td><td>108</td><td>2,60</td></tr></table>				m	lx	øm	1	2698	0,51	2	675	1,00	3	300	1,50	4	169	2,10	5	108	2,60	Driver No	
				m	lx	øm																	
1	2698	0,51																					
2	675	1,00																					
3	300	1,50																					
4	169	2,10																					
5	108	2,60																					



Deva Accent 145 mm



Deva Accent 241 mm



Deva Accent 335 mm




deva wide inner

IP20


MacAdam: SDCM 3 | LED SMD | 30.000 h life

light beam: WIDE


Material: Aluminum

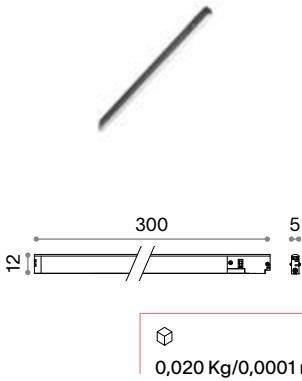

Power	Installation	Beam	CRI																				
6W	TRACK	100°	≥90																				
Control	Lumen	CCT	Finish	Code	€																		
On-Off	700 lm	3000 K	● Black	332949	29																		
On-Off	740 lm	4000 K	● Black	370309	29																		
Photometry			Driver																				
			No																				
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>116</td><td>6,0</td></tr><tr><td>2</td><td>29</td><td>12</td></tr><tr><td>3</td><td>13</td><td>18</td></tr><tr><td>4</td><td>7,3</td><td>24</td></tr><tr><td>5</td><td>4,7</td><td>30</td></tr></table>			m	lx	øm	1	116	6,0	2	29	12	3	13	18	4	7,3	24	5	4,7	30			
m	lx	øm																					
1	116	6,0																					
2	29	12																					
3	13	18																					
4	7,3	24																					
5	4,7	30																					

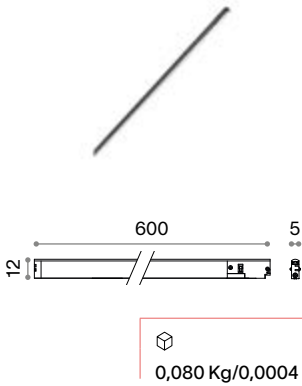

Power	Installation	Beam	CRI																				
11W	TRACK	100°	≥90																				
Control	Lumen	CCT	Finish	Code	€																		
On-Off	1400 lm	3000 K	● Black	332925	40																		
On-Off	1500 lm	4000 K	● Black	370347	40																		
Photometry			Driver																				
			No																				
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>161</td><td>6,0</td></tr><tr><td>2</td><td>40</td><td>12</td></tr><tr><td>3</td><td>18</td><td>18</td></tr><tr><td>4</td><td>10</td><td>24</td></tr><tr><td>5</td><td>6,4</td><td>30</td></tr></table>			m	lx	øm	1	161	6,0	2	40	12	3	18	18	4	10	24	5	6,4	30			
m	lx	øm																					
1	161	6,0																					
2	40	12																					
3	18	18																					
4	10	24																					
5	6,4	30																					

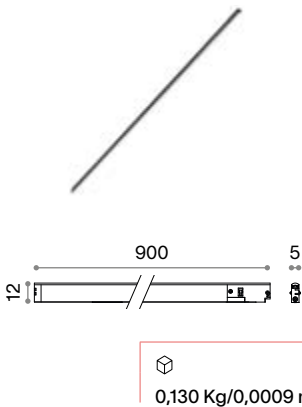

Power	Installation	Beam	CRI																				
16W	TRACK	100°	≥90																				
Control	Lumen	CCT	Finish	Code	€																		
On-Off	2100 lm	3000 K	● Black	332895	58																		
On-Off	2200 lm	4000 K	● Black	370378	58																		
Photometry			Driver																				
			No																				
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>385</td><td>6,0</td></tr><tr><td>2</td><td>96</td><td>12</td></tr><tr><td>3</td><td>43</td><td>18</td></tr><tr><td>4</td><td>24</td><td>24</td></tr><tr><td>5</td><td>15</td><td>30</td></tr></table>			m	lx	øm	1	385	6,0	2	96	12	3	43	18	4	24	24	5	15	30			
m	lx	øm																					
1	385	6,0																					
2	96	12																					
3	43	18																					
4	24	24																					
5	15	30																					



Deva Wide Inner 300 mm







Deva Wide Inner 600 mm



Deva Wide Inner 900 mm



deva wide outer

 IP20		MacAdam: SDCM 3 LED SMD 30.000 h life		 light beam: WIDE		Material: Aluminum																							
  				Power		Installation		Beam		CRI																			
				8W		TRACK		100°		≥90																			
				Control		Lumen		CCT		Finish		Code		€															
				On-Off		900 lm		3000 K		● Black		332871		29															
				Photometry				Driver																					
				 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>359</td><td>1,90</td></tr><tr><td>2</td><td>90</td><td>3,70</td></tr><tr><td>3</td><td>40</td><td>5,60</td></tr><tr><td>4</td><td>22</td><td>7,50</td></tr><tr><td>5</td><td>14</td><td>9,40</td></tr></table>				m	lx	øm	1	359	1,90	2	90	3,70	3	40	5,60	4	22	7,50	5	14	9,40	No			
m	lx	øm																											
1	359	1,90																											
2	90	3,70																											
3	40	5,60																											
4	22	7,50																											
5	14	9,40																											
  				Power		Installation		Beam		CRI																			
				12W		TRACK		100°		≥90																			
				Control		Lumen		CCT		Finish		Code		€															
				On-Off		1350 lm		3000 K		● Black		332833		40															
				Photometry				Driver																					
				 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>257</td><td>1,90</td></tr><tr><td>2</td><td>64</td><td>3,70</td></tr><tr><td>3</td><td>29</td><td>5,60</td></tr><tr><td>4</td><td>16</td><td>7,50</td></tr><tr><td>5</td><td>10</td><td>9,40</td></tr></table>				m	lx	øm	1	257	1,90	2	64	3,70	3	29	5,60	4	16	7,50	5	10	9,40	No			
m	lx	øm																											
1	257	1,90																											
2	64	3,70																											
3	29	5,60																											
4	16	7,50																											
5	10	9,40																											
  				Power		Installation		Beam		CRI																			
				21W		TRACK		100°		≥90																			
				Control		Lumen		CCT		Finish		Code		€															
				On-Off		2700 lm		3000 K		● Black		332802		58															
				Photometry				Driver																					
				 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>1104</td><td>1,90</td></tr><tr><td>2</td><td>276</td><td>3,70</td></tr><tr><td>3</td><td>123</td><td>5,60</td></tr><tr><td>4</td><td>69</td><td>7,50</td></tr><tr><td>5</td><td>44</td><td>9,40</td></tr></table>				m	lx	øm	1	1104	1,90	2	276	3,70	3	123	5,60	4	69	7,50	5	44	9,40	No			
m	lx	øm																											
1	1104	1,90																											
2	276	3,70																											
3	123	5,60																											
4	69	7,50																											
5	44	9,40																											



Deva Wide Outer 346 mm



Deva Wide Outer 646 mm



Deva Wide Outer 945 mm



deva pendant




IP20

MacAdam: SDCM 3 | LED COB BRIDGELUX | 30.000 h life



light beam: ACCENT

Material: Aluminum







0,280 Kg/0,0009 m³

Power	Installation	Beam	CRI																				
6W	TRACK	34°	≥90																				
Control	Lumen	CCT	Finish	Code	€																		
On-Off	550 lm	3000 K	● Black	332932	52																		
On-Off	570 lm	4000 K	● Black	370095	52																		
Photometry			Driver																				
			No																				
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>742</td><td>0,68</td></tr><tr><td>2</td><td>186</td><td>1,40</td></tr><tr><td>3</td><td>82</td><td>2,00</td></tr><tr><td>4</td><td>46</td><td>2,70</td></tr><tr><td>5</td><td>30</td><td>3,40</td></tr></table>			m	lx	øm	1	742	0,68	2	186	1,40	3	82	2,00	4	46	2,70	5	30	3,40			
m	lx	øm																					
1	742	0,68																					
2	186	1,40																					
3	82	2,00																					
4	46	2,70																					
5	30	3,40																					





deva surface



	IP20	TRACK	No mounting Kit required, direct ceiling installation Maximum length per power source: 10 meters				Material: Aluminum	
 			Length	Weight	Volume	Finish	Code	€
			1000 mm	0,280 Kg	0,0003 m³	● Black	332475	23
			2000 mm	0,470 Kg	0,0162 m³	● Black	332482	46
	IP20	ROUND TRACK	Optional				Material: Aluminum	
 			Weight	Volume	Control	Finish	Code	€
			0,017 Kg	0,0008 m³	On-Off	● Black	339375	105
	IP20	L-JOINT	Optional				Material: Aluminum	
 			Weight	Volume	Control	Finish	Code	€
			0,016 Kg	0,0001 m³	On-Off	● Black	339382	47
	IP20	LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
 			Weight	Volume	Control	Finish	Code	€
			0,009 Kg	0,0002 m³	On-Off	● Black	339368	21
	IP20	POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 140W				Material: Aluminum	
  Cable length 1500 mm			Weight	Volume	Control	Finish	Code	€
			0,006 Kg	0,0002 m³	On-Off	● Black	332581	17
	DRIVER ON/OFF		Required					
			Power	Output	Measure (L x H x W)	Code	€	
			75 W	24 Vdc	168x30x38 mm	332659	75	
			150 W	24 Vdc	227x30x38 mm	332628	109	
END CAPS KIT							Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€	
			Yes	10 x 7 x 15 mm	● Black	332635	4	
SUSPENSION KIT							Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€	
			Yes	8 x 7 x 2049 mm	● Black	332703	17	

deva surface assembly plans

- 01 End cap
- 02 Track 1000 mm
- 03 Linear joint
- 04 Track 2000 mm
- 05 Round track
- 06 Suspension Kit
- 07 Power supply connector
- 08 Driver



deva recessed





	IP20	TRACK	No mounting Kit required, direct ceiling installation Maximum length per power source: 10 meters				Material: Aluminum	
			Length	Weight	Volume	Finish	Code	€
			1000 mm	0,370 Kg	0,0010 m³	● Black	332529	23
			2000 mm	0,670 Kg	0,0020 m³	● Black	332536	46
	IP20	ROUND TRACK	Optional				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,267 Kg	0,0026 m³	On-Off	● Black	339405	105
	IP20	L-JOINT	Optional				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,030 Kg	0,0002 m³	On-Off	● Black	339412	47
	IP20	LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,020 Kg	0,0002 m³	On-Off	● Black	339399	21
	IP20	POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 140W				Material: Aluminum	
 Cable length 1500 mm			Weight	Volume	Control	Finish	Code	€
			0,060 Kg	0,0002 m³	On-Off	● Black	332581	17
	DRIVER ON/OFF		Required					
			Power	Output	Measure (L x H x W)	Code		€
			75 W	24 Vdc	168x30x38 mm	332659		75
			150 W	24 Vdc	227x30x38 mm	332628		109
END CAPS KIT							Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€	
			Yes	10 x 7 x 15 mm	● Black	332635	4	

deva recessed assembly plans

- 01 End cap
- 02 Track 1000 mm
- 03 Round track
- 04 Track 2000 mm
- 05 L-joint
- 06 Power supply connector
- 07 Driver



deva recessed easy

 IP20	TRACK	No mounting Kit required, direct ceiling installation Maximum length per power source: 10 meters				Material: Aluminum	
 		Length	Weight	Volume	Finish	Code	€
		1000 mm	0,370 Kg	0,0065 m ³	● Black	332499	29
		2000 mm	0,870 Kg	0,0450 m ³	● Black	332512	58
 IP20	L-JOINT	Optional				Material: Aluminum	
 		Weight	Volume	Control	Finish	Code	€
		0,030 Kg	0,0001 m ³	On-Off	● Black	339429	47
 IP20	LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
 		Weight	Volume	Control	Finish	Code	€
		0,020 Kg	0,0001 m ³	On-Off	● Black	339399	21
 IP20	POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 140W				Material: Aluminum	
  Cable length 1500 mm		Weight	Volume	Control	Finish	Code	€
		0,060 Kg	0,0002 m ³	On-Off	● Black	332581	17
 DRIVER ON/OFF		Required					
		Power	Output	Measure (L x H x W)	Code	€	
		75 W	24 Vdc	168x30x38 mm	332659	75	
		150 W	24 Vdc	227x30x38 mm	332628	109	
						Material: Aluminum	
		Required	Measure (L x H x W)	Finish	Code	€	
		Yes	10 x 7 x 15 mm	● Black	332635	4	

deva recessed easy assembly plans

- 01 End cap
- 02 Track 1000 mm
- 03 Linear joint
- 04 Track 2000 mm
- 05 L-joint
- 06 Power supply connector
- 07 Driver



STICK









Linear dimmable system consisting of an extruded aluminium profile and magnetically attached lighting elements.



1:1 Scale representation
3W ø 22mm

stick spot single

 IP20		LED SMD BRIDGELUX 50.000 h life		 light beam: SPOT		Material: Aluminum									
   90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
   90°				Photometry				Driver							
												No			
 IP20		LED SMD BRIDGELUX 50.000 h life		 light beam: ACCENT		Material: Aluminum									
   90°				Power		Installation		Beam		CRI					
				5W		TRACK		30°		≥90					
				Lumen		CCT		Finish		Code		€			
				390 lm		2700 K		● Black		345055		50			
				400 lm		3000 K		● White		364117		50			
400 lm		3000 K		● Black		329529		50							
   90°				Photometry				Driver							
												No			
 IP20		LED SMD BRIDGELUX 50.000 h life		 light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life		light beam: SPOT		Material: Aluminum									
 90°				Power		Installation		Beam		CRI					
				3W		TRACK		24°		≥90					
				Lumen		CCT		Finish		Code		€			
				200 lm		2700 K		● Black		345048		45			
				210 lm		3000 K		● White		364100		45			
210 lm		3000 K		● Black		329505		45							
 90°				Photometry				Driver							
												No			
IP20		LED SMD BRIDGELUX 50.000 h life													

stick spot single



IP20


LED SMD BRIDGELUX

| 50.000 h life



light beam: ACCENT

Material: Aluminum





90°



355°



0,018 Kg/0,0008 m³

Power	Installation	Beam	CRI
7W	TRACK	36°	≥90

Lumen	CCT	Finish	Code	€
600 lm	2700 K	● Black	345062	80
620 lm	3000 K	● White	369983	80
620 lm	3000 K	● Black	343501	80


Photometry



m	lx	øm
1	922	0.70
2	230	1.40
3	102	2.10
4	58	2.80
5	37	3.50

Driver

No





90°



355°




0,018 Kg/0,0007 m³

Power	Installation	Beam	CRI
10W	TRACK	36°	≥90

Lumen	CCT	Finish	Code	€
840 lm	2700 K	● Black	345079	85
860 lm	3000 K	● White	364124	85
860 lm	3000 K	● Black	343518	85

Photometry



m	lx	øm
1	514	0.62
2	128	1.20
3	57	1.90
4	32	2.50
5	21	3.10

Driver

No

76



7W / 10W
Ø42



5W
Ø32



3W
Ø22



The system is available in matt black or white for surface mounting (SURFACE) or recessed mounting in plasterboard (RECESSED). Can be combined with different lighting modules depending on the desired layout, which can be modified as required: SPOT SINGLE and DOUBLE modules for spot lighting, ACCENT modules for focused light and WIDE modules for diffused and uniform lighting. Ideal for lighting details or small spaces where great flexibility and high lighting quality are required, such as MUSEUMS, RESIDENTIAL and RETAIL spaces.



stick spot double



IP20


LED SMD BRIDGELUX

| 50.000 h life



light beam: SPOT

Material: Aluminum



90°


355°

0,060 Kg/0,0005 m³

Power	Installation	Beam	CRI
6W	TRACK	24°	≥90

Lumen	CCT	Finish	Code	€
400 lm	2700 K	● Black	345024	68
420 lm	3000 K	● White	374307	68
420 lm	3000 K	● Black	329512	68

Photometry



m	lx	ø(m)
1	1028	0,62
2	257	1,20
3	114	1,90
4	64	2,50
5	41	3,10

Driver
No



IP20


LED SMD BRIDGELUX

| 50.000 h life



light beam: ACCENT

Material: Aluminum



90°


355°

0,100 Kg/0,0006 m³

Power	Installation	Beam	CRI
10W	TRACK	30°	≥90

Lumen	CCT	Finish	Code	€
780 lm	2700 K	● Black	345031	75
800 lm	3000 K	● White	369969	75
800 lm	3000 K	● Black	329536	75

Photometry



m	lx	ø(m)
1	1645	0,62
2	411	1,20
3	183	1,90
4	103	2,50
5	66	3,10

Driver
No





stick accent




IP20

LED SMD BRIDGELUX | 50.000 h life




light beam: ACCENT

Material: Aluminum




0,080 Kg/0,0002 m³

Power	Installation	Beam	CRI																			
6W	TRACK	40°	≥90																			
Lumen	CCT	Finish	Code	€																		
600 lm	2700 K	● Black	344980	30																		
630 lm	3000 K	● White	364087	30																		
630 lm	3000 K	● Black	329468	30																		
Photometry		Driver																				
		No																				
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>958</td><td>0,64</td></tr><tr><td>2</td><td>240</td><td>1,30</td></tr><tr><td>3</td><td>106</td><td>1,90</td></tr><tr><td>4</td><td>60</td><td>2,60</td></tr><tr><td>5</td><td>38</td><td>3,20</td></tr></table>		m	lx	øm	1	958	0,64	2	240	1,30	3	106	1,90	4	60	2,60	5	38	3,20			
m	lx	øm																				
1	958	0,64																				
2	240	1,30																				
3	106	1,90																				
4	60	2,60																				
5	38	3,20																				



0,150 Kg/0,0006 m³

Power	Installation	Beam	CRI																			
12W	TRACK	40°	≥90																			
Lumen	CCT	Finish	Code	€																		
1200 lm	2700 K	● Black	345000	60																		
1250 lm	3000 K	● White	369921	60																		
1250 lm	3000 K	● Black	329475	60																		
Photometry		Driver																				
		No																				
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>1917</td><td>0.64</td></tr><tr><td>2</td><td>479</td><td>1.30</td></tr><tr><td>3</td><td>213</td><td>1.90</td></tr><tr><td>4</td><td>120</td><td>2.60</td></tr><tr><td>5</td><td>77</td><td>3.20</td></tr></table>		m	lx	øm	1	1917	0.64	2	479	1.30	3	213	1.90	4	120	2.60	5	77	3.20			
m	lx	øm																				
1	1917	0.64																				
2	479	1.30																				
3	213	1.90																				
4	120	2.60																				
5	77	3.20																				

stick accent



IP20

LED SMD BRIDGELUX | 50.000 h life



light beam: ACCENT

Material: Aluminum




0,080 Kg/0,0004 m³

Power	Installation	Beam	CRI
8W	TRACK	40°	≥90

Lumen	CCT	Finish	Code	€
830 lm	2700 K	● Black	344997	45
870 lm	3000 K	● White	364094	45
870 lm	3000 K	● Black	343525	45


Photometry



m	lx	øm
1	1259	0,75
2	315	1,50
3	140	2,20
4	79	3,00
5	50	3,70

Driver

No



0,140 Kg/0,0006 m³

Power	Installation	Beam	CRI
16W	TRACK	40°	≥90

Lumen	CCT	Finish	Code	€
1650 lm	2700 K	● Black	345017	70
1750 lm	3000 K	● White	369952	70
1750 lm	3000 K	● Black	343532	70

Photometry



m	lx	øm
1	2519	0,75
2	630	1,50
3	280	2,20
4	157	3,00
5	101	3,70

Driver


No

329468














329475



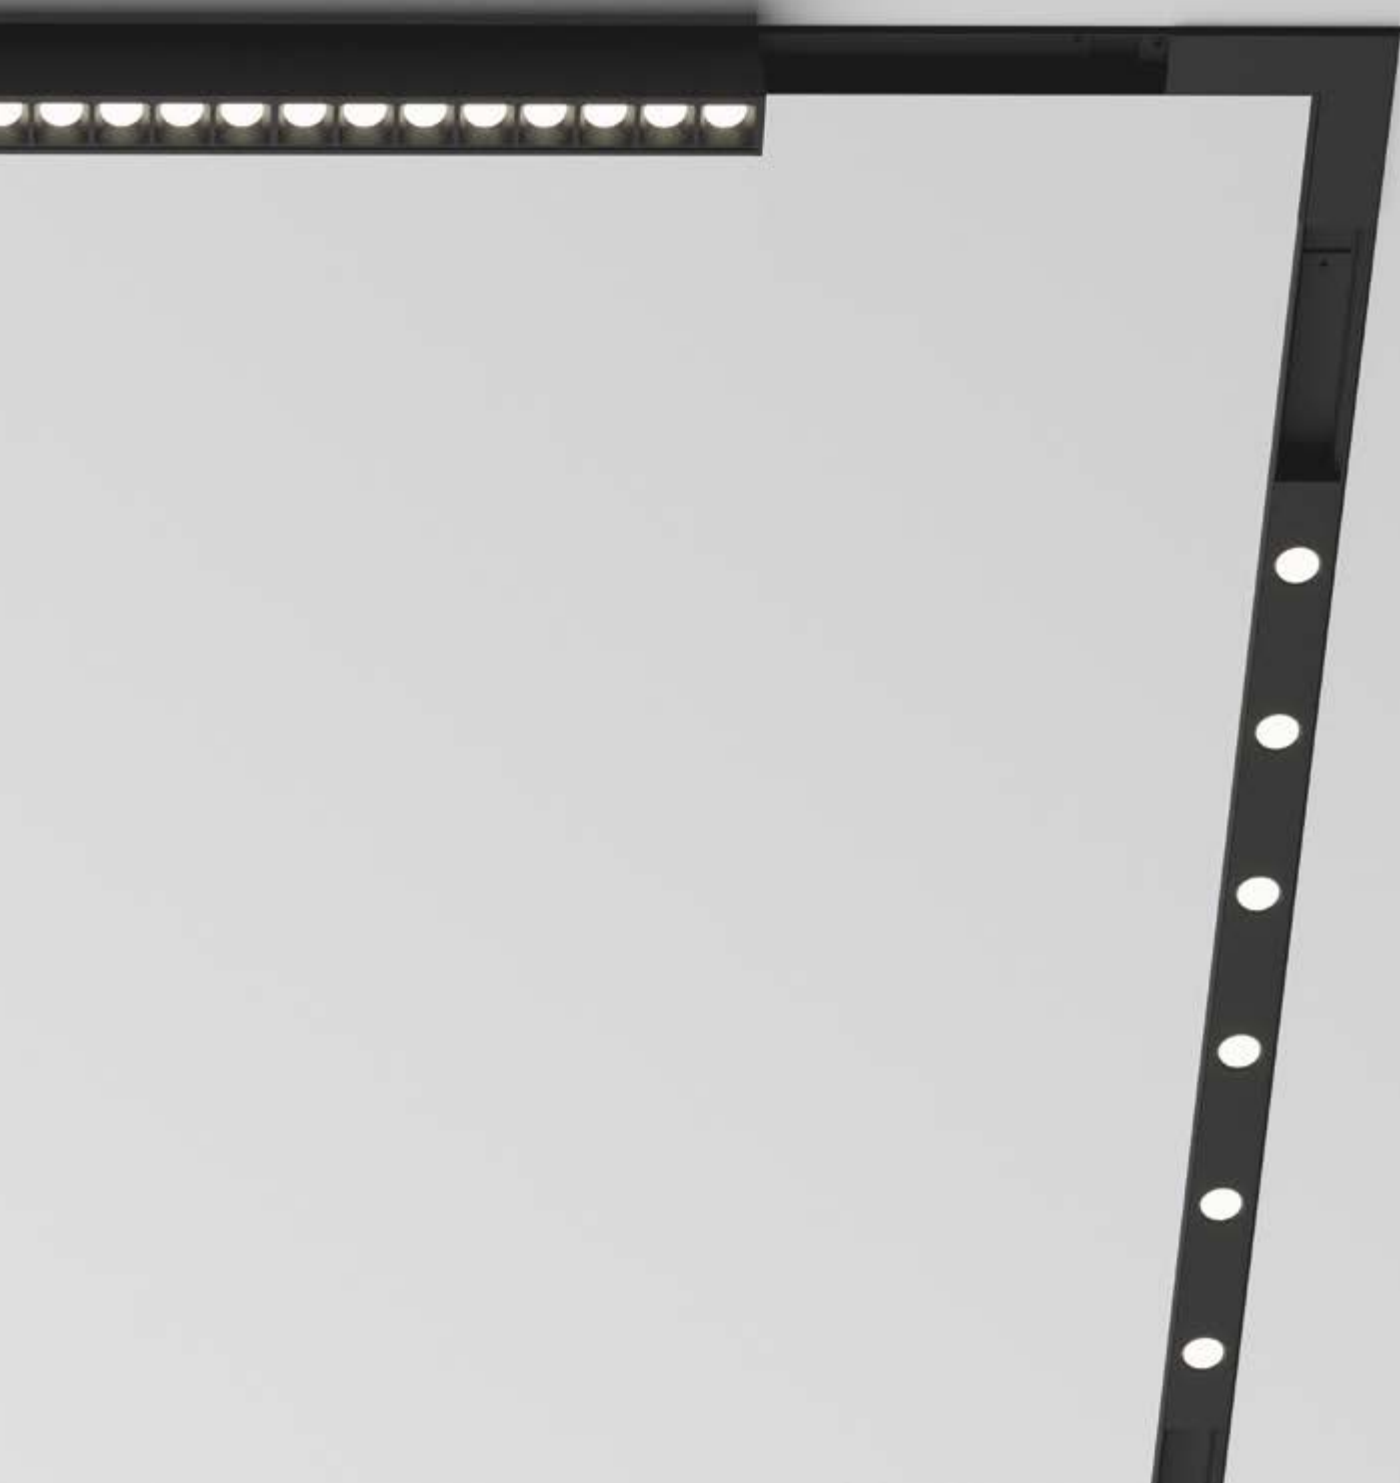

stick wide

 IP20		LED SMD BRIDGELUX 50.000 h life		 light beam: WIDE		Material: Aluminum																			
   0,070 Kg/0,0002 m³				Power	Installation	Beam	CRI																		
				6W	TRACK	110°	≥90																		
				Lumen	CCT	Finish	Code	€																	
				510 lm	2700 K	● Black	345086	25																	
				530 lm	3000 K	● White	364131	25																	
530 lm	3000 K	● Black	329444	25																					
   0,130 Kg/0,0005 m³				Photometry		Driver																			
				 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>138</td><td>2,50</td></tr><tr><td>2</td><td>35</td><td>4,90</td></tr><tr><td>3</td><td>15</td><td>7,40</td></tr><tr><td>4</td><td>8,7</td><td>9,80</td></tr><tr><td>5</td><td>5,5</td><td>12,00</td></tr></table>		m	lx	øm	1	138	2,50	2	35	4,90	3	15	7,40	4	8,7	9,80	5	5,5	12,00	No	
				m	lx	øm																			
1	138	2,50																							
2	35	4,90																							
3	15	7,40																							
4	8,7	9,80																							
5	5,5	12,00																							
   0,130 Kg/0,0005 m³				Power	Installation	Beam	CRI																		
				12W	TRACK	110°	≥90																		
				Lumen	CCT	Finish	Code	€																	
				1150 lm	2700 K	● Black	345093	50																	
				1200 lm	3000 K	● White	374291	50																	
1200 lm	3000 K	● Black	329451	50																					
   0,130 Kg/0,0005 m³				Photometry		Driver																			
				 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>277</td><td>2,50</td></tr><tr><td>2</td><td>69</td><td>4,90</td></tr><tr><td>3</td><td>31</td><td>7,40</td></tr><tr><td>4</td><td>17</td><td>9,80</td></tr><tr><td>5</td><td>11</td><td>12,00</td></tr></table>		m	lx	øm	1	277	2,50	2	69	4,90	3	31	7,40	4	17	9,80	5	11	12,00	No	
				m	lx	øm																			
1	277	2,50																							
2	69	4,90																							
3	31	7,40																							
4	17	9,80																							
5	11	12,00																							

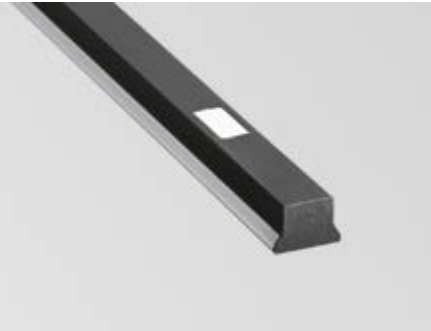

Stick Wide 300 mm







Stick Wide 600 mm





stick surface

 IP20		TRACK	Kit for profile installation and closing caps included			Material: Aluminum	
 			Length	Weight	Volume	Finish	Code €
			1000 mm	0,350 Kg	0,0017 m³	White	364063 30
			1000 mm	0,350 Kg	0,0017 m³	Black	329574 30
			2000 mm	0,700 Kg	0,0033 m³	White	370859 60
			2000 mm	0,700 Kg	0,0033 m³	Black	329581 60
 IP20		L-JOINT	Optional			Material: Aluminum	
 				Weight	Volume	Finish	Code €
				0,070 Kg	0,0004 m³	White	364155 37
				0,070 Kg	0,0004 m³	Black	330358 37
 IP20		BLIND COVER				Material: Aluminum	
			Required	Measure (L x H x W)		Finish	Code €
			No	1000 x 3 x 15 mm		White	370453 4
			No	1000 x 3 x 15 mm		Black	329635 4
			No	2000 x 3 x 15 mm		White	370491 6
			No	2000 x 3 x 15 mm		Black	329642 6
 IP20		LINEAR JOINT	Required - 1 Kit x linear connection			Material: Aluminum	
 				Weight	Volume	Finish	Code €
				0,03 Kg	0,0001 m³	White	370545 15
				0,03 Kg	0,0001 m³	Black	329710 15
 IP20		POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 140W			Material: Aluminum	
 				Weight	Volume	Finish	Code €
				0,08 Kg	0,0003 m³	White	364148 20
				0,08 Kg	0,0003 m³	Black	329703 20
		REMOTE DIMMABLE DRIVER 1-10V	Required				
			Power	Output	Measure (L x H x W)	Code	€
			150 W	48 Vdc	350x18x30 mm	329673	90
		ON-OFF DRIVER ON TRACK	Required - Cable length 300 mm It replaces Driver + Power supply connector				
			Power	Output	Measure (L x H x W)	Finish	Code €
			150 W	48 Vdc	305x32x16 mm	White	364162 80
			150 W	48 Vdc	305x32x16 mm	Black	329666 80





Cable length 300 mm

stick surface assembly plans

- 01 End cap
- 02 Blind cover
- 03 Linear joint
- 04 Track Surface 2000 mm
- 05 L-joint
- 06 Power supply connector
- 07 Driver



stick recessed

 IP20		TRACK	Kit for profile installation and closing caps included				Material: Aluminum	
 			Length	Weight	Volume	Finish	Code	€
			1000 mm	0,400 Kg	0,0017 m³	 White	364070	30
			1000 mm	0,400 Kg	0,0017 m³	 Black	329598	30
			2000 mm	0,800 Kg	0,0033 m³	 White	370828	60
			2000 mm	0,800 Kg	0,0033 m³	 Black	329604	60
 IP20		L-JOINT	Optional				Material: Aluminum	
 			Weight	Volume	Finish	Code	€	
			0,07 Kg	0,0004 m³	 White	372730	37	
			0,07 Kg	0,0004 m³	 Black	330365	37	
 IP20		BLIND COVER					Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€	
			No	1000 x 3 x 15 mm	 White	370453	4	
			No	1000 x 3 x 15 mm	 Black	329635	4	
			No	2000 x 3 x 15 mm	 White	370491	6	
			No	2000 x 3 x 15 mm	 Black	329642	6	
 IP20		LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
 			Weight	Volume	Finish	Code	€	
			0,03 Kg	0,0001 m³	 White	370545	15	
			0,03 Kg	0,0001 m³	 Black	329710	15	
 IP20		POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 140W				Material: Aluminum	
 			Weight	Volume	Finish	Code	€	
			0,08 Kg	0,0003 m³	 White	364148	20	
			0,08 Kg	0,0003 m³	 Black	329703	20	
		REMOTE DIMMABLE DRIVER 1-10V	Required					
			Power	Output	Measure (L x H x W)	Code	€	
			150 W	48 Vdc	350x18x30 mm	329673	90	
		ON-OFF DRIVER ON TRACK	Required - Cable length 300 mm It replaces Driver + Power supply connector					
 Cable length 300 mm			Power	Output	Measure (L x H x W)	Finish	Code	€
			150 W	48 Vdc	305x32x16 mm	 White	364162	80
			150 W	48 Vdc	305x32x16 mm	 Black	329666	80

Cable length 300 mm

stick surface assembly plans

- 01 End cap
- 02 Blind cover
- 03 Linear joint
- 04 Track Surface 2000 mm
- 05 L-joint
- 06 Power supply connector
- 07 Driver



EGO



Ego is the light that adapts with elegance, defining space with extreme flexibility.

ego spot single


IP20

PRO

MacAdam: SDCM 3 | LED SMD OSRAM | 50.000 h life

light beam: ACCENT

Material: Aluminum



90°

335°

0,151 Kg/0,0018 m³

Power	Installation	Beam	CRI
3W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	250 lm	3000 K	White	282978	82
On-Off	250 lm	3000 K	Black	257617	82
On-Off	300 lm	4000 K	Black	317977	82
1-10V	250 lm	3000 K	White	303673	100
1-10V	250 lm	3000 K	Black	303666	100
DALI	250 lm	3000 K	White	286402	125
DALI	250 lm	3000 K	Black	286396	125

Photometry



m	lx	øm
1	537	0,46
2	134	0,92
3	60	1,40
4	34	1,80
5	21	2,30

Driver

No

HONEYCOMB



LENS

Required	Finish	Code	€
No	Black	260853	5



Required	Beam	Finish	Code	€
No	18°	Clear	332062	5
No	45°	Clear	332079	5

ego spot single

IP20

PRO

MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life

light beam: ACCENT

Material: Aluminum

Power

8W

Installation

TRACK

Beam

30°

CRI

≥90

Control

Lumen

CCT

Finish

Code

€

On-Off

700 lm

2700 K

● Black

340388

97

On-Off

850 lm

3000 K

● White

282985

97

On-Off

850 lm

3000 K

● Black

257631

97

On-Off

1050 lm

4000 K

● Black

317984

97

1-10V

850 lm

3000 K

● White

303697

110

1-10V

850 lm

3000 K

● Black

303680

110

DALI

900 lm

2700 K

● Black

340364

135

DALI

850 lm

3000 K

● White

286426

135

DALI

850 lm

3000 K

● Black

286419

135

Photometry

90°

60°

30°

90°

60°

30°

1

2

3

4

5

lx

2393

598

266

150

96

dm

0.49

0.98

1.50

2.00

2.50

Driver

No

90°

335°

0,181 Kg/0,0018 m³

223

70

126

40

HONEYCOMB

LENS

Required		Finish	Code	€
No		● Black	260860	5

Required	Beam	Finish	Code	€
No	18°	● Clear	332086	5
No	45°	● Clear	332093	5

94

ego spot single


IP20

PRO

MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life

light beam: ACCENT

Material: Aluminum




90°	335°	0,300 Kg/0,0017 m³

Power	Installation	Beam	CRI
12W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	2700 K	● Black	340425	102
On-Off	1150 lm	3000 K	● White	282992	102
On-Off	1150 lm	3000 K	● Black	257655	102
On-Off	1200 lm	4000 K	● Black	321967	102
1-10V	1150 lm	3000 K	● White	303710	110
1-10V	1150 lm	3000 K	● Black	303703	110
DALI	1050 lm	2700 K	● Black	340401	140
DALI	1150 lm	3000 K	● White	286440	140
DALI	1150 lm	3000 K	● Black	286433	140

Photometry



m	lx	øm
1	2877	0,51
2	719	1,00
3	320	1,50
4	180	2,10
5	115	2,60

Driver

No

HONEYCOMB

LENS



Required	Finish	Code	€
No	● Black	260860	5




Required	Beam	Finish	Code	€
No	18°	● Clear	332086	5
No	45°	● Clear	332093	5

ego spot single



A linear system consisting of an extruded aluminium profile and lighting elements with mechanical safety fastening, offering endless configuration possibilities.

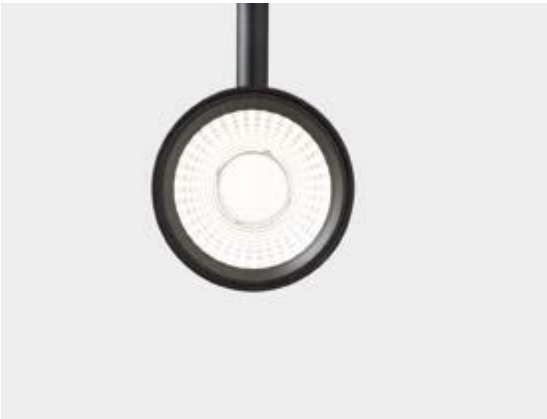




19W
Ø72


12W
Ø40

8W
Ø40

3W
Ø25

ego spot single

 IP20		 MacAdam: SDCM 3 LED COB CITIZEN 50.000 h life		 light beam: ACCENT		Material: Aluminum																			
   90°335°0,800 Kg/0,0035 m³				Power	Installation	Beam	CRI																		
				19W	TRACK	35°	≥90																		
				Control	Lumen	CCT	Finish	Code	€																
				On-Off	2200 lm	3000 K	 White	307558	143																
				On-Off	2200 lm	3000 K	 Black	305608	143																
				On-Off	2650 lm	4000 K	 Black	321998	143																
				1-10V	2200 lm	3000 K	 White	307527	155																
				1-10V	2200 lm	3000 K	 Black	307510	155																
				DALI	2200 lm	3000 K	 White	307541	185																
DALI	2200 lm	3000 K	 Black	307534	185																				
Photometry				Driver																					
 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>4476</td><td>0,57</td></tr><tr><td>2</td><td>1119</td><td>1,10</td></tr><tr><td>3</td><td>497</td><td>1,70</td></tr><tr><td>4</td><td>280</td><td>2,30</td></tr><tr><td>5</td><td>179</td><td>2,90</td></tr></table>				m	lx	øm	1	4476	0,57	2	1119	1,10	3	497	1,70	4	280	2,30	5	179	2,90	No			
m	lx	øm																							
1	4476	0,57																							
2	1119	1,10																							
3	497	1,70																							
4	280	2,30																							
5	179	2,90																							

   90°335°0,800 Kg/0,0035 m³				Power	Installation	Beam	CRI																		
				26W	TRACK	35°	≥90																		
				Control	Lumen	CCT	Finish	Code	€																
				On-Off	3050 lm	3000 K	 White	307602	155																
				On-Off	3050 lm	3000 K	 Black	305615	155																
				On-Off	3250 lm	4000 K	 Black	317991	155																
				1-10V	3050 lm	3000 K	 White	307572	165																
				1-10V	3050 lm	3000 K	 Black	307565	165																
				DALI	3050 lm	3000 K	 White	307596	185																
DALI	3050 lm	3000 K	 Black	307589	185																				
Photometry				Driver																					
 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>6816</td><td>0,56</td></tr><tr><td>2</td><td>1704</td><td>1,10</td></tr><tr><td>3</td><td>757</td><td>1,70</td></tr><tr><td>4</td><td>426</td><td>2,20</td></tr><tr><td>5</td><td>273</td><td>2,80</td></tr></table>				m	lx	øm	1	6816	0,56	2	1704	1,10	3	757	1,70	4	426	2,20	5	273	2,80	No			
m	lx	øm																							
1	6816	0,56																							
2	1704	1,10																							
3	757	1,70																							
4	426	2,20																							
5	273	2,80																							

		Required	Beam	Finish	Code	€
		No	20°	 Clear	332109	10
		No	55°	 Clear	332116	10







Available in matt black, matt white or satin-finish anodised brass finishes, Ego can be surface-mounted, suspended, recessed without edge, quick-fit or with an edge for false ceilings. With modular lighting modules, it is easily adaptable to the needs of any environment, from residential to commercial, and even museum and retail spaces. Perfect where high performance and a lighting quality that blends perfectly with the architecture is required.





1:1 Scale representation
Diameter 25 mm

ego spot double



IP20




MacAdam: SDCM 3 | LED SMD OSRAM | 50.000 h life




light beam: ACCENT

Material: Aluminum



Power	Installation	Beam	CRI
5W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	500 lm	3000 K	White	282947	102
On-Off	500 lm	3000 K	Black	257624	102
On-Off	600 lm	4000 K	Black	321714	102
1-10V	500 lm	3000 K	White	303611	117
1-10V	500 lm	3000 K	Black	303604	117
DALI	500 lm	3000 K	White	286341	148
DALI	500 lm	3000 K	Black	286334	148

Photometry

m	lx	cm
1	508	0.46
2	127	0.92
3	56	1.40
4	32	2.80
5	20	2.30

Driver
No



90°



335°



0,220 Kg/0,0009 m³

HONEYCOMB

LENS		Required	Finish	Code	€
		No	Black	260853	5

	Required	Beam	Finish	Code	€
	No	18°	Clear	332062	5
	No	45°	Clear	332079	5





ego spot double



IP20




MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life



light beam: ACCENT

Material: Aluminum



90°



335°




0,450 Kg/0,0017 m³

Power	Installation	Beam	CRI
16W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	2700 K	● Black	340265	138
On-Off	1700 lm	3000 K	● White	282954	138
On-Off	1700 lm	3000 K	● Black	257648	138
On-Off	2100 lm	4000 K	● Black	321806	138
1-10V	1900 lm	3000 K	● White	303635	150
1-10V	1900 lm	3000 K	● Black	303628	150
DALI	1400 lm	2700 K	● Black	340241	180
DALI	1700 lm	3000 K	● White	286365	180
DALI	1700 lm	3000 K	● Black	286358	180


Photometry



m	lx	ø(m)
1	2451	0,49
2	613	1,98
3	272	1,50
4	153	2,00
5	98	2,50

Driver

No



90°



335°




0,330 Kg/0,0028 m³

Power	Installation	Beam	CRI
24W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2300 lm	3000 K	● White	282961	148
On-Off	2300 lm	3000 K	● Black	257662	148
On-Off	2400 lm	4000 K	● Black	321844	148
1-10V	2300 lm	3000 K	● White	303659	155
1-10V	2300 lm	3000 K	● Black	303642	155
DALI	2300 lm	3000 K	● White	286389	185
DALI	2300 lm	3000 K	● Black	286372	185

Photometry



m	lx	ø(m)
1	9051	0,51
2	763	1,00
3	339	1,50
4	191	2,10
5	122	2,60

Driver

No

HONEYCOMB



LENS



Required	Finish	Code	€
No	● Black	260860	5



Required	Beam	Finish	Code	€
No	18°	● Clear	332086	5
No	45°	● Clear	332093	5




ego spot zoom

 IP20		 MacAdam: SDCM 3 LED COB CITIZEN 50.000 h life		 light beam: from SPOT to WIDE		Material: Aluminum																			
   0,460 Kg/0,0037 m³		Power		Installation		Beam		CRI																	
		10W		TRACK		20° - 40°		≥90																	
		Control		Lumen		CCT		Finish		Code		€													
		On-Off		900 lm		3000 K		● Black		330730		122													
		On-Off		1150 lm		4000 K		● Black		340197		122													
		DALI		900 lm		3000 K		● Black		330754		178													
		DALI		1150 lm		4000 K		● Black		340180		178													
Photometry  <table><tr><th>m</th><th>lx</th><th>cm</th></tr><tr><td>1</td><td>2185</td><td>0,67</td></tr><tr><td>2</td><td>546</td><td>1,30</td></tr><tr><td>3</td><td>243</td><td>2,00</td></tr><tr><td>4</td><td>137</td><td>2,70</td></tr><tr><td>5</td><td>87</td><td>3,30</td></tr></table>		m	lx	cm	1	2185	0,67	2	546	1,30	3	243	2,00	4	137	2,70	5	87	3,30	Driver No					
		m	lx	cm																					
1	2185	0,67																							
2	546	1,30																							
3	243	2,00																							
4	137	2,70																							
5	87	3,30																							


106



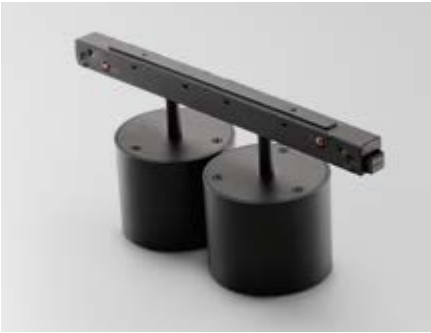


ego spot big

IP20 | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | UGR<19 | light beam: ACCENT | Material: Aluminum




0,470 Kg/0,0025 m³

Power	Installation	Beam	CRI		
10W	TRACK	38°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	1350 lm	3000 K	 White	327556	112
On-Off	1350 lm	3000 K	 Black	300764	112
Photometry			Driver		
			No		



0,750 Kg/0,0025 m³

Power	Installation	Beam	CRI		
20W	TRACK	38°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	3000 K	● White	327549	194
On-Off	2700 lm	3000 K	● Black	316307	194

Photometry																				
	<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>2984</td><td>0,71</td></tr><tr><td>2</td><td>741</td><td>1,40</td></tr><tr><td>3</td><td>329</td><td>2,10</td></tr><tr><td>4</td><td>185</td><td>2,80</td></tr><tr><td>5</td><td>119</td><td>3,60</td></tr></table>	m	lx	øm	1	2984	0,71	2	741	1,40	3	329	2,10	4	185	2,80	5	119	3,60	
m	lx	øm																		
1	2984	0,71																		
2	741	1,40																		
3	329	2,10																		
4	185	2,80																		
5	119	3,60																		

Driver
No





ego spot flat

IP20


PRO

MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life



light beam: ACCENT

Material: Aluminum



90°



0,480 Kg/0,0035 m³

Power	Installation	Beam	CRI
9W	TRACK	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1100 lm	3000 K	White	300504	108
On-Off	1100 lm	3000 K	Black	290614	108
1-10V	1100 lm	3000 K	White	303741	120
1-10V	1100 lm	3000 K	Black	303727	120
DALI	1100 lm	3000 K	White	300535	150
DALI	1100 lm	3000 K	Black	300528	150

Photometry



m	lx	cd/m²
1	2242	0,60
2	560	1,20
3	249	1,80
4	140	2,40
5	90	3,00

Driver

No



IIIIP20


PRO

MacAdam: SDCM 3 | LED SMD OSRAM | 50.000 h life

UGRUGR<19

light beam: ACCENT

Material: Aluminum



0,281 Kg/0,0013 m³

Power	Installation		Beam	CRI	
7W	TRACK		35°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	630 lm	2700 K	Black	340067	102
On-Off	700 lm	3000 K	White	282633	102
On-Off	700 lm	3000 K	Black	257792	102
On-Off	780 lm	4000 K	Black	323596	102
1-10V	700 lm	3000 K	White	303505	138
1-10V	700 lm	3000 K	Black	303499	138
DALI	630 lm	2700 K	Black	340043	148
DALI	700 lm	3000 K	White	286068	148
DALI	700 lm	3000 K	Black	286051	148


Photometry



m	lx	øm
1	1528	0,61
2	382	1,20
3	170	1,80
4	96	2,40
5	61	3,10

Driver

No



0,330 Kg/0,0011 m³

Power	Installation		Beam	CRI	
13W	TRACK		35°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	1250 lm	2700 K	Black	340104	142
On-Off	1400 lm	3000 K	White	282640	142
On-Off	1400 lm	3000 K	Black	257686	142
On-Off	1550 lm	4000 K	Black	317953	142
1-10V	1400 lm	3000 K	White	303529	174
1-10V	1400 lm	3000 K	Black	303512	174
DALI	1250 lm	2700 K	Black	340081	204
DALI	1400 lm	3000 K	White	286082	204
DALI	1400 lm	3000 K	Black	286075	204

Photometry



m	lx	øm
1	3121	0,61
2	780	1,20
3	347	1,80
4	195	2,40
5	125	3,00

Driver

No



Ego Accent 284 mm



Ego Accent 192 mm







ego wide



IP20




MacAdam: SDCM 3 | LED SMD SAMSUNG | 50.000 h life



light beam: WIDE


Material: Aluminum



0,200 Kg/0,0011 m³

Power	Installation		Beam	CRI	
7W	TRACK		110°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	850 lm	3000 K	White	283029	76
On-Off	850 lm	3000 K	Black	257709	76
On-Off	1000 lm	4000 K	Black	317960	76
1-10V	850 lm	3000 K	White	303796	120
1-10V	850 lm	3000 K	Black	303789	120
DALI	850 lm	3000 K	White	286501	125
DALI	850 lm	3000 K	Black	286495	125

Photometry



m	lx	øm
1	232	2,80
2	58	5,70
3	26	8,50
4	15	11,00
5	9,3	14,00

Driver

No



Ego Wide 1120 mm



Ego Wide 560 mm



Ego Wide 284 mm



MacAdam: SDCM 3 | LED SMD SAMSUNG | 50.000 h life



light beam: WIDE

Material: Aluminum



0,564 Kg/0,0018 m³

Power	Installation	Beam	CRI																				
13W	TRACK	110°	≥90																				
Control	Lumen	CCT	Finish	Code	€																		
On-Off	1350 lm	2700 K	● Black	340586	102																		
On-Off	1700 lm	3000 K	● White	283036	102																		
On-Off	1700 lm	3000 K	● Black	257716	102																		
On-Off	2000 lm	4000 K	● Black	322056	102																		
1-10V	1700 lm	3000 K	● White	303819	130																		
1-10V	1700 lm	3000 K	● Black	303802	130																		
DALI	1350 lm	2700 K	● Black	340562	145																		
DALI	1700 lm	3000 K	● White	286525	145																		
DALI	1700 lm	3000 K	● Black	286518	145																		
Photometry			Driver																				
			No																				
<table><tr><th>m</th><th>lx</th><th>dm</th></tr><tr><td>1</td><td>482</td><td>2,80</td></tr><tr><td>2</td><td>121</td><td>5,70</td></tr><tr><td>3</td><td>54</td><td>8,50</td></tr><tr><td>4</td><td>30</td><td>11,00</td></tr><tr><td>5</td><td>19</td><td>14,00</td></tr></table>			m	lx	dm	1	482	2,80	2	121	5,70	3	54	8,50	4	30	11,00	5	19	14,00			
m	lx	dm																					
1	482	2,80																					
2	121	5,70																					
3	54	8,50																					
4	30	11,00																					
5	19	14,00																					







0,900 Kg/0,0035 m³

Power	Installation		Beam	CRI																			
26W	TRACK		110°	≥90																			
Control	Lumen	CCT	Finish	Code	€																		
On-Off	2700 lm	2700 K	● Black	340623	148																		
On-Off	3400 lm	3000 K	● White	283043	148																		
On-Off	3400 lm	3000 K	● Black	257730	148																		
On-Off	4000 lm	4000 K	● Black	322070	148																		
1-10V	3400 lm	3000 K	● White	303833	160																		
1-10V	3400 lm	3000 K	● Black	303826	160																		
DALI	2700 lm	2700 K	● Black	340609	185																		
DALI	3400 lm	3000 K	● White	286549	185																		
DALI	3400 lm	3000 K	● Black	286532	185																		
Photometry			Driver																				
			No																				
<table><tr><th>m</th><th>lx</th><th>dm</th></tr><tr><td>1</td><td>619</td><td>2,50</td></tr><tr><td>2</td><td>155</td><td>4,90</td></tr><tr><td>3</td><td>69</td><td>7,40</td></tr><tr><td>4</td><td>39</td><td>9,80</td></tr><tr><td>5</td><td>25</td><td>12,00</td></tr></table>			m	lx	dm	1	619	2,50	2	155	4,90	3	69	7,40	4	39	9,80	5	25	12,00			
m	lx	dm																					
1	619	2,50																					
2	155	4,90																					
3	69	7,40																					
4	39	9,80																					
5	25	12,00																					



ego flexible

	IP20		MacAdam: SDCM 3 LED SMD OSRAM 50.000 h life		UGR<19		light beam: ACCENT	Material: Aluminum																		
  283 22 90° 0,620 Kg/0,0015 m³				Power	Installation	Beam	CRI																			
				13W	TRACK	35°	≥90																			
				Control	Lumen	CCT	Finish	Code	€																	
				On-Off	1400 lm	3000 K	 White	282718	178																	
				On-Off	1400 lm	3000 K	 Black	257846	178																	
				DALI	1400 lm	3000 K	 White	286105	215																	
				DALI	1400 lm	3000 K	 Black	286099	215																	
Photometry					Driver																					
					No																					
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>3112</td><td>0,61</td></tr><tr><td>2</td><td>778</td><td>1,20</td></tr><tr><td>3</td><td>346</td><td>1,80</td></tr><tr><td>4</td><td>194</td><td>2,40</td></tr><tr><td>5</td><td>124</td><td>3,00</td></tr></table>					m	lx	øm	1	3112	0,61	2	778	1,20	3	346	1,80	4	194	2,40	5	124	3,00				
m	lx	øm																								
1	3112	0,61																								
2	778	1,20																								
3	346	1,80																								
4	194	2,40																								
5	124	3,00																								

 IP20		MacAdam: SDCM 3 LED SMD SAMSUNG 50.000 h life		 light beam: WIDE		Material: Aluminum																			
  283 22 90° 0,620 Kg/0,0016 m³				Power		Installation		Beam		CRI															
				7W		TRACK		110°		≥90															
				Control		Lumen		CCT		Finish		Code		€											
				On-Off		850 lm		3000 K		 White		282725		122											
				On-Off		850 lm		3000 K		 Black		257839		122											
DALI		850 lm		3000 K		 White		286129		160															
DALI		850 lm		3000 K		 Black		286112		160															
 <table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>231</td><td>2,90</td></tr><tr><td>2</td><td>58</td><td>5,80</td></tr><tr><td>3</td><td>26</td><td>8,60</td></tr><tr><td>4</td><td>14</td><td>12,00</td></tr><tr><td>5</td><td>9</td><td>14,00</td></tr></table>				m	lx	øm	1	231	2,90	2	58	5,80	3	26	8,60	4	14	12,00	5	9	14,00	Driver			
				m	lx	øm																			
				1	231	2,90																			
2	58	5,80																							
3	26	8,60																							
4	14	12,00																							
5	9	14,00																							
No																									







ego pendant



IP20



MacAdam: SDCM 3 | 50.000 h life




UGR<19



light beam: ACCENT

Material: Aluminum



0,150 Kg/0,0021 m³

Power	Installation		Beam	CRI	Source
5,5W	TRACK		66°	≥90	LED COB CITIZEN
Control	Lumen	CCT	Finish	Code	€
On-Off	520 lm	3000 K	● Black	332451	92
1-10V	520 lm	3000 K	● Black	344782	110
DALI	520 lm	3000 K	● Black	344799	140


Photometry



m	lx	ø(m)
1	305	1,00
2	76	2,00
3	34	3,00
4	19	4,00
5	12	5,00

Driver

No



0,550 Kg/0,0025 m³

Power	Installation	Beam	CRI	Source
12W	TRACK	30°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	1150 lm	3000 K	● White	282879	148
On-Off	1150 lm	3000 K	● Black	257747	148
On-Off	1250 lm	4000 K	● Black	321653	148
1-10V	1150 lm	3000 K	● White	303598	158
1-10V	1150 lm	3000 K	● Black	303574	158
DALI	1150 lm	3000 K	● White	286327	190
DALI	1150 lm	3000 K	● Black	286310	190

Photometry



m	lx	ø(m)
1	2877	0,51
2	719	1,00
3	320	1,50
4	180	2,10
5	115	2,60

Driver

No



ego pendant




MacAdam: SDCM 3 | 50.000 h life



light beam: WIDE

Material: Aluminum



0,900 Kg/0,0108 m³

Power	Installation		CRI	Source	
10W	TRACK		≥90	LED COB CITIZEN	
Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	● White	327532	133
On-Off	1050 lm	3000 K	● Black	327525	133

Photometry




m	lx	øm
1	305	1,00
2	76	2,00
3	34	3,00
4	19	4,00
5	12	5,00

Driver

No



ego low
assembly plans

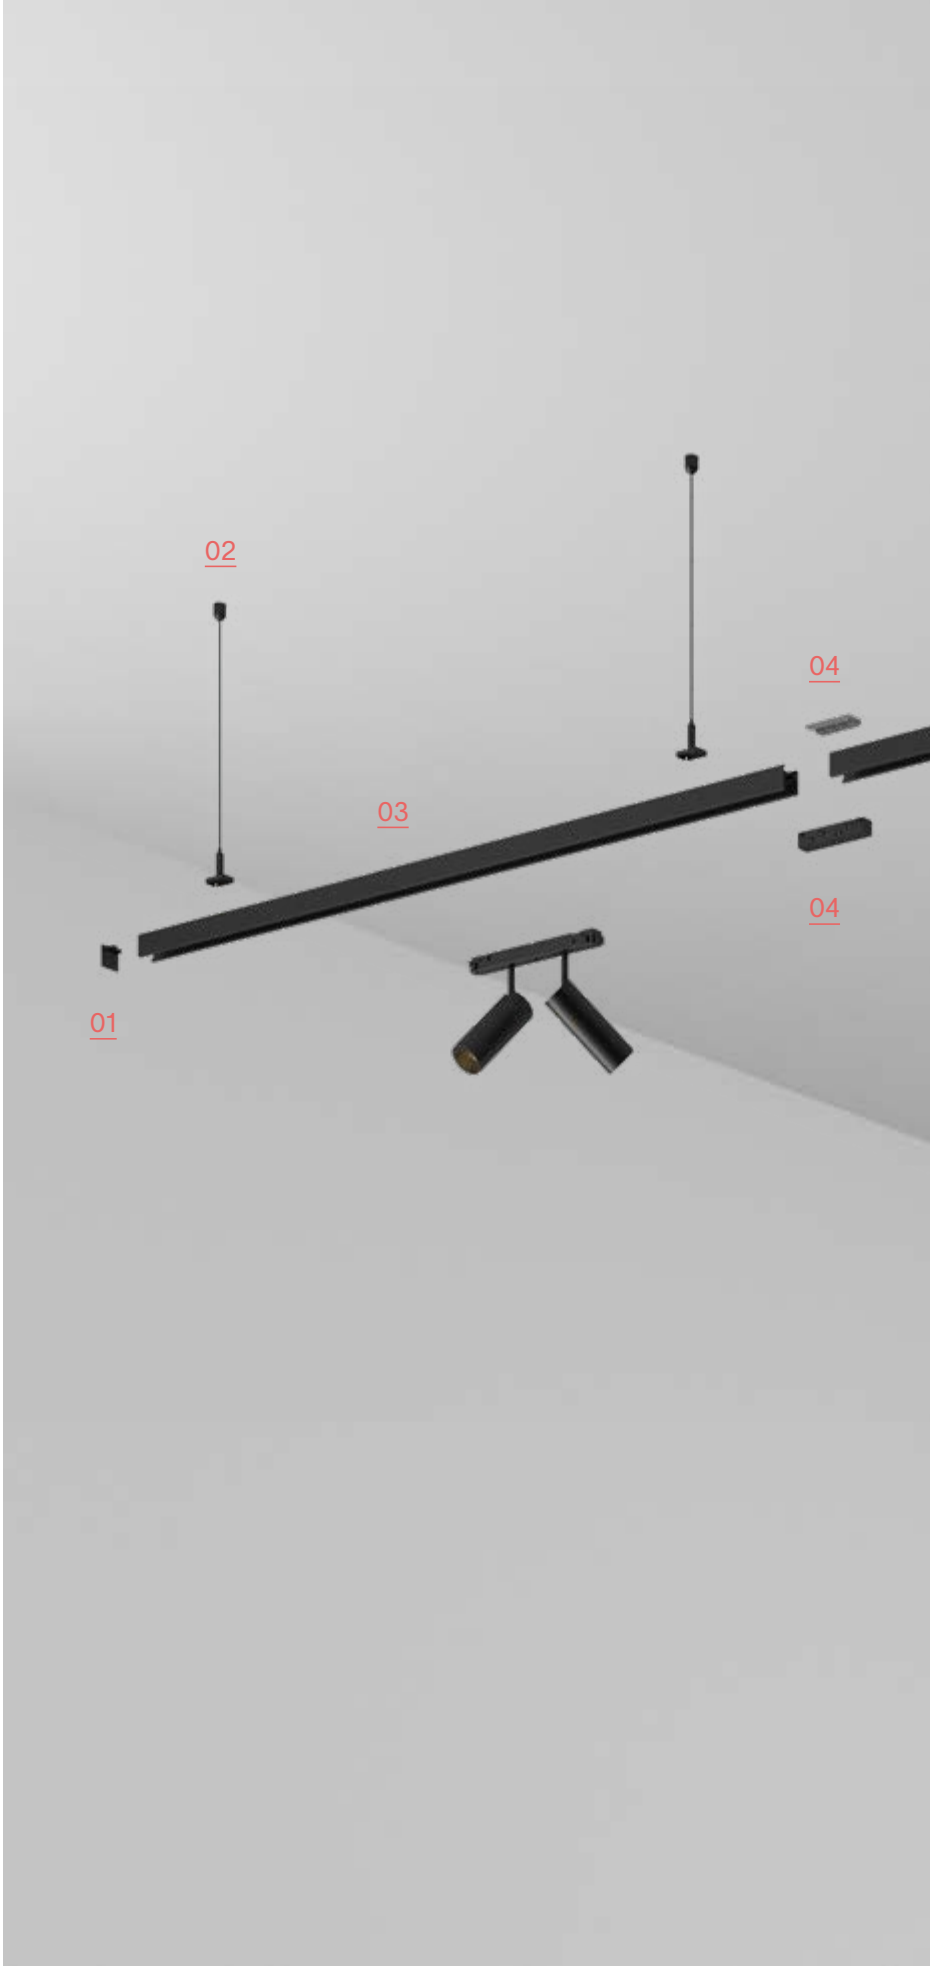

- 01 End cap no hole
- 02 Suspension Kit
- 03 Track Low 2000 mm
- 04 Linear joint
- 05 L-joint
- 06 Power supply connector
- 07 Ceiling cup with suspension Kit
- 08 Driver + Driver box
- 09 End cap no hole



	IP20	TRACK	No mounting Kit required, direct ceiling installation Maximum length per power source: 25 meters				Material: Aluminum	
			Length	Weight	Volume	Finish	Code	€
			1000 mm	0,70 Kg	0,0013 m³	 White	282909	48
			1000 mm	0,70 Kg	0,0013 m³	 Black	257877	48
			2000 mm	1,40 Kg	0,0018 m³	 White	282916	96
			2000 mm	1,40 Kg	0,0018 m³	 Black	266121	96

	IP20	L-JOINT	Optional				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,21 Kg	0,0010 m³	On-Off	White	282848	96
			0,21 Kg	0,0010 m³	On-Off	Black	257990	96
			0,21 Kg	0,0010 m³	1-10V / DALI	White	286266	100
			0,21 Kg	0,0010 m³	1-10V / DALI	Black	286259	100

	IP20	LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,04 Kg	0,0001 m³	On-Off 1-10V / DALI	White	285993	40
			0,04 Kg	0,0001 m³		Black	283104	40


	IP20	POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 210W				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,20 Kg	0,0008 m³	On-Off	 White	282862	37
			0,20 Kg	0,0008 m³	On-Off	 Black	265896	37
			0,20 Kg	0,0008 m³	1-10V / DALI	 White	286303	50
			0,20 Kg	0,0008 m³	1-10V / DALI	 Black	286297	50

		END CAP NO HOLE				Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€
			Yes	26 x 11 x 27 mm	White	282688	6
			Yes	26 x 11 x 27 mm	Black	267241	6

		END CAP WITH HOLE				Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€
			Yes	26 x 11 x 27 mm	White	282671	6
			Yes	26 x 11 x 27 mm	Black	267258	6


	CEILING CUP WITH SUSPENSION KIT				Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	Yes - 1 Kit x power source max 210W	2000 mm	● White	282749	55	
		2000 mm	● Black	276328	55	
	SUSPENSION KIT				Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	Yes - 1 Kit x 900 mm	2000 mm	● White	282756	17	
		2000 mm	● Black	259376	17	
	BLIND COVER				Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	No	1000 x 17 x 18 mm	● White	344768	10	
	No	1000 x 17 x 18 mm	● Black	344751	10	
	BLIND COVER L-JOINT				Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	No	95 x 18 x 17 mm	● Black	337104	10	


ego high
assembly plans

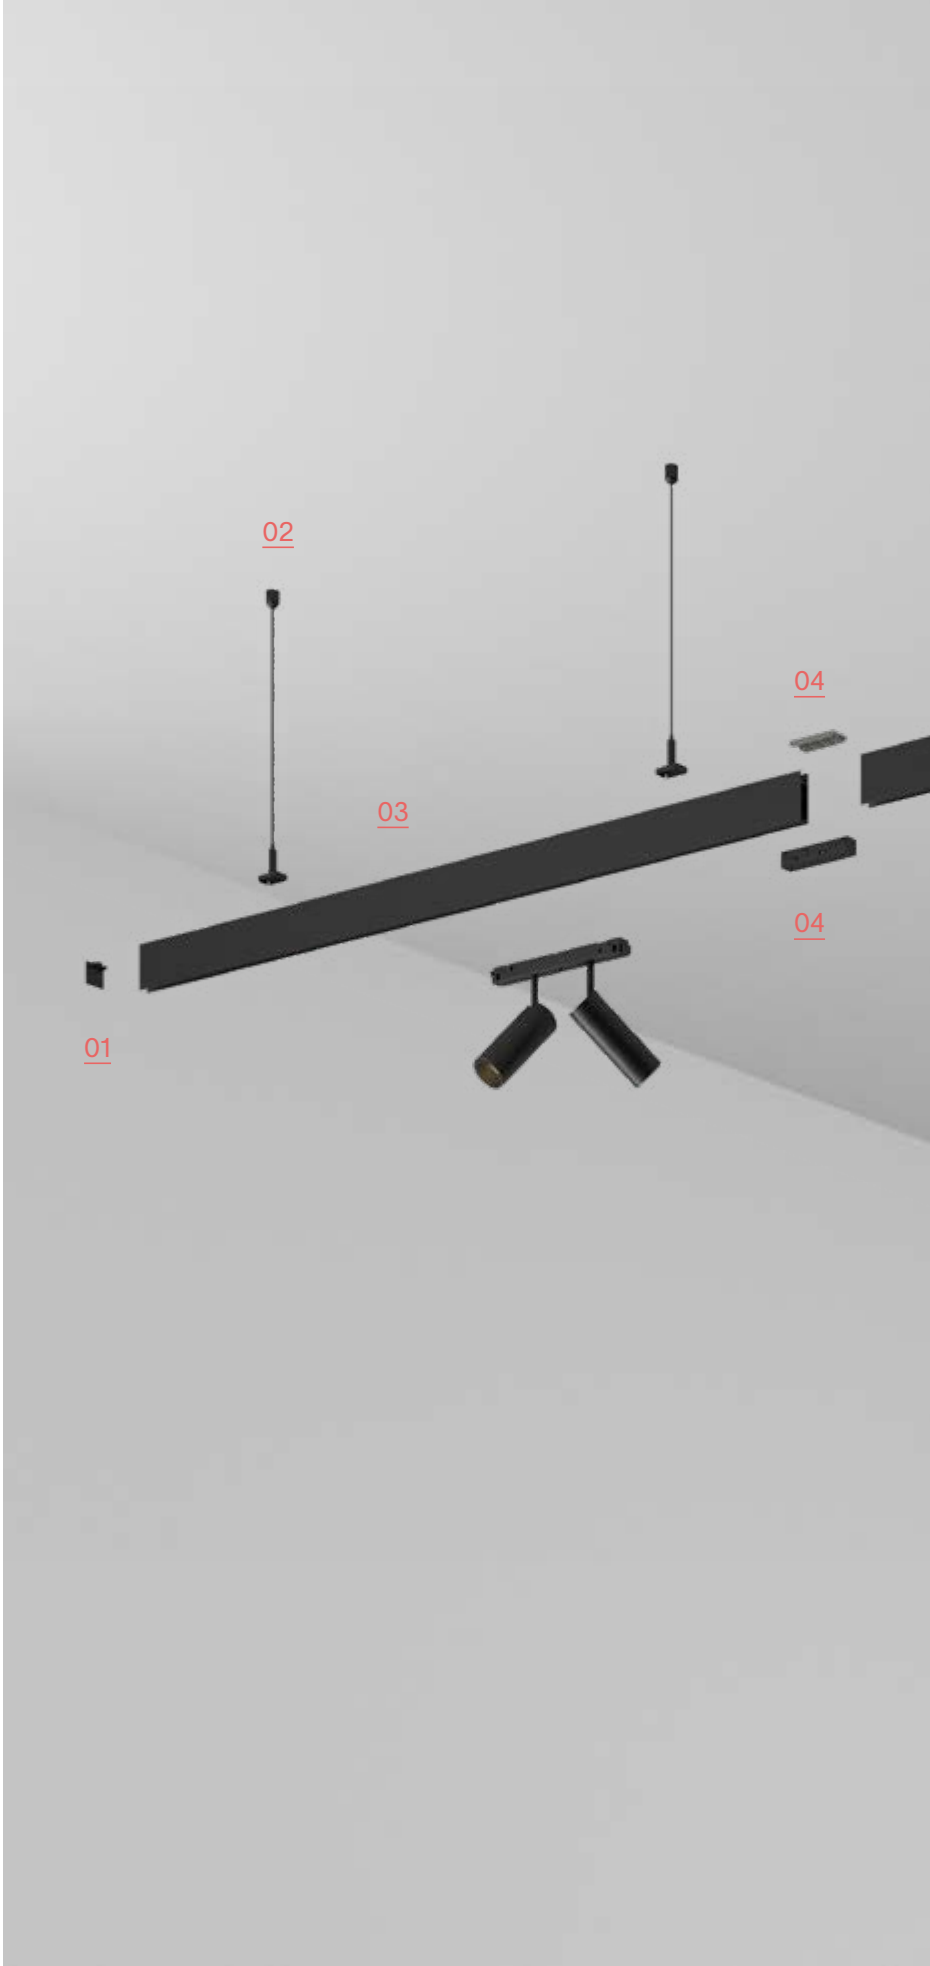



- 01 End cap no hole
- 02 Suspension Kit
- 03 Track High 2000 mm
- 04 Linear joint
- 05 L-joint
- 06 Power supply connector
- 07 Ceiling cup with suspension Kit
- 08 Driver + Driver box
- 09 End cap no hole




 	IP20	TRACK	No mounting Kit required, direct ceiling installation Maximum length per power source: 25 meters				Material: Aluminum	
			Length	Weight	Volume	Finish	Code	€
			1000 mm	0,90 Kg	0,0085 m³	White	282886	60
			1000 mm	0,90 Kg	0,0085 m³	Black	258027	60
			2000 mm	1,80 Kg	0,0096 m³	White	282893	120
			2000 mm	1,80 Kg	0,0096 m³	Black	266145	120

 	IP20	L-JOINT	Optional				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,26 Kg	0,0013 m³	On-Off	White	282824	92
			0,26 Kg	0,0013 m³	On-Off	Black	258140	92
			0,26 Kg	0,0013 m³	1-10V / DALI	White	286228	100
			0,26 Kg	0,0013 m³	1-10V / DALI	Black	286211	100





 	IP20	LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,04 Kg	0,0001 m³	On-Off	White	285993	40
			0,04 Kg	0,0001 m³	On-Off	Black	283104	40
			0,04 Kg	0,0001 m³	1-10V / DALI	White	285993	40
			0,04 Kg	0,0001 m³	1-10V / DALI	Black	283104	40

  Cable length 2000 mm	IP20	POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 210W				Material: Aluminum	
			Weight	Volume	Control	Finish	Code	€
			0,20 Kg	0,0008 m³	On-Off	White	282862	37
			0,20 Kg	0,0008 m³	On-Off	Black	265896	37
			0,20 Kg	0,0008 m³	1-10V / DALI	White	286303	50
			0,20 Kg	0,0008 m³	1-10V / DALI	Black	286297	50

		END CAP NO HOLE			Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	Yes	26 x 11 x 52 mm	● White	282664	6	
	Yes	26 x 11 x 52 mm	● Black	267227	6	
		END CAP WITH HOLE			Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	Yes	26 x 11 x 52 mm	● White	282657	6	
	Yes	26 x 11 x 52 mm	● Black	267234	6	
		CEILING CUP WITH SUSPENSION KIT			Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	Yes - 1 Kit x power source max 210W	2000 mm	● White	282749	55	
		2000 mm	● Black	276328	55	
		SUSPENSION KIT			Material: Aluminum	
	Required	Measure (L x H x W)	Finish	Code	€	
	Yes - 1 Kit x 900 mm	2000 mm	● White	282756	17	
		2000 mm	● Black	259376	17	
		BLIND COVER			Material: Aluminum	
	Required	Measure (L x H x W)	Finitura	Codice	€	
	Yes	1000 x 5 x 24 mm	● White	282770	17	
	Yes	1000 x 5 x 24 mm	● Black	258256	17	

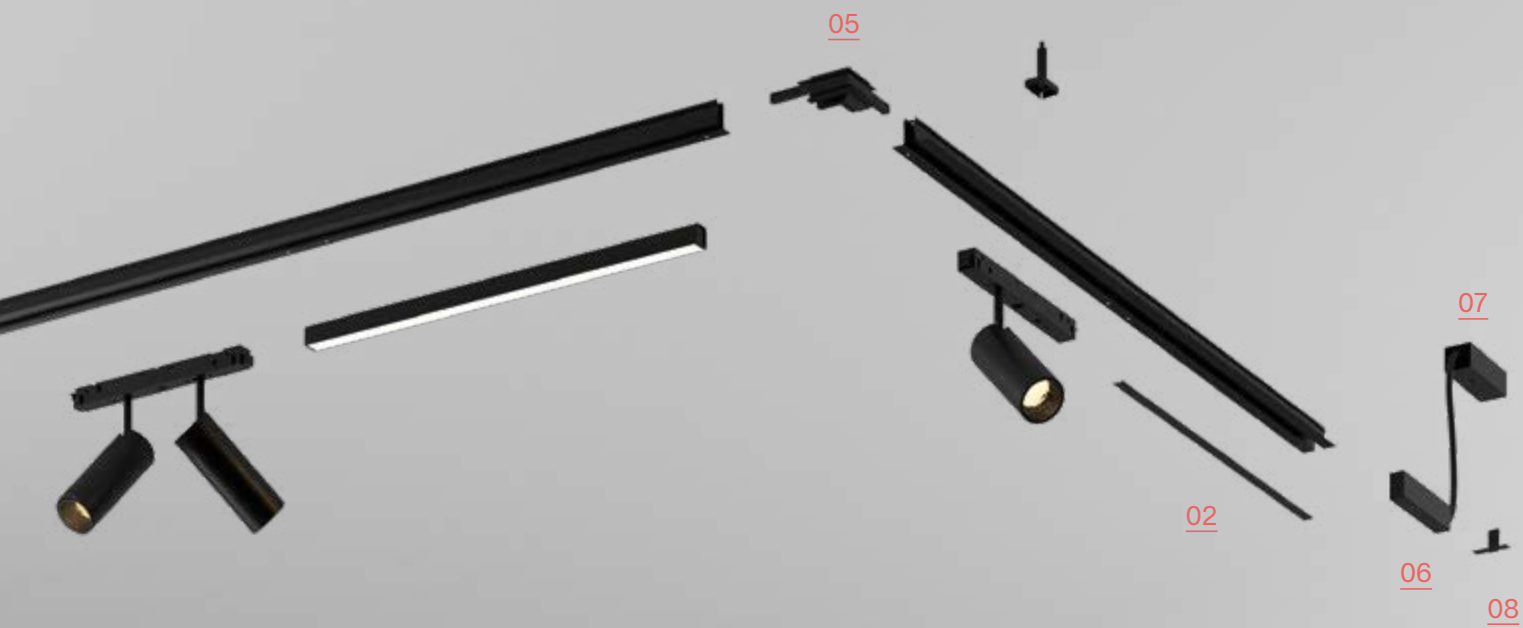

ego recessed

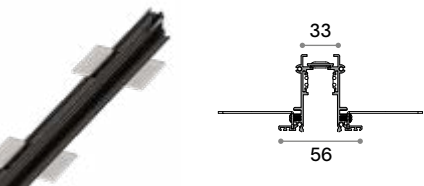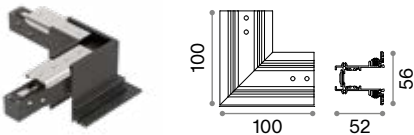IP20		TRACK	Kit for assembly profile included Maximum length per power source: 25 meters				Material: Aluminum	
	Length		Weight	Volume	Finish	Code	€	
	1000 mm		1,52 Kg	0,0085 m³	White	282923	75	
	1000 mm		1,52 Kg	0,0085 m³	Black	258171	75	
	2000 mm		2,94 Kg	0,0020 m³	White	282930	150	
	2000 mm		2,94 Kg	0,0020 m³	Black	266183	150	
IP20		L-JOINT	Optional				Material: Aluminum	
	Weight		Volume	Control	Finish	Code	€	
	0,32 Kg		0,0013 m³	On-Off	White	282787	91	
	0,32 Kg		0,0013 m³	On-Off	Black	258232	91	
	0,32 Kg		0,0013 m³	1-10V / DALI	White	286204	125	
	0,32 Kg		0,0013 m³	1-10V / DALI	Black	286167	125	
IP20		LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
	Weight		Volume	Control	Finish	Code	€	
	0,04 Kg		0,0002 m³	On-Off	White	286006	40	
	0,04 Kg		0,0002 m³	1-10V / DALI	Black	283111	40	
IP20		POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 210W				Material: Aluminum	
	Weight		Volume	Control	Finish	Code	€	
	0,20 Kg		0,0008 m³	On-Off	White	282862	37	
	0,20 Kg		0,0008 m³	On-Off	Black	265896	37	
	0,20 Kg		0,0008 m³	1-10V / DALI	White	286303	50	
	0,20 Kg		0,0008 m³	1-10V / DALI	Black	286297	50	





ego recessed

END CAP NO HOLE		Material: Aluminum			
	Required	Measure (L x H x W)	Finish	Code	€
	Yes	36 x 4 x 52 mm	White	282701	6
	Yes	36 x 4 x 52 mm	Black	267203	6
END CAP WITH HOLE		Material: Aluminum			
	Required	Measure (L x H x W)	Finish	Code	€
	Yes	36 x 4 x 52 mm	White	282695	6
	Yes	36 x 4 x 52 mm	Black	267210	6
BLIND COVER		Material: Aluminum			
	Required	Measure (L x H x W)	Finish	Code	€
	No	1000 x 5 x 24 mm	White	282770	17
	No	1000 x 5 x 24 mm	Black	258256	17
INSTALLATION TOOL		Material: Aluminum			
	Required	Measure (L x H x W)	Finish	Code	€
	No		Black	292922	32






Left: blind cover
Right: installation tool

ego recessed easy




 IP20		TRACK			No mounting Kit required, direct ceiling installation Maximum length per power source: 25 meters		Material: Aluminum		
 				Length	Weight	Volume	Finish	Code	€
				1000 mm	1,16 Kg	0,0088 m³	 White	320489	65
				1000 mm	1,16 Kg	0,0088 m³	 Black	320472	65
				2000 mm	2,40 Kg	0,0088 m³	 White	320502	130
				2000 mm	2,40 Kg	0,0088 m³	 Black	320496	130
 IP20		L-JOINT			Optional			Material: Aluminum	
 				Weight	Volume	Control	Finish	Code	€
				0,30 Kg	0,0013 m³	On-Off	 White	320748	117
				0,30 Kg	0,0013 m³	On-Off	 Black	320731	117
				0,30 Kg	0,0013 m³	1-10V / DALI	 White	320724	135
				0,30 Kg	0,0013 m³	1-10V / DALI	 Black	320717	135
 IP20		LINEAR JOINT			Required - 1 Kit x linear connection			Material: Aluminum	
 				Weight	Volume	Control	Finish	Code	€
				0,04 Kg	0,0002 m³	On-Off	 White	286006	40
				0,04 Kg	0,0002 m³	1-10V / DALI	 Black	283111	40
 IP20		POWER SUPPLY CONNECTOR			Required - 1 Kit x power source max 210W			Material: Aluminum	
  Cable length 2000 mm				Weight	Volume	Control	Finish	Code	€
				0,20 Kg	0,0008 m³	On-Off	 White	282862	37
				0,20 Kg	0,0008 m³	On-Off	 Black	265896	37
				0,20 Kg	0,0008 m³	1-10V / DALI	 White	286303	50
				0,20 Kg	0,0008 m³	1-10V / DALI	 Black	286297	50
		END CAP NO HOLE						Material: Aluminum	
				Required	Measure (L x H x W)	Finish	Code	€	
				Yes	83 x 52 x 30 mm	 White	320564	6	
				Yes	83 x 52 x 30 mm	 Black	320557	6	
		END CAP WITH HOLE						Material: Aluminum	
				Required	Measure (L x H x W)	Finish	Code	€	
				Yes	83 x 52 x 30 mm	 White	320588	6	
				Yes	83 x 52 x 30 mm	 Black	320571	6	
		BLIND COVER						Material: Aluminum	
				Required	Measure (L x H x W)	Finish	Code	€	
				No	1000 x 5 x 24 mm	 White	282770	17	
				No	1000 x 5 x 24 mm	 Black	258256	17	

ego recessed easy assembly plans

- 01 End cap no hole
- 02 Blind cover
- 03 Track 1000 mm
- 04 Linear joint
- 05 L-joint
- 06 Connettore di alimentazione
- 07 Driver
- 08 End cap with hole

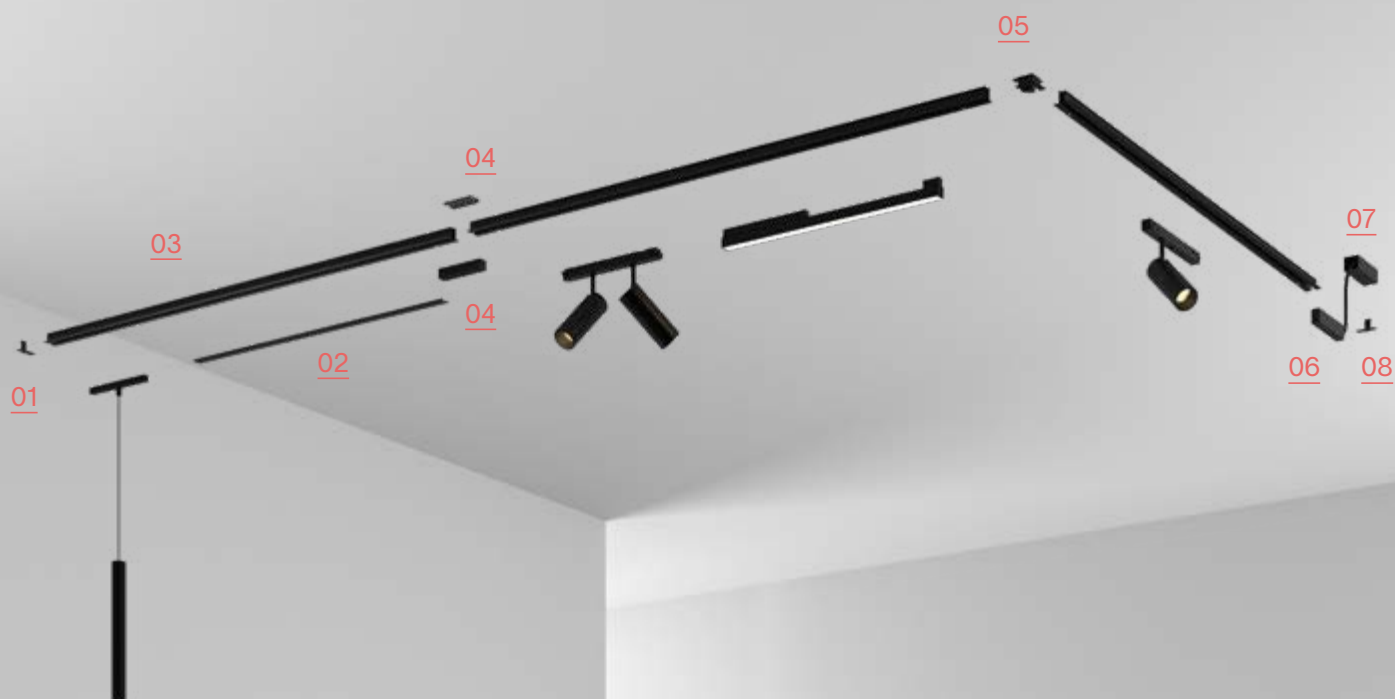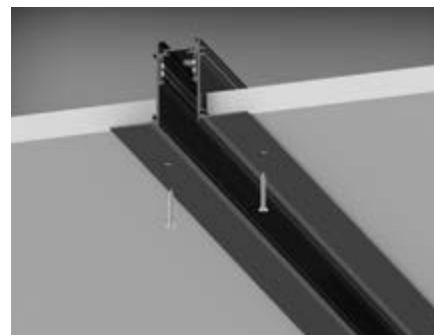
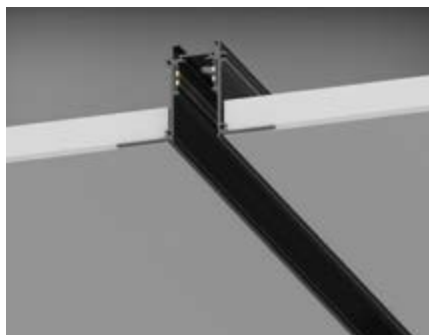


ego recessed trim


 IP20		TRACK	Kit for assembly profile included Maximum length per power source: 25 meters				Material: Aluminum	
 			Length	Weight	Volume	Finish	Code	€
			1000 mm	1,13 Kg	0,0020 m³	 White	320441	86
			1000 mm	1,13 Kg	0,0020 m³	 Black	320434	86
			2000 mm	2,25 Kg	0,0040 m³	 White	320465	172
			2000 mm	2,25 Kg	0,0040 m³	 Black	320458	172
 IP20		L-JOINT	Optional				Material: Aluminum	
 			Weight	Volume	Control	Finish	Code	€
			0,30 Kg	0,0013 m³	On-Off	 White	320625	128
			0,30 Kg	0,0013 m³	On-Off	 Black	320618	128
			0,30 Kg	0,0013 m³	1-10V / DALI	 White	320601	147
			0,30 Kg	0,0013 m³	1-10V / DALI	 Black	320595	147
 IP20		LINEAR JOINT	Required - 1 Kit x linear connection				Material: Aluminum	
 			Weight	Volume	Control	Finish	Code	€
			0,04 Kg	0,0002 m³	On-Off	 White	286006	40
			0,04 Kg	0,0002 m³	1-10V / DALI	 Black	283111	40
 IP20		POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 210W				Material: Aluminum	
  Cable length 2000 mm			Weight	Volume	Control	Finish	Code	€
			0,20 Kg	0,0008 m³	On-Off	 White	282862	37
			0,20 Kg	0,0008 m³	On-Off	 Black	265896	37
			0,20 Kg	0,0008 m³	1-10V / DALI	 White	286303	50
			0,20 Kg	0,0008 m³	1-10V / DALI	 Black	286297	50
		END CAP NO HOLE					Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€	
			Yes	38 x 52 x 17 mm	 White	320526	6	
			Yes	38 x 52 x 17 mm	 Black	320519	6	
		END CAP WITH HOLE					Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€	
			Yes	38 x 52 x 17 mm	 White	320540	6	
			Yes	38 x 52 x 17 mm	 Black	320533	6	
		BLIND COVER					Material: Aluminum	
			Required	Measure (L x H x W)	Finish	Code	€	
			No	1000 x 5 x 24 mm	 White	282770	17	
			No	1000 x 5 x 24 mm	 Black	258256	17	

ego recessed trim assembly plans


- 01 End cap no hole
- 02 Blind cover
- 03 Track 1000 mm
- 04 Linear joint
- 05 L-joint
- 06 Power supply connector
- 07 Driver
- 08 End cap with hole

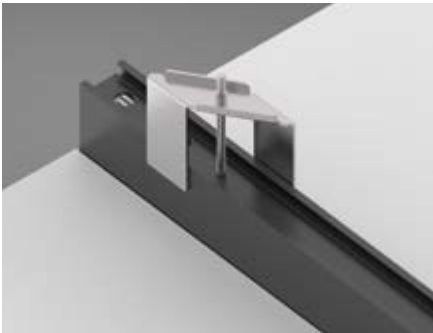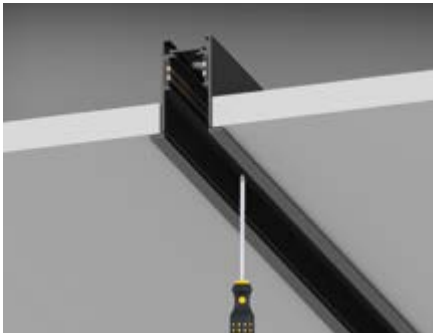

ego bi-emission
assembly plans

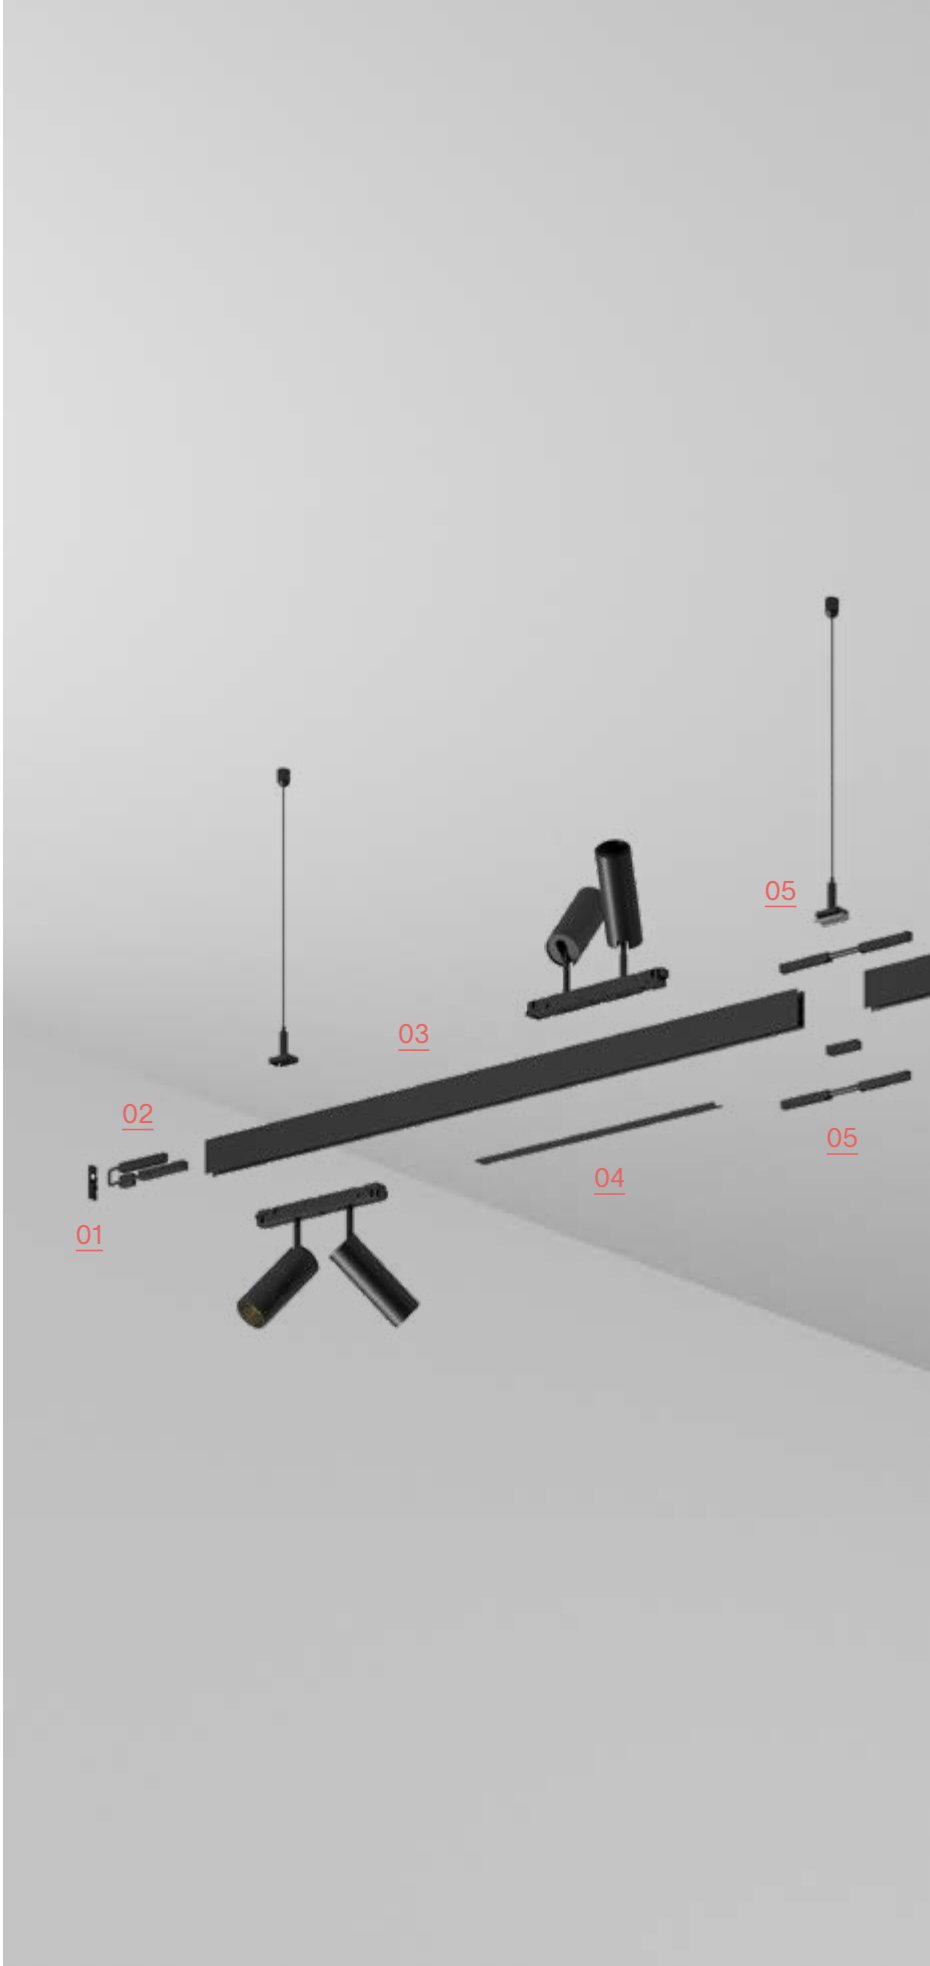



- 01 End cap no hole
- 02 Up/down electrical connector
- 03 Track Bi-emission 1000 mm
- 04 Blind cover
- 05 Linear joint with suspension Kit
- 06 Track Bi-emission 2000 mm
- 07 Suspension Kit
- 08 Ceiling cup with suspension Kit
- 09 Power supply connector
- 10 End cap with hole

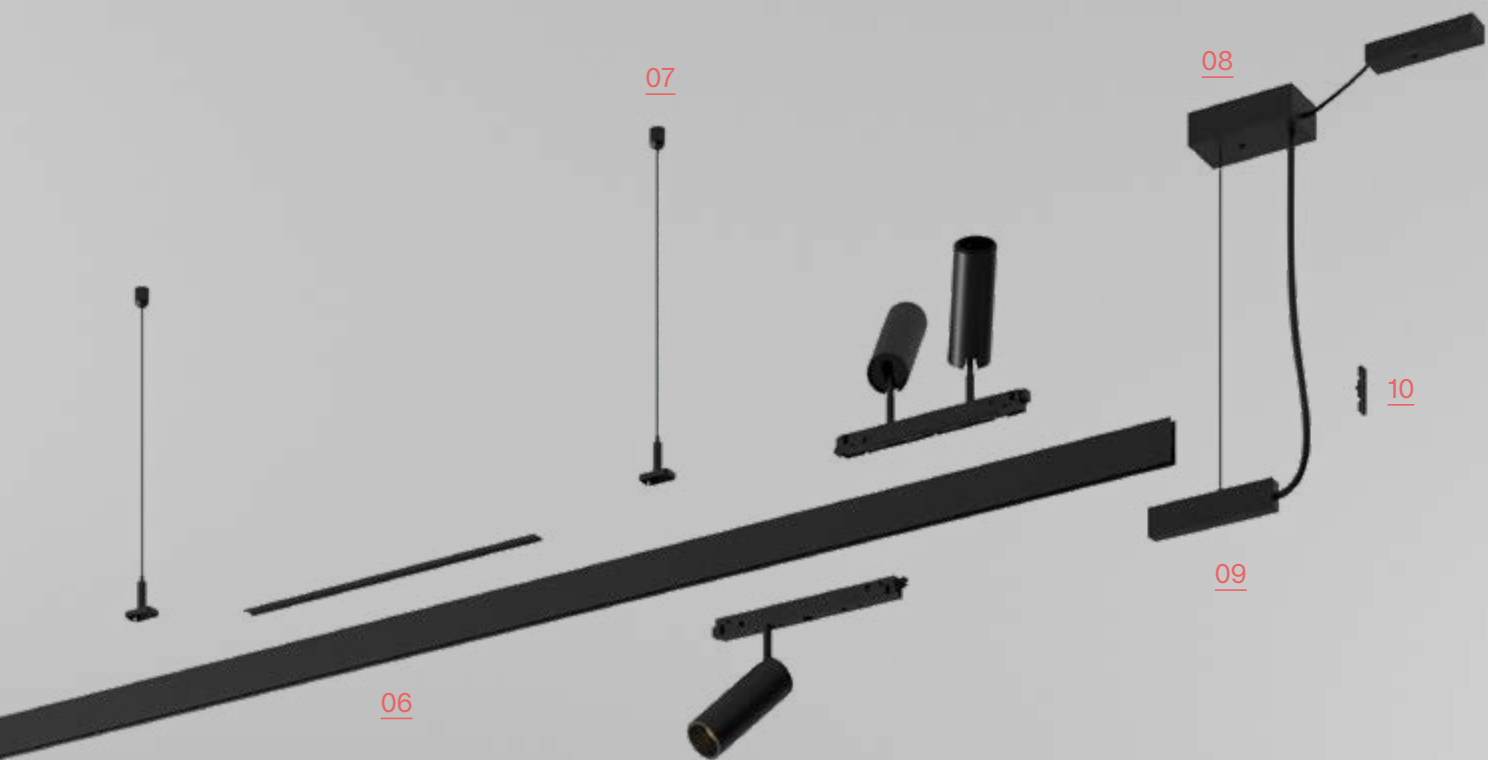

ego bi-emission

	IP20 TRACK	Maximum length per power source: 13 meters				Material: Aluminum	
		Length	Weight	Volume	Finish	Code	€
		1000 mm	1,40 Kg	0,0026 m³	● Black	322513	148
		2000 mm	2,90 Kg	0,0045 m³	● Black	340647	296

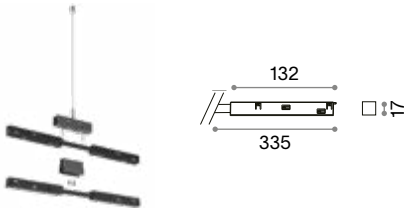	IP20 LINEAR JOINT WITH SUSPENSION KIT	Required - 1 Kit x linear connection				Material: Aluminum	
		Weight	Volume	Control	Finish	Code	€
		0,271 Kg	0,0012 m³	On-Off	● Black	339863	219
		0,271 Kg	0,0012 m³	1-10V / DALI	● Black	351346	262

	IP20 UP/DOWN ELECTRICAL CONNECTOR	Required - 1 Kit x linear connection				Material: Aluminum	
		Weight	Volume	Control	Finish	Code	€
		0,100 Kg	0,0002 m³	On-Off	● Black	322810	71
		0,100 Kg	0,0002 m³	1-10V / DALI	● Black	342757	80

	IP20 POWER SUPPLY CONNECTOR	Required - 1 Kit x power source max 210W				Material: Aluminum	
		Weight	Volume	Control	Finish	Code	€
		0,20 Kg	0,0008 m³	On-Off	● White	282862	37
		0,20 Kg	0,0008 m³	On-Off	● Black	265896	37
		0,20 Kg	0,0008 m³	1-10V / DALI	● White	286303	50
		0,20 Kg	0,0008 m³	1-10V / DALI	● Black	286297	50

Cable length 2000 mm

ego bi-emission

END CAP NO HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 90 x 2 mm	● Black	322841	7

END CAP WITH HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 90 x 2 mm	● Black	322858	7

CEILING CUP WITH SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x power source max max 210W	2100 mm	● Black	322476	59

SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x 900 mm	2085 mm	● Black	322490	37

BLIND COVER

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 5 x 24 mm	● Black	258256	17



ego drivers

	DRIVER MEANWELL ON/OFF	Required					
		Power	Output	Measure (L x H x W)	Driver Box	Code	€
		75 W	48 Vdc	171x37x62 mm	255x55x75 mm	223155	143
		96 W	48 Vdc	220x37x68 mm	330x60x80 mm	223162	189
		150 W	48 Vdc	228x37x68 mm	330x60x80 mm	223179	209
		240 W	48 Vdc	244x39x68 mm	330x60x80 mm	224275	235

	DRIVER BOX	Optional	Material: Metal																				
		<table><tr><th>Measure (L x H x W)</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>255x55x75 mm</td><td> White</td><td>302379</td><td>25</td></tr><tr><td>255x55x75 mm</td><td> Black</td><td>302362</td><td>25</td></tr><tr><td>330x60x80 mm</td><td> White</td><td>302355</td><td>30</td></tr><tr><td>330x60x80 mm</td><td> Black</td><td>302348</td><td>30</td></tr></table>	Measure (L x H x W)	Finish	Code	€	255x55x75 mm	 White	302379	25	255x55x75 mm	 Black	302362	25	330x60x80 mm	 White	302355	30	330x60x80 mm	 Black	302348	30	
Measure (L x H x W)	Finish	Code	€																				
255x55x75 mm	 White	302379	25																				
255x55x75 mm	 Black	302362	25																				
330x60x80 mm	 White	302355	30																				
330x60x80 mm	 Black	302348	30																				

	ON-OFF DRIVER ON TRACK	Required - Cable length 2000 mm It replaces Driver + Power supply connector*				
		Power	Output	Measure (L x H x W)	Code	€
		100 W	48 Vdc	297x20x16 mm	296302	92
		150 W	48 Vdc	268x43x16 mm	325750	97
		250 W	48 Vdc	268x43x16 mm	325767	113

*Codes 325750 and 325767 suggested use with HIGH and RECESSED versions.





FLUO



fluo wide



IP20

MacAdam: SDCM 3 | LED SMD SAMSUNG | 50.000 h life



light beam: WIDE



Material: Aluminum



Power	Installation	Beam	CRI
27W	Suspension	105°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3250 lm	3000 K	White	192437	330
On-Off	3250 lm	3000 K	Black	191997	330
On-Off	3450 lm	4000 K	White	192482	330
On-Off	3450 lm	4000 K	Black	192505	330

DIMMABLE DRIVER* Optional


Power	Output	Measure (L x H x W)	Code	€
27 W	500 mA	280x21x30 mm	216287	160



2,890 Kg/0,0206 m³

Cable length
2150 mm

Photometry



m	lx	dm
1	813	3,00
2	203	6,00
3	90	9,00
4	51	12,00
5	33	15,00

Driver

TRIDONIC ON-OFF included



Power	Installation	Beam	CRI
36W	Suspension	105°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	4900 lm	3000 K	White	192550	425
On-Off	4900 lm	3000 K	Black	192567	425
On-Off	5200 lm	4000 K	White	192604	425
On-Off	5200 lm	4000 K	Black	192628	425

DIMMABLE DRIVER* Optional


Power	Output	Measure (L x H x W)	Code	€
38 W	700 mA	280x21x30 mm	216270	160



4,420 Kg/0,0403 m³

Cable length
2150 mm

Photometry



m	lx	dm
1	1087	3,00
2	272	6,00
3	121	9,00
4	68	12,00
5	43	15,00

Driver


TRIDONIC ON-OFF included

MOUNTING KIT


Required - page 155

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.

Linear system of lamps with extruded aluminum, 50 mm wide and 80 mm high body. Modules available in two lengths: 1200 mm and 1800 mm, which can be assembled according to the desired arrangement. The system is available in two different arrangements: the WIDE diffusing module and the BI-EMISSION module with component for indirect lighting. The system is available in white and black colors and it is possible to install it in different ways: single or continuous line for ceiling installation; suspended or flush-mounted in plasterboard ceilings. Suitable for locations where professional lighting with minimal design is required, such as COMMERCIAL and RETAIL.

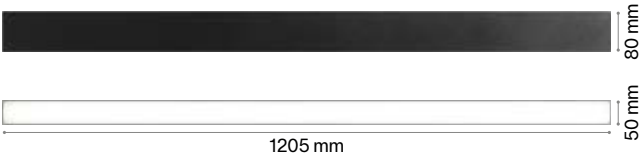

Fluo Wide 1800

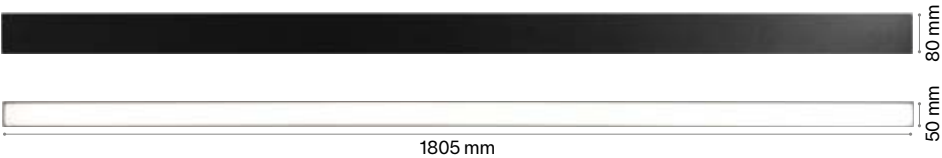

The single final cup is 2.5 mm width.







fluo bi-emission

IDEAL LUX

TECHNICAL

FLUO



IP20

MacAdam: SDCM 3 | 50.000 h life



light beam: BI-EMISSION WIDE



Material: Aluminum



2,890 Kg/0,0183 m³

Cable length
2150 mm

Power	Installation	Beam	CRI	Source
27W	Suspension	105°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	3250 lm	3000 K	White	192666	425
On-Off	3250 lm	3000 K	Black	192710	425
On-Off	3450 lm	4000 K	White	192741	425
On-Off	3450 lm	4000 K	Black	192758	425

UP LIGHT INFO

Power	Installation	Beam	CRI
13W	Suspension	105°	≥90

Lumen	CCT
2250 lm	3000 K
2450 lm	4000 K

DIMMABLE DRIVERS KIT*

Control	Code	€
DALI/Push	270876	260

Photometry



m	lx	cm
1	771	3,00
2	193	6,00
3	86	9,00
4	48	12,00
5	31	15,00

Driver


TRIDONIC ON-OFF included

MOUNTING KIT

Required - page 155

*Separate switching on of direct and indirect output (available only for on-off versions). Control of the direct and indirect output in synchrony (versions with Push dimming). The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.

fluo bi-emission

 IP20	MacAdam: SDCM 3 50.000 h life	 light beam: BI-EMISSION WIDE	 Material: Aluminum			
	Power		Installation	Beam	CRI	Source
	36W		Suspension	105°	≥90	LED SMD SAMSUNG
	Control		Lumen	CCT	Finish	Code €
	On-Off		4900 lm	3000 K	● White	192703 580
	On-Off		4900 lm	3000 K	● Black	192697 580
	On-Off		5200 lm	4000 K	● White	192673 580
	On-Off		5200 lm	4000 K	● Black	192642 580
	UP LIGHT INFO					
	Power		Installation	Beam	CRI	
	18W		Suspension	105°	≥90	
	Lumen		CCT			
	3350 lm		3000 K			
	3650 lm		4000 K			
	DIMMABLE DRIVERS KIT*					
	Control		Code		€	
	DALI/Push		270937		260	
	Photometry					
						
	Driver					
	TRIDONIC ON-OFF included					
Cable length		4,420 Kg/0,0275 m³				
2150 mm		MOUNTING KIT				
		Required - page 155				


*Separate switching on of direct and indirect output (available only for on-off versions). Control of the direct and indirect output in synchrony (versions with Push dimming). The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.



The single final cup is 2.5 mm width.



fluo assembly plans

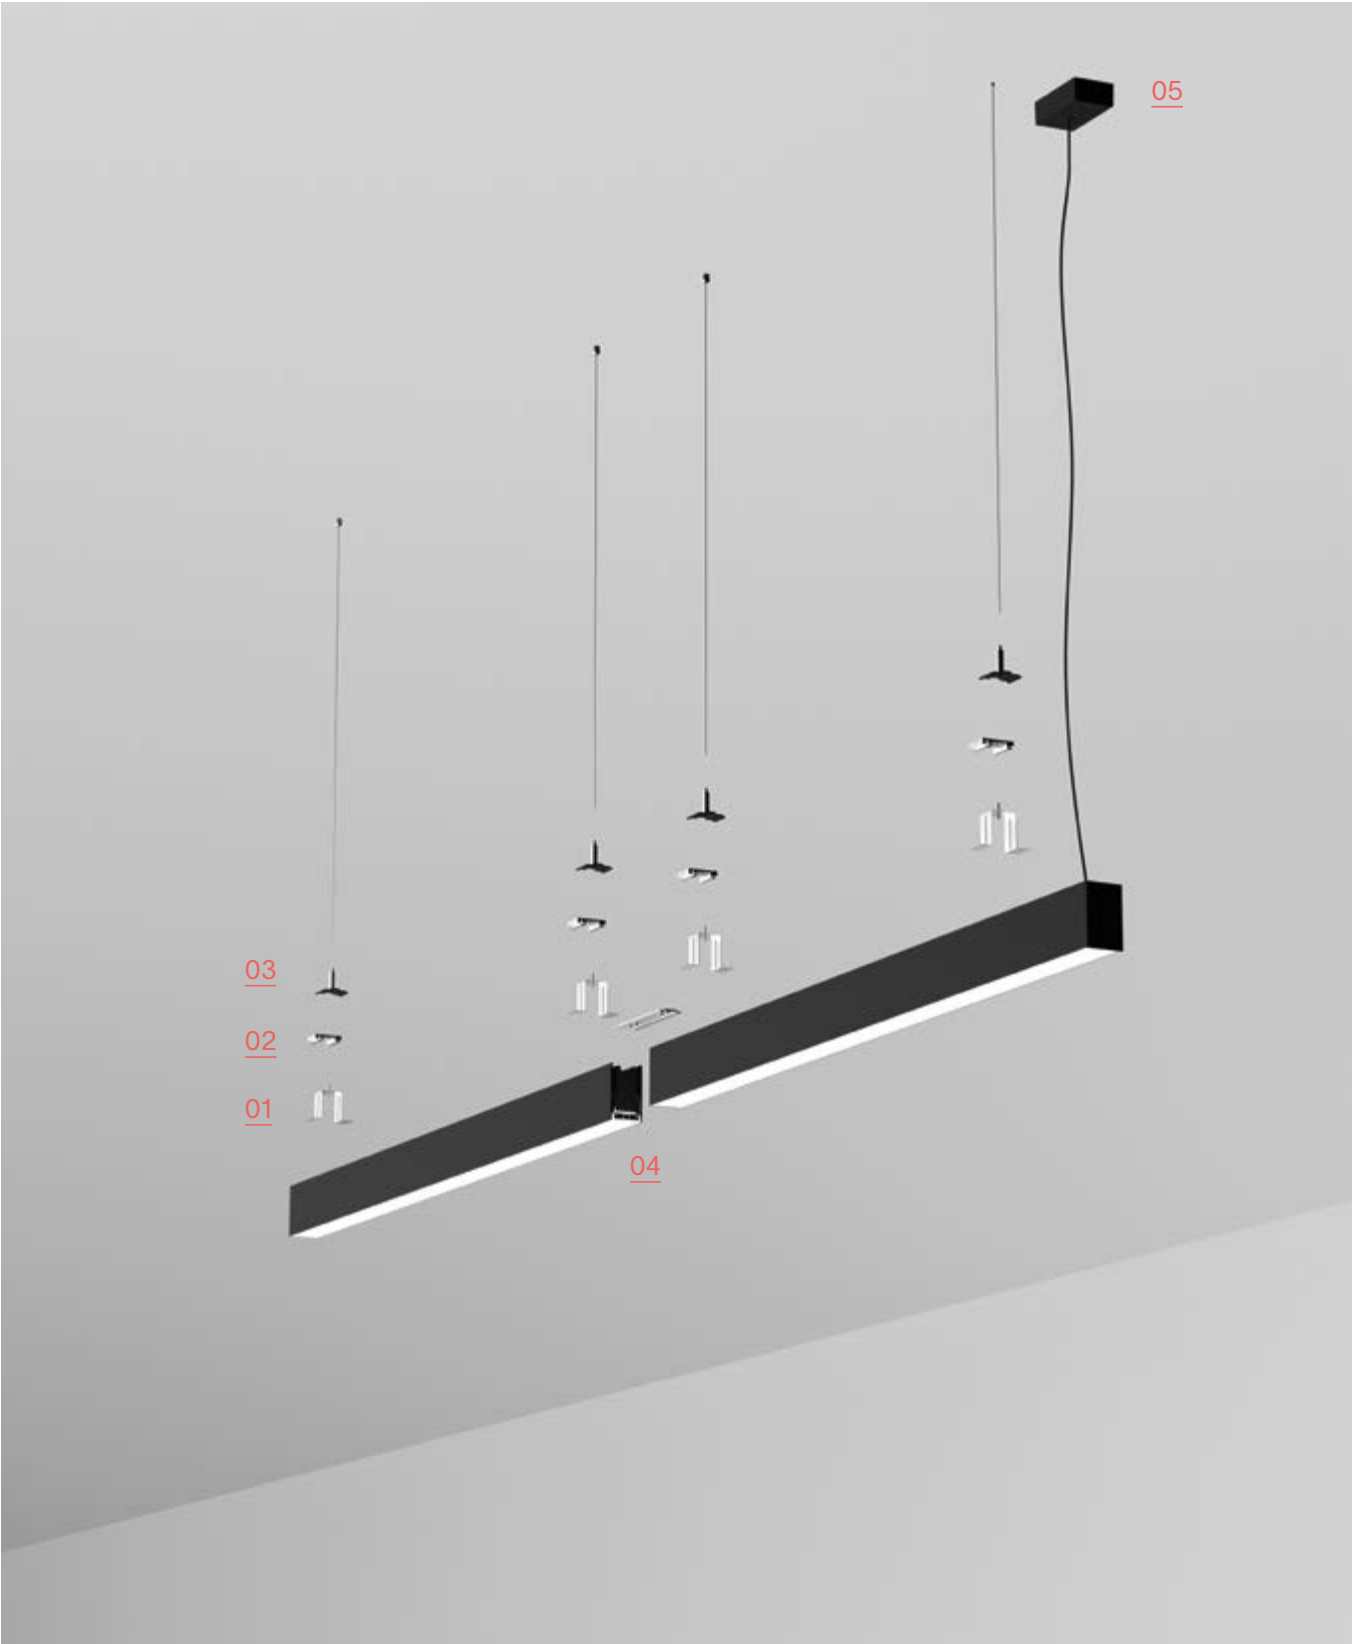

fluo - kit montaggio

IDEAL LUX

TECHNICAL

	CEILING CUP WITH SUSPENSION KIT	Required - Yes - 1 Kit x power source				
	Cavi	Cables Length	Finish	Code	€	
	1	2000 mm	● White	277929	32	
	1	2000 mm	● Black	277912	32	
	1	5000 mm	● White	276342	43	
	1	5000 mm	● Black	276335	43	
	SUSPENSION KIT	Required - Yes - 1Kit x 600 mm				
	Cavi	Cables Length		Code	€	
	1	2000 mm		220826	13	
	1	5000 mm		243665	20	
	RECESSED MOUNTING KIT	Required - Yes - 1Kit x 600 mm				
				Code	€	
				191188	25	
	CEILING MOUNTING KIT	Required - Yes - 1Kit x 600 mm				
				Code	€	
				191171	25	
	MECHANICAL JOINT	Required - Yes - 1 Kit x connection Maximum length per power source: 30 meters				
				Code	€	
				191508	12	

FLUO

- 01 Kit montaggio incasso
- 02 Rcessed mounting Kit
- 03 Ceiling cup with suspension Kit
- 04 Mechanical joint
- 05 Suspension Kit

STEEL



Family of linear luminaires with extruded aluminium body, powder coated in white or black finish.

Steel Slim Accent



Steel Slim Wide



steel d09 - mono-emission



IP20



MacAdam: SDCM 3 | 50.000 h life




UGR UGR<19



light beam: WIDE

Material: Aluminum




1,700 Kg/0,0131 m³

Cable length
2000 mm

Power	Installation		Beam	CRI	Source
24W	Suspension		90°	≥90	LED SMD WIDE
Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	3000 K	● White	367019	150
On-Off	2700 lm	3000 K	● Black	368818	150

Photometry



m	lx	am
1	809	1,00
2	202	2,10
3	90	3,10
4	51	4,20
5	32	5,20

Driver

ON/OFF included



IP20



MacAdam: SDCM 3 | 50.000 h life




UGR UGR<16



light beam: ACCENT

Material: Aluminum



1,700 Kg/0,0131 m³

Cable length
2000 mm

Power	Installation	Beam	CRI	Source
24W	Suspension	50°	≥90	LED SMD ACCENT

Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	3000 K	● White	368795	150
On-Off	2700 lm	3000 K	● Black	368771	150

Photometry



m	lx	am
1	990	0,76
2	247	1,50
3	110	2,30
4	62	3,10
5	40	3,80

Driver


ON/OFF included





steel d09 - bi-emission


 IP20	 MacAdam: SDCM 3 50.000 h life	 UGR<19	 light beam: BI-EMISSION WIDE	Material: Aluminum
--	---	--	--	--------------------

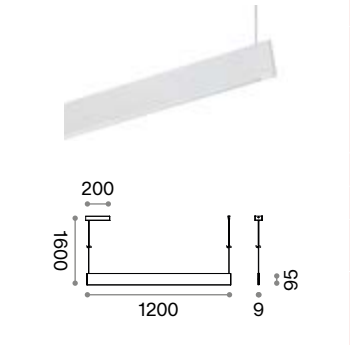

	Cable length
1,800 Kg/0,0144 m³	1500 mm

Power	Installation	Beam	CRI	Source	
35W	Suspension	110°	≥90	LED SMD SAMSUNG WIDE	
Control	Lumen	CCT	Finish	Code	€
On-Off	2750 lm	3000 K	White	348407	160
On-Off	2750 lm	3000 K	Black	348384	160

Photometry




m	lx	øm
1	616	2,80
2	154	5,60
3	68	8,50
4	39	11,00
5	25	14,00

Driver
ON/OFF included

UP-LIGHT INFO		
Beam	Lumen	CCT
110°	1400 lm	3000 K


 IP20	 MacAdam: SDCM 3 50.000 h life	 UGR<16	 light beam: BI-EMISSION ACCENT	Material: Aluminum
--	---	--	--	--------------------

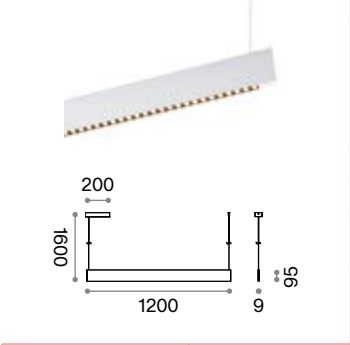

	Cable length
1,800 Kg/0,0144 m³	1500 mm

Power	Installation	Beam	CRI	Source	
35W	Suspension	70°	≥90	LED SMD SAMSUNG ACCENT	
Control	Lumen	CCT	Finish	Code	€
On-Off	3450 lm	3000 K	● White	348414	160
On-Off	3450 lm	3000 K	● Black	348391	160

Photometry



m	lx	øm
1	937	1,50
2	234	3,10
3	104	4,60
4	59	6,20
5	37	7,70

Driver
ON/OFF included

UP-LIGHT INFO		
Beam	Lumen	CCT
110°	650 lm	3000 K



steel d11 - bi-emission

IP20

PRO

MacAdam: SDCM 3 | 50.000 h life

UGR

UGR<19

light beam: BI-EMISSION WIDE

Material: Aluminum

200

2000

1200

11

09

1,800 Kg/0,0094 m³

Cable length
2000 mm

Power	Installation	Beam	CRI	Source
36W	Suspension	110°	≥90	LED SMD SAMSUNG WIDE

Control	Lumen	CCT	Finish	Code	€
On-Off	2750 lm	3000 K	White	336206	140
On-Off	2750 lm	3000 K	Black	336190	140

Photometry

90°

60°

30°

90°

60°

30°

m	lx	øm
1	775	0,93
2	194	1,90
3	86	2,80
4	48	3,70
5	31	4,60

Driver

ON/OFF included

UP-LIGHT INFO		
Beam	Lumen	CCT
110°	1400 lm	3000 K

IP20

PRO

MacAdam: SDCM 3 | 50.000 h life

UGR

UGR<16

light beam: BI-EMISSION ACCENT

Material: Aluminum

200

2000

1200

11

09

1,800 Kg/0,0094 m³

Cable length
2000 mm

Power	Installation	Beam	CRI	Source
36W	Suspension	68°	≥90	LED SMD SAMSUNG WIDE

Control	Lumen	CCT	Finish	Code	€
On-Off	3450 lm	3000 K	White	336183	140
On-Off	3450 lm	3000 K	Black	336176	140

Photometry

90°

60°

30°

90°

60°

30°

m	lx	øm
1	1091	0,76
2	273	1,50
3	121	2,30
4	68	3,10
5	44	3,80

Driver

ON/OFF included

UP-LIGHT INFO		
Beam	Lumen	CCT
71°	650 lm	3000 K

Steel Slim Accent

Steel Slim Wide

IDEAL LUX
TECHNICAL

STEEL

161

steel d20 - mono-emission



IP20



MacAdam: SDCM 3 | 50.000 h life




UGR<19



light beam: WIDE

Material: Aluminum



Power

29W

Installation

Beam

104°

CRI

≥90

Source

LED SMD WIDE

Control	Lumen	CCT	Finish	Code	€
1-10V	4500 lm	3000 K	White	369006	200
1-10V	4500 lm	3000 K	Black	367590	200
1-10V	4800 lm	4000 K	White	369044	200
1-10V	4800 lm	4000 K	Black	369020	200

Photometry



m	lx	ømm
1	949	2,40
2	237	4,80
3	105	7,10
4	59	9,50
5	38	12,00

Driver

1-10V included



1,750 Kg/0,0122 m³

Cable length

2000 mm



IP20



MacAdam: SDCM 3 | 50.000 h life




UGR<16



light beam: ACCENT

Material: Aluminum



Power

30W

Installation

Beam

44°

CRI

≥90

Source

LED SMD ACCENT

Control	Lumen	CCT	Finish	Code	€
1-10V	4500 lm	3000 K	White	368955	200
1-10V	4500 lm	3000 K	Black	368931	200
1-10V	4800 lm	4000 K	White	368986	200
1-10V	4800 lm	4000 K	Black	368979	200

Photometry



m	lx	ømm
1	6533	0,75
2	1633	1,50
3	726	2,30
4	408	3,00
5	261	3,80

Driver

1-10V included





1,900 Kg/0,0122 m³

Cable length

2000 mm

steel d20 - mono-emission

 IP20		L-JOINT		Optional - Up-light not included		 light beam: WIDE		Material: Aluminum	
 				Power	Installation	Beam	CRI		
				5,5W	Accessory	104°	≥90		
				Control	Lumen	CCT	Finish	Code	€
				1-10V	560 lm	3000 K	 White	241999	47
				1-10V	560 lm	3000 K	 Black	242002	47
				1-10V	600 lm	4000 K	 White	268149	47
				1-10V	600 lm	4000 K	 Black	268118	47
 0,260 Kg/0,0028 m³									

 IP20		BLIND L-JOINT		Optional - Up-light not included				Material: Aluminum	
 						Installation	Finish	Code	€
						Accessory	 White	370286	47
						Accessory	 Black	370200	47
 0,300 Kg/0,0021 m³									

		LINEAR JOINT				Material: Aluminum				
						Required	Code	€		
						Yes - 1 Kit x connection	241982	6		

steel d20 - bi-emission



IP20



MacAdam: SDCM 3 | 50.000 h life




UGR<19



light beam: BI-EMISSION WIDE

Material: Aluminum



Power

32W

Installation

Suspension

Beam

104°

CRI

≥90

Source

LED SMD WIDE

Control	Lumen	CCT	Finish	Code	€
1-10V	4650 lm	3000 K	White	241968	225
1-10V	4650 lm	3000 K	Black	241975	225
1-10V	5000 lm	4000 K	White	268231	225
1-10V	5000 lm	4000 K	Black	268217	225

Photometry



m	lx	øm
1	495	2,60
2	124	5,10
3	55	7,70
4	31	10,00
5	20	13,00

Driver

1-10V included



2,550 Kg/0,0123 m³

Cable length

2000 mm

UP-LIGHT INFO	
Lumen	CCT
2250 lm	3000 K
2400 lm	4000 K



IP20



MacAdam: SDCM 3 | 50.000 h life




UGR<16



light beam: BI-EMISSION ACCENT

Material: Aluminum



Power

38W

Installation

Suspension

Beam

44°

CRI

≥90

Source

LED SMD ACCENT

Control	Lumen	CCT	Finish	Code	€
1-10V	5700 lm	3000 K	White	368832	225
1-10V	5700 lm	3000 K	Black	367606	225
1-10V	6000 lm	4000 K	White	368863	225
1-10V	6000 lm	4000 K	Black	368849	225

Photometry



m	lx	øm
1	572	2,56
2	143	5,12
3	64	7,68
4	36	10,24
5	23	12,80

Driver

1-10V included



1,850 Kg/0,0122 m³






Cable length

2000 mm

UP-LIGHT INFO	
Lumen	CCT
2200 lm	3000 K
2300 lm	4000 K

164

steel d20 - bi-emission

 IP20		L-JOINT		Optional - Up-light not included		 light beam: BI-EMISSION WIDE		Material: Aluminum	
 				Power	Installation	Beam	CRI		
				5,5W	Accessory	104°	≥90		
				Control	Lumen	CCT	Finish	Code	€
				1-10V	560 lm	3000 K	 White	241999	47
 				1-10V	560 lm	3000 K	 Black	242002	47
				1-10V	600 lm	4000 K	 White	268149	47
				1-10V	600 lm	4000 K	 Black	268118	47
 0,260 Kg/0,0028 m³									
 IP20		BLIND L-JOINT		Optional - Up-light not included				Material: Aluminum	
 				Installation	Finish	Code	€		
				Accessory	 White	370286	47		
				Accessory	 Black	370200	47		
 0,300 Kg/0,0021 m³									
		LINEAR JOINT						Material: Aluminum	
				Required				Code	€
				Yes - 1 Kit x connection				241982	6





steel d35 - bi-emission


 IP20

 MacAdam: SDCM 3 | 50.000 h life

 UGR<19

 light beam: BI-EMISSION WIDE

Material: Aluminum



Power

36W

Installation

Suspension/Ceiling

Beam

70°

CRI

≥90

Source

LED SMD SAMSUNG WIDE

Control

On-Off

Lumen

4200 lm

CCT

3000 K

Finish

White

Code

267128

€

300

Control

On-Off

Lumen

4200 lm

CCT

3000 K

Finish

Black

Code

270197

€

300

Control

On-Off

Lumen

4500 lm

CCT

4000 K

Finish

White

Code

270203

€

300

Control

On-Off

Lumen

4500 lm

CCT

4000 K

Finish

Black

Code

267135

€

300



m	lx	øm
1	1112	1,30
2	278	2,70
3	124	4,00
4	70	5,30
5	44	6,70

Driver

ON/OFF included

 1,990 Kg/0,0111 m³

Cable length

1800 mm


 IP20

 MacAdam: SDCM 3 | 50.000 h life

 UGR<16

 light beam: BI-EMISSION ACCENT

Material: Aluminum



Power

36W

Installation

Suspension/Ceiling

Beam

60°

CRI

≥90

Control

On-Off

Lumen

3600 lm

CCT

3000 K

Finish

White

Code

270180

€

300

Control

On-Off

Lumen

3600 lm

CCT

3000 K

Finish

Black

Code

267142

€

300

Control

On-Off

Lumen

3700 lm

CCT

4000 K

Finish

White

Code

267159

€

300

Control

On-Off

Lumen

3700 lm

CCT

4000 K

Finish

Black

Code

270173

€

300



m	lx	øm
1	1925	1,20
2	481	2,40
3	214	3,60
4	120	4,80
5	77	6,10

Driver

ON/OFF included

 1,980 Kg/0,0111 m³

Cable length

1800 mm



UP-LIGHT INFO (inclusa)

Beam	Lumen	CCT
110°	750 lm	3000 K
110°	800 lm	4000 K


168


steel - accessory

CEILING CUP WITH SUSPENSION KIT	Required - 1 Kit x power source			Material: Aluminum	
	N° Cavi	Cables Length	Finish	Code	€
	1	2000 mm	● White	276311	35
	1	2000 mm	● Black	276304	35
SUSPENSION KIT	Required - 1 Kit x 500 mm			Material: Aluminum	
	N° Cavi	Cables Length	Code		€
	1	2000 mm	271750		13
CEILING MOUNTING KIT	Required - 1 Kit x 1000 mm			Material: Aluminum	
	N° Cavi	Code		€	
	1	270210		31	
LINEAR JOINT	Required - 1 Kit x connection			Material: Aluminum	
	N° Cavi	Code		€	
	1	271712		7	

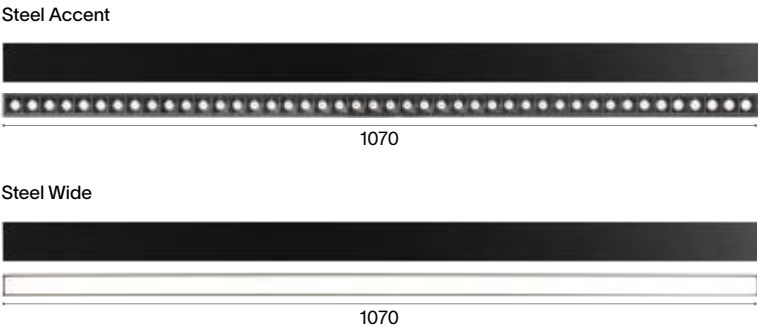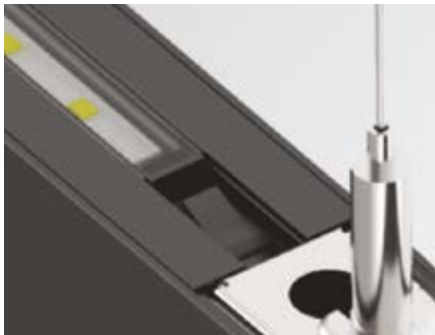

steel ap

 IP20		 LED SMD 50.000 h life		 light beam: BI-EMISSION WIDE		Material: Aluminum									
 				Power		Installation		CRI							
				32W		Wall		≥90							
				Control		Lumen		CCT		Finish		Code		€	
				1-10V		4650 lm		3000 K		 White		233840		210	
				1-10V		4650 lm		3000 K		 Black		242019		210	
1-10V		5000 lm		4000 K		 White		268095		210					
1-10V		5000 lm		4000 K		 Black		268071		210					
 1,250 Kg/0,0140 m³		Cable length 1800 mm													

 IP20		 LED SMD 50.000 h life		 light beam: MONO-EMISSION WIDE		Material: Aluminum									
 				Power		Installation		CRI							
				29W		Wall		≥90							
				Control		Lumen		CCT		Finish		Code		€	
				1-10V		4500 lm		3000 K		 White		368887		195	
				1-10V		4500 lm		3000 K		 Black		367576		195	
1-10V		4800 lm		4000 K		 White		368917		195					
1-10V		4800 lm		4000 K		 Black		368894		195					
 1,600 Kg/0,0114 m³		Cable length 1800 mm													

Linear aluminum lamp with direct and indirect light for wall installation. White or black finish available. Integrated LED, starting binning ≤ 3-Step MacAdam; available with 3000 K and 4000 K color temperature; CRI ≥ 90. Dimmable power supply 1-10V integrated as standard.



OFFICE




IP20

UGR <19

LED SMD | 50.000 h life

Light beam: WIDE

Material: Aluminum

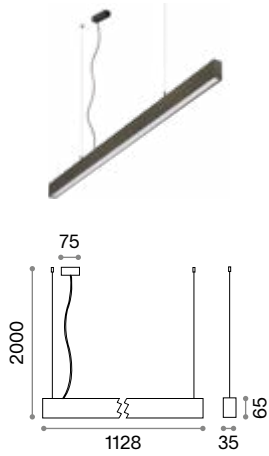


Cable length
1,800 Kg/0,0039 m³ 2000 mm

Power	Installation	Beam	CRI
30W	Suspension	68°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3900 lm	3000 K	White	369129	180
On-Off	3900 lm	3000 K	Black	369112	180
On-Off	4100 lm	4000 K	White	369150	180
On-Off	4100 lm	4000 K	Black	369136	180

Photometry




m	lx	ø m
1	1812	1,40
2	453	2,90
3	201	4,30
4	113	5,70
5	72	7,20

Driver

ON/OFF included

LINEAR JOINT - Required - 1 Kit x linear connection



0,120 Kg/0,0001 m³

Required	Control	Finish	Code	€
Si	On-Off	White	373522	5
SI	On-Off	Black	373515	5


IP20

UGR <16

LED SMD | 50.000 h life

Light beam: ACCENT

Material: Aluminum

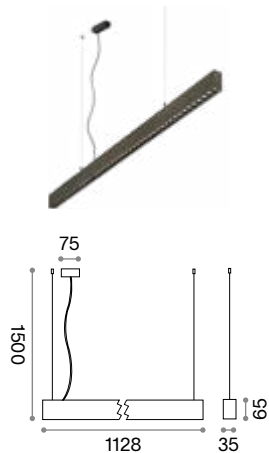


Cable length
1,820 Kg/0,0041 m³ 1500 mm

Power	Installation	Beam	CRI
30W	Suspension	37°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3350 lm	3000 K	White	271194	180
On-Off	3350 lm	3000 K	Black	271187	180
On-Off	3700 lm	4000 K	White	271217	180
On-Off	3700 lm	4000 K	Black	271200	180

Photometry



m	lx	ø m
1	6008	0,72
2	1502	1,40
3	668	2,20
4	376	2,90
5	240	3,60

Driver

ON/OFF included

Not compatible with: 373522, 373515

STRIP LED






strip led




SMD 2835 180 LED/m

MacAdam: SDCM 3 | 50.000 h life

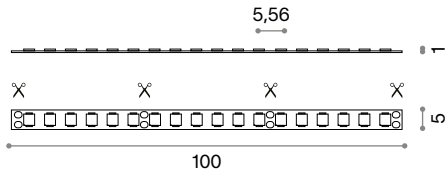

Power	Beam	Vdc	CRI		
8 W/m	120°	24	≥90		
IP	Lumen	CCT	Measure	Code	€
IP20	670 lm/m	2700 K	5 x 5000mm	345772	50
IP20	700 lm/m	3000 K	5 x 5000mm	345789	50
IP20	750 lm/m	4000 K	5 x 5000mm	345796	50
Power	Beam	CRI			
15 W/m	120°	≥90			
IP	Lumen	CCT	Measure	Code	€
IP20	1290 lm/m	2700 K	5 x 5000mm	345765	65
IP20	1340 lm/m	3000 K	5 x 5000mm	332239	65
IP20	1380 lm/m	4000 K	5 x 5000mm	332246	65

strip led

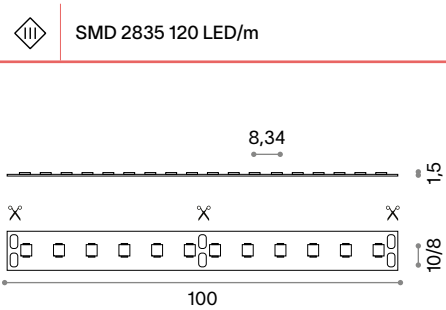

SMD 2835 120 LED/m

MacAdam: SDCM 3 | 50.000 h life


Power	Beam	Vdc	CRI		
5 W/m	120°	24	≥90		
IP	Lumen	CCT	Measure	Code	€
IP20	470 lm/m	2700 K	8 x 5000mm	346328	50
IP20	490 lm/m	3000 K	8 x 5000mm	346335	50
IP20	510 lm/m	4000 K	8 x 5000mm	346359	50
IP65	460 lm/m	3000 K	8 x 5000mm	346342	60
IP65	500 lm/m	4000 K	8 x 5000mm	346366	60
Power	Beam	Vdc	CRI		
10 W/m	120°	24	≥90		
IP	Lumen	CCT	Measure	Code	€
IP20	910 lm/m	2700 K	8 x 5000mm	346373	50
IP20	940 lm/m	3000 K	8 x 5000mm	346380	50
IP20	970 lm/m	4000 K	8 x 5000mm	346403	50
IP65	960 lm/m	3000 K	8 x 5000mm	346397	60
IP65	1040 lm/m	4000 K	8 x 5000mm	346410	60
Power	Beam	Vdc	CRI		
15 W/m	120°	24	≥90		
IP	Lumen	CCT	Measure	Code	€
IP20	1400 lm/m	2700 K	10 x 5000mm	272498	55
IP20	1450 lm/m	3000 K	10 x 5000mm	272481	55
IP20	1600 lm/m	4000 K	10 x 5000mm	272474	55
IP65	1400 lm/m	3000 K	10 x 5000mm	272504	75
IP65	1480 lm/m	4000 K	10 x 5000mm	287959	75

strip led



SMD 2835 240 LED/m

MacAdam: SDCM 3 | 50.000 h life

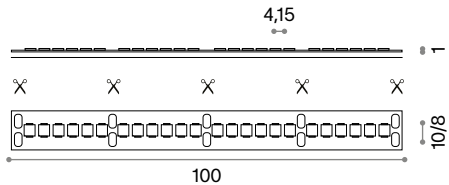

Power	Beam	Vdc	CRI
10 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	990 lm/m	2700 K	8 x 5000mm	346427	65
IP20	1000 lm/m	3000 K	8 x 5000mm	346434	65
IP20	1060 lm/m	4000 K	8 x 5000mm	346458	65
IP65	880 lm/m	3000 K	8 x 5000mm	346441	80
IP65	900 lm/m	4000 K	8 x 5000mm	346465	80

Power	Beam	Vdc	CRI
15 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	1330 lm/m	2700 K	8 x 5000mm	346472	65
IP20	1450 lm/m	3000 K	8 x 5000mm	346489	65
IP20	1510 lm/m	4000 K	8 x 5000mm	346502	65
IP65	1400 lm/m	3000 K	8 x 5000mm	346496	80
IP65	1460 lm/m	4000 K	8 x 5000mm	346519	80


Power	Beam	Vdc	CRI
20.5 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	2000 lm/m	2700 K	10 x 5000mm	272535	90
IP20	2050 lm/m	3000 K	10 x 5000mm	272528	90
IP20	2100 lm/m	4000 K	10 x 5000mm	272511	90
IP65	2000 lm/m	3000 K	10 x 5000mm	272542	105
IP65	2020 lm/m	4000 K	10 x 5000mm	287966	105



SMD 2835 180 LED/m


MacAdam: SDCM 3 | 50.000 h life

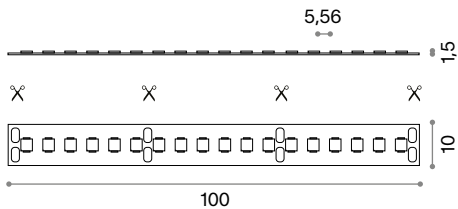

Power	Beam	Vdc	CRI
40 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	4350 lm/m	3000 K	10 x 3000mm	253886	145
IP20	4410 lm/m	4000 K	10 x 3000mm	253893	145

strip led

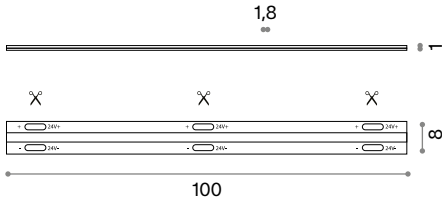	COB 180 LED/m		MacAdam: SDCM 3 50.000 h life			
	Power	Beam	Vdc	CRI		
	8 W/m	120°	24	≥90		
	IP	Lumen	CCT	Measure	Code	€
	IP20	760 lm/m	2700 K	8 x 5000mm	325934	60
	IP20	790 lm/m	3000 K	8 x 5000mm	325958	60
	IP20	820 lm/m	4000 K	8 x 5000mm	325972	60
	Power	Beam	Vdc	CRI		
	15 W/m	120°	24	≥90		
	IP	Lumen	CCT	Measure	Code	€
	IP20	1350 lm/m	2700 K	8 x 5000mm	325941	60
	IP20	1470 lm/m	3000 K	8 x 5000mm	325965	60
	IP20	1620 lm/m	4000 K	8 x 5000mm	325989	60

POWER SUPPLY CONNECTOR

	Required	Code	€
	No	292939	2

LINEAR JOINT

	Required	Code	€
	No	292953	2

DRIVER

Solo per installazione in interni						
	Class	Control	Power	Output	Measure (L x H x W)	Code €
		On-Off	30 W	24 Vdc	140 x 28 x 45 mm	124070 17
		On-Off	60 W	24 Vdc	186 x 33 x 50 mm	124087 26
		On-Off	150 W	24 Vdc	268 x 31 x 45 mm	124117 46
		1-10V/Push	36 W	24 Vdc	293 x 30 x 43 mm	244556 47
		1-10V	100 W	24 Vdc	210 x 34 x 67 mm	244570 65
		1-10V	150 W	24 Vdc	210 x 34 x 67 mm	244594 70
		DALI/Push	36 W	24 Vdc	175 x 30 x 44 mm	244549 57
		DALI/Push	80 W	24 Vdc	295 x 35 x 45 mm	244563 67
		DALI/Push	150 W	24 Vdc	273 x 37 x 57 mm	244587 90


DRIVER BOX

				Materiale: Metal	
	Measure (L x H x W)	Finish	Code	€	
	255x55x75 mm	White	302379	25	
	255x55x75 mm	Black	302362	25	
	330x60x80 mm	White	302355	30	
	330x60x80 mm	Black	302348	30	



TESI


Tesi is an invisible line that draws light with absolute precision. A flexible steel ribbon that drapes from wall to wall to accommodate LED strips, creating essential and refined indirect lighting.

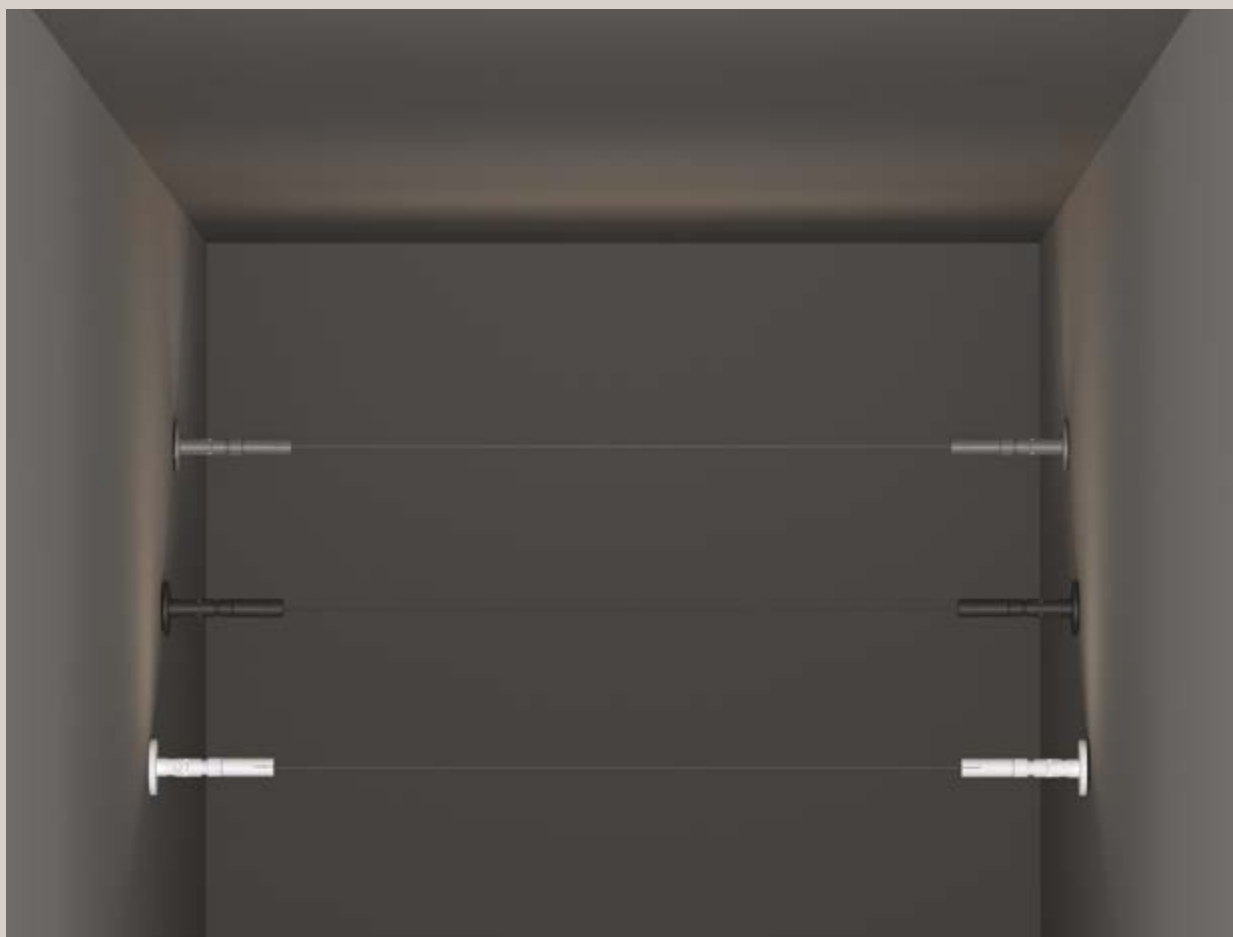

tesi 8mm


STRIP LED SUPPORT

Material: Aluminum



0,060 Kg/0,0032 m³

Length	Larghezza	Finish	Code	€
5000 mm	8 mm	Steel	344935	152
5000 mm	8 mm	White	344928	152
5000 mm	8 mm	Black	344911	152



0,080 Kg/0,0033 m³


Length	Larghezza	Finish	Code	€
10000 mm	8 mm	Steel	344904	168
10000 mm	8 mm	White	344898	168
10000 mm	8 mm	Black	344881	168

RECOMMENDED STRIP LED AND DRIVER



SMD 2835 180 LED/m

MacAdam: SDCM 3 | 50.000 h life

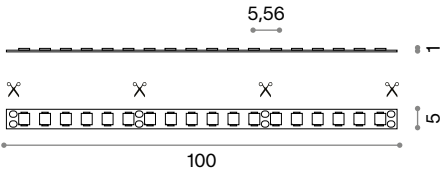

Power	Beam	Vdc	CRI
8 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	670 lm/m	2700 K	5 x 5000mm	345772	50
IP20	700 lm/m	3000 K	5 x 5000mm	345789	50
IP20	750 lm/m	4000 K	5 x 5000mm	345796	50

DRIVER ON/OFF

24 Vdc



- Class
- ☐
 - ☐
 - ☐

Control	Power	Measure (L x H x W)	Driver box	Code	€
On-Off	30 W	140 x 28 x 45 mm	255 x 55 x 75 mm	124070	17
On-Off	60 W	186 x 33 x 50 mm	255 x 55 x 75 mm	124087	26
On-Off	150 W	268 x 31 x 45 mm	330 x 60 x 80 mm	124117	46



Available in two widths (8 mm and 20 mm) and in sectionable lengths of up to 5 or 10 metres, it integrates discreetly thanks to its minimal, almost imperceptible section. The aluminium supports with locking system and the steel, white or black finishes make it ideal for environments with a strong architectural character, where every detail is designed not to disturb the aesthetic balance but to amplify its beauty.






tesi 20mm


STRIP LED SUPPORT

Material: Aluminum



0,350 Kg/0,0032 m³

Length	Larghezza	Finish	Code	€
5000 mm	20 mm	Steel	258300	160
5000 mm	20 mm	White	302256	160
5000 mm	20 mm	Black	302263	160



0,450 Kg/0,0032 m³

Length	Larghezza	Finish	Code	€
10000 mm	20 mm	Steel	302270	178
10000 mm	20 mm	White	302287	178
10000 mm	20 mm	Black	302294	178


tesi 20mm

RECOMMENDED STRIP LED AND DRIVER



SMD 2835 120 LED/m

MacAdam: SDCM 3 | 50.000 h life

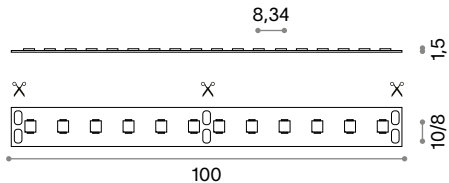

Power	Beam	Vdc	CRI
5 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	470 lm/m	2700 K	8 x 5000mm	346328	50
IP20	490 lm/m	3000 K	8 x 5000mm	346335	50
IP20	510 lm/m	4000 K	8 x 5000mm	346359	50
IP65	460 lm/m	3000 K	8 x 5000mm	346342	60
IP65	500 lm/m	4000 K	8 x 5000mm	346366	60

Power	Beam	Vdc	CRI
10 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	910 lm/m	2700 K	8 x 5000mm	346373	50
IP20	940 lm/m	3000 K	8 x 5000mm	346380	50
IP20	970 lm/m	4000 K	8 x 5000mm	346403	50
IP65	960 lm/m	3000 K	8 x 5000mm	346397	60
IP65	1040 lm/m	4000 K	8 x 5000mm	346410	60

Power	Beam	Vdc	CRI
15 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	1400 lm/m	2700 K	10 x 5000mm	272498	55
IP20	1450 lm/m	3000 K	10 x 5000mm	272481	55
IP20	1600 lm/m	4000 K	10 x 5000mm	272474	55
IP65	1400 lm/m	3000 K	10 x 5000mm	272504	75
IP65	1480 lm/m	4000 K	10 x 5000mm	287959	75

DRIVER ON/OFF

24 Vdc



Class




Control	Power	Measure (L x H x W)	Driver box	Code	€
On-Off	30 W	140 x 28 x 45 mm	255 x 55 x 75 mm	124070	17
On-Off	60 W	186 x 33 x 50 mm	255 x 55 x 75 mm	124087	26
On-Off	150 W	268 x 31 x 45 mm	330 x 60 x 80 mm	124117	46

SLOT



slot recessed trim

PROFILE 6 mm




Recommended Strip LED max 8 W/m

Material: Aluminum

Length	Weight	Volume	Finish	Code	€
2000 mm	0,72 Kg	0,0003 m ³	White	346212	9
3000 mm	1,23 Kg	0,0005 m ³	White	346229	13

PROFILE 12 mm




Recommended Strip LED max 15 W/m

Material: Aluminum

Length	Weight	Volume	Finish	Code	€
2000 mm	0,33 Kg	0,0007 m ³	White	203102	25
3000 mm	0,48 Kg	0,0010 m ³	White	204611	40

slot recessed trimless

PROFILE 11 mm




Recommended Strip LED max 8 W/m

Material: Aluminum

Length	Weight	Volume	Finish	Code	€
2000 mm	0,50 Kg	0,0021 m ³	White	346274	45
3000 mm	1,45 Kg	0,0021 m ³	White	346281	65

PROFILE 21 mm



Recommended Strip LED max 15 W/m

Material: Aluminum

Length	Weight	Volume	Finish	Code	€
2000 mm	0,60 Kg	0,0021 m ³	White	346762	60
3000 mm	0,88 Kg	0,0055 m ³	White	346779	80



trim 6 mm

trim 12 mm

trimless 11 mm

trimless 21 mm



346212
203102
Mounting Kit included



346762
346779

Extruded aluminium profile with anodised or powder-coated surface, available in white, black and aluminium finishes, with satin-finish PMMA diffuser. Bars are available in different sections and lengths in the RECESSED version for recessed installation in plasterboard ceilings and in the SURFACE version for wall or ceiling installation. The ANGULAR models are designed with an internal angle of inclination of the light source for optimal lighting inside light veils and wall chase. The linear profiles are available in lengths of 2000 and 3000 mm, can be assembled according to the desired design and can be cut to size. LED strips and drivers must be combined to complete the installation.

The accessories included with the profiles are not sold separately.

LINEAR JOINT



Required	Code	€
Yes - 1 Kit x connection	223766	6

L-JOINT




Required	Code	€
Yes - 1 Kit x connection	223759	6

WALL-CEILING JOINT



Required	Code	€
Yes - 1 Kit x connection	223742	6

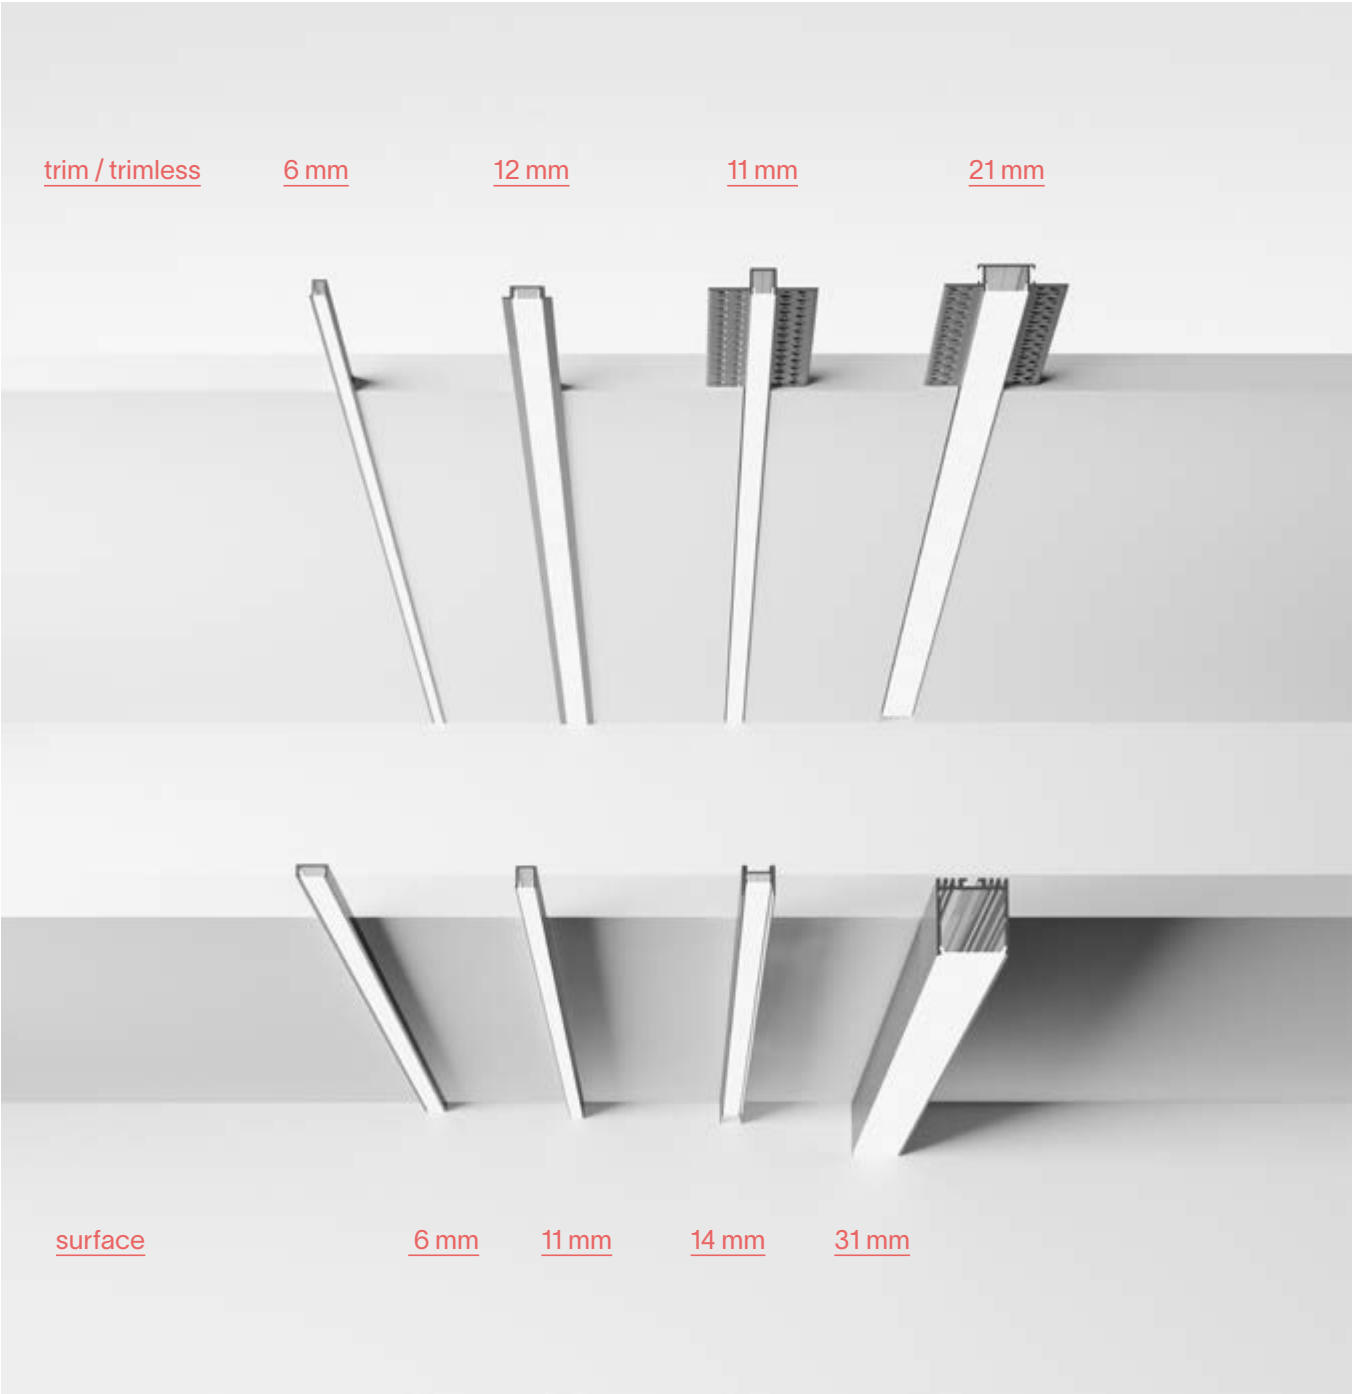

Mounting Kit included



307145



270517

slot surface

PROFILE 6 mm



Recommended Strip LED max 8 W/m

Length	Weight	Volume	Finish	Code	€
2000 mm	0,16 Kg	0,0003 m³	White	346243	8
2000 mm	0,16 Kg	0,0003 m³	Black	346236	8
3000 mm	0,40 Kg	0,0002 m³	White	346267	12
3000 mm	0,40 Kg	0,0002 m³	Black	346250	12


PROFILE 11 mm



Recommended Strip LED max 15 W/m

Length	Weight	Volume	Finish	Code	€
2000 mm	0,22 Kg	0,0022 m³	White	203089	20
2000 mm	0,22 Kg	0,0022 m³	Alluminio	203072	20
3000 mm	0,42 Kg	0,0022 m³	White	204598	30
3000 mm	0,42 Kg	0,0022 m³	Alluminio	204581	30


PROFILE 14 mm

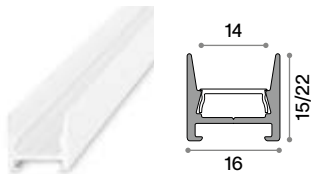

Recommended Strip LED max 15 W/m

Measure	Weight	Volume	Finish	Code	€
2000 x 15 mm	0,42 Kg	0,0008 m³	White	307145	25
2000 x 22 mm	0,51 Kg	0,0012 m³	White	307152	25

PROFILE 31 mm

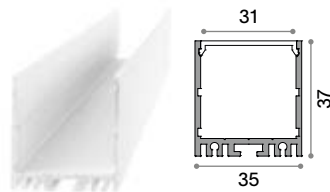

Recommended Strip LED max 40 W/m

Length	Weight	Volume	Finish	Code	€
2000 mm	1,41 Kg	0,0036 m³	White	270524	75
2000 mm	1,41 Kg	0,0036 m³	Black	270517	75
3000 mm	1,97Kg	0,0047 m³	White	270548	105
3000 mm	1,97 Kg	0,0047 m³	Black	270531	105

SUSPENSION KIT



Required	N Cavi	Cables Length	Code	€
No - 1 Kit x 2000 mm	2	3000 mm	270449	18

MECHANICAL JOINT



Required	Code	€
Yes - 1 Kit x connection	270463	6

slot angular recessed

PROFILE 17 mm		Recommended Strip LED max 15 W/m					
		Length	Weight	Volume	Finish	Code	€
		2000 mm	0,82 Kg	0,0042 m³	White	339788	65
		3000 mm	1,05 Kg	0,0052 m³	White	339795	90

LINEAR JOINT					
		Required		Code	€
		Yes - 1 Kit x connection		223766	6


L-JOINT					
		Required		Code	€
		Yes - 1 Kit x connection		223759	6

GIUNTO PARETE-CEILING					
		Required		Code	€
		Yes - 1 Kit x connection		223742	6

slot angular surface

PROFILE 10 mm		Recommended Strip LED max 15 W/m				
	Length	Weight	Volume	Finish	Code	€
	2000 mm	0,16 Kg	0,0003 m³	 Bianco	346298	20
	3000 mm	0,22 Kg	0,0004 m³	 Bianco	346304	30

PROFILE 16 mm		Recommended Strip LED max 15 W/m				
	Length	Weight	Volume	Finish	Code	€
	2000 mm	0,26 Kg	0,0002 m³	 White	203126	25
	3000 mm	0,41 Kg	0,0013 m³	 White	204635	40

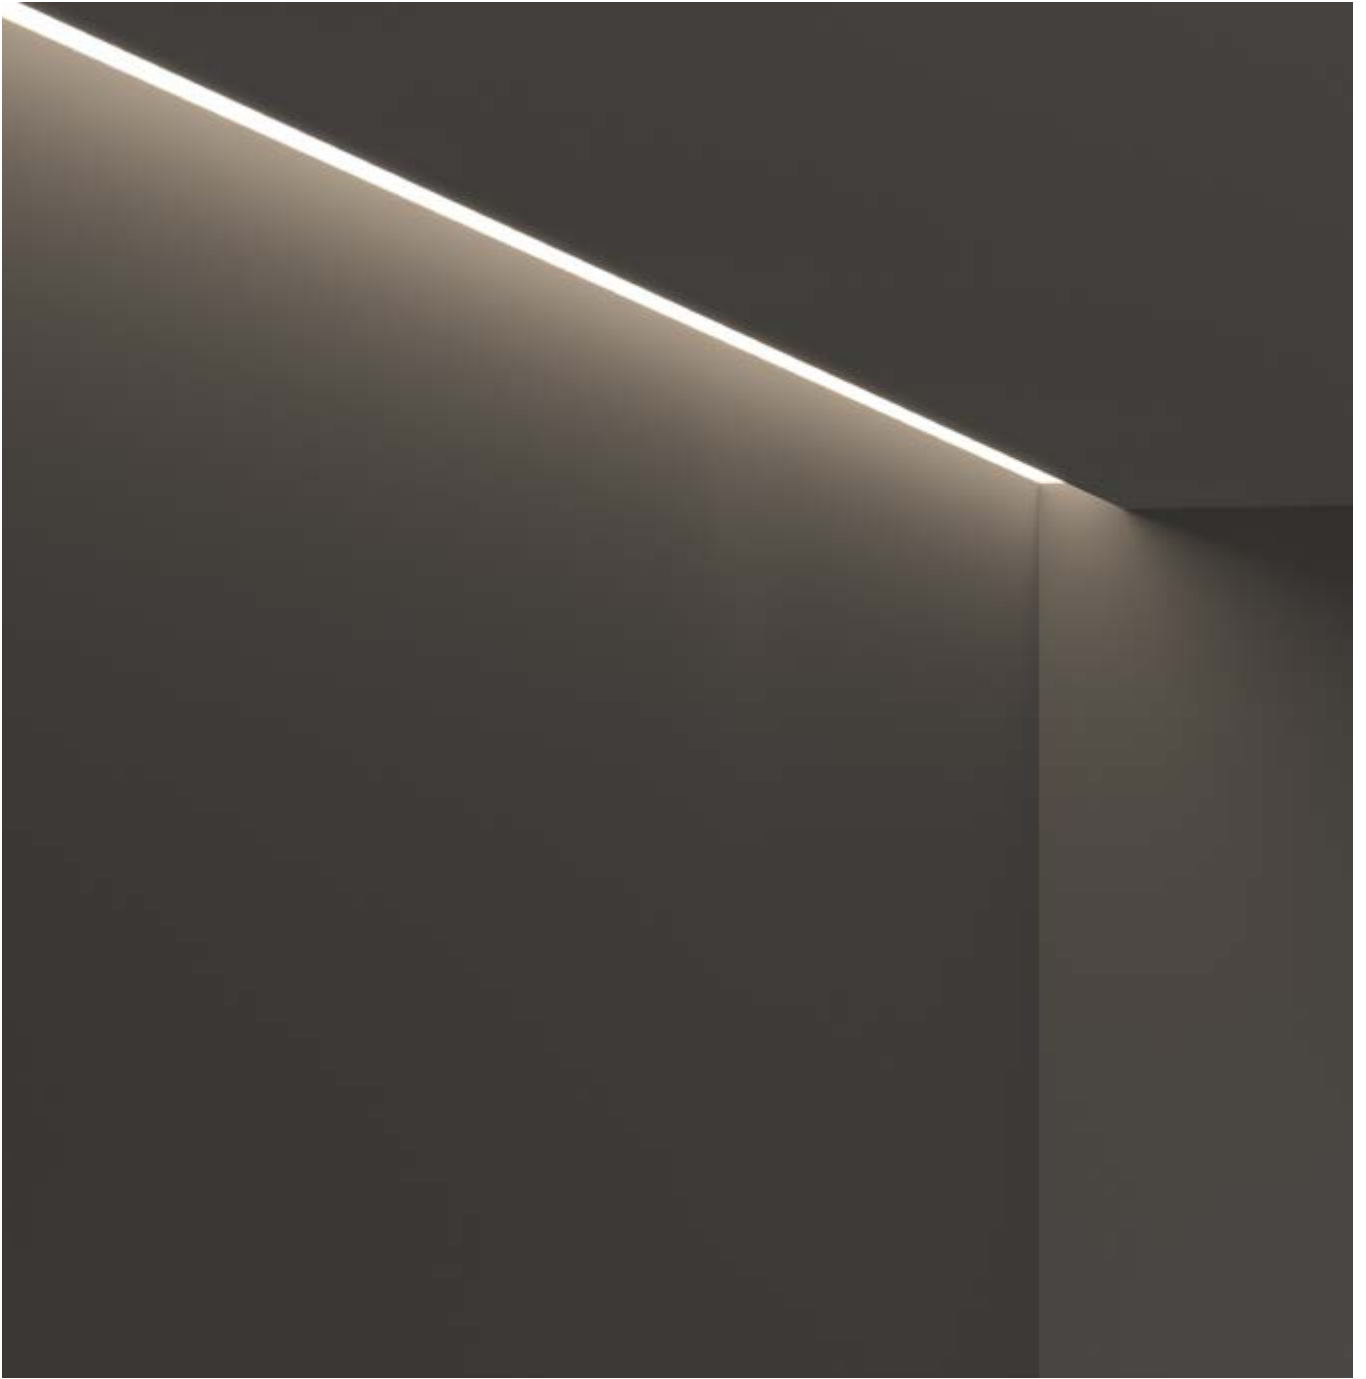

Mounting Kit included



346298
346304



339788
339795

FOX






IP20

MacAdam: SDCM 3 | LED COB BRIDGELUX | 50.000 h life



light beam: ACCENT

Material: Aluminum



90°




350°



0,300 Kg/0,0015 m³

Photometry



m	lx	°m
1	2067	0,77
2	517	1,54
3	230	2,30
4	129	3,07
5	83	3,84

Driver

Included

LENS



Model	Required	Beam	Finish	Code	€
On-Off	No	23°	Clear	349121	5
1-10V	No	23°	Clear	302744	5

CEILING CONNECTION



Required	Control	Finish	Code	€
No	On-Off	White	170145	23
No	On-Off	Black	170152	23

Cylindrical extruded aluminum projector suitable for installation on single-phase and three-phase LINK track. 1-10 V or DALI dimmable versions available. Perfect for lighting the small and medium size environments that require wide flexibility for arrangement, such as COMMERCIAL and RETAIL spaces, and an optimal performance-price ratio.



8W
On-Off

15W
On-Off

25W
On-Off






IP20

MacAdam: SDCM 3 | LED COB BRIDGELUX | 50.000 h life



light beam: ACCENT

Material: Aluminum




Power	Installation	Beam
15W	Link 3-Phase	41°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	1550 lm	2700 K	White	340883	50
≥90	On-Off	1550 lm	2700 K	Black	340876	50
≥90	On-Off	1600 lm	3000 K	White	285382	50
≥90	On-Off	1600 lm	3000 K	Black	285375	50
≥90	On-Off	1700 lm	4000 K	White	322360	50
≥90	On-Off	1700 lm	4000 K	Black	322346	50
≥90	1-10V	1600 lm	3000 K	White	302560	80
≥90	1-10V	1600 lm	3000 K	Black	302553	80
≥90	DALI	1600 lm	3000 K	White	302584	110
≥90	DALI	1600 lm	3000 K	Black	302577	110
≥80	On-Off	1900 lm	3000 K	White	250434	50
≥80	On-Off	1900 lm	3000 K	Black	250427	50
≥80	On-Off	1900 lm	3000 K	Brass	283937	55
≥80	On-Off	2000 lm	4000 K	White	267784	50
≥80	On-Off	2000 lm	4000 K	Black	267777	50

Power	Installation	Beam
15W	Link 1-Phase	39°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	1600 lm	3000 K	Black	348315	40

Photometry



m	lx	øm
1	3204	0,80
2	801	1,60
3	356	2,40
4	200	3,20
5	128	4,00

Driver

Included



90°



350°




0,380 Kg/0,0020 m³



	LENS					
	Model	Required	Beam	Finish	Code	€
	On-Off	No	15°	 Clear	349138	5
	1-10V/DALI	No	15°	 Clear	302751	5
	CEILING CONNECTION					
	Required	Control	Finish		Code	€
	No	On-Off	 White		170145	23
	No	On-Off	 Black		170152	23

Fox is suitable for installation on LINK series track: Link 3-Phase - Page 232 / Link 1-Phase - Page 227
The optional lens must be ordered in concomitance with the product and will be mounted inside the product as replacement for the default one.



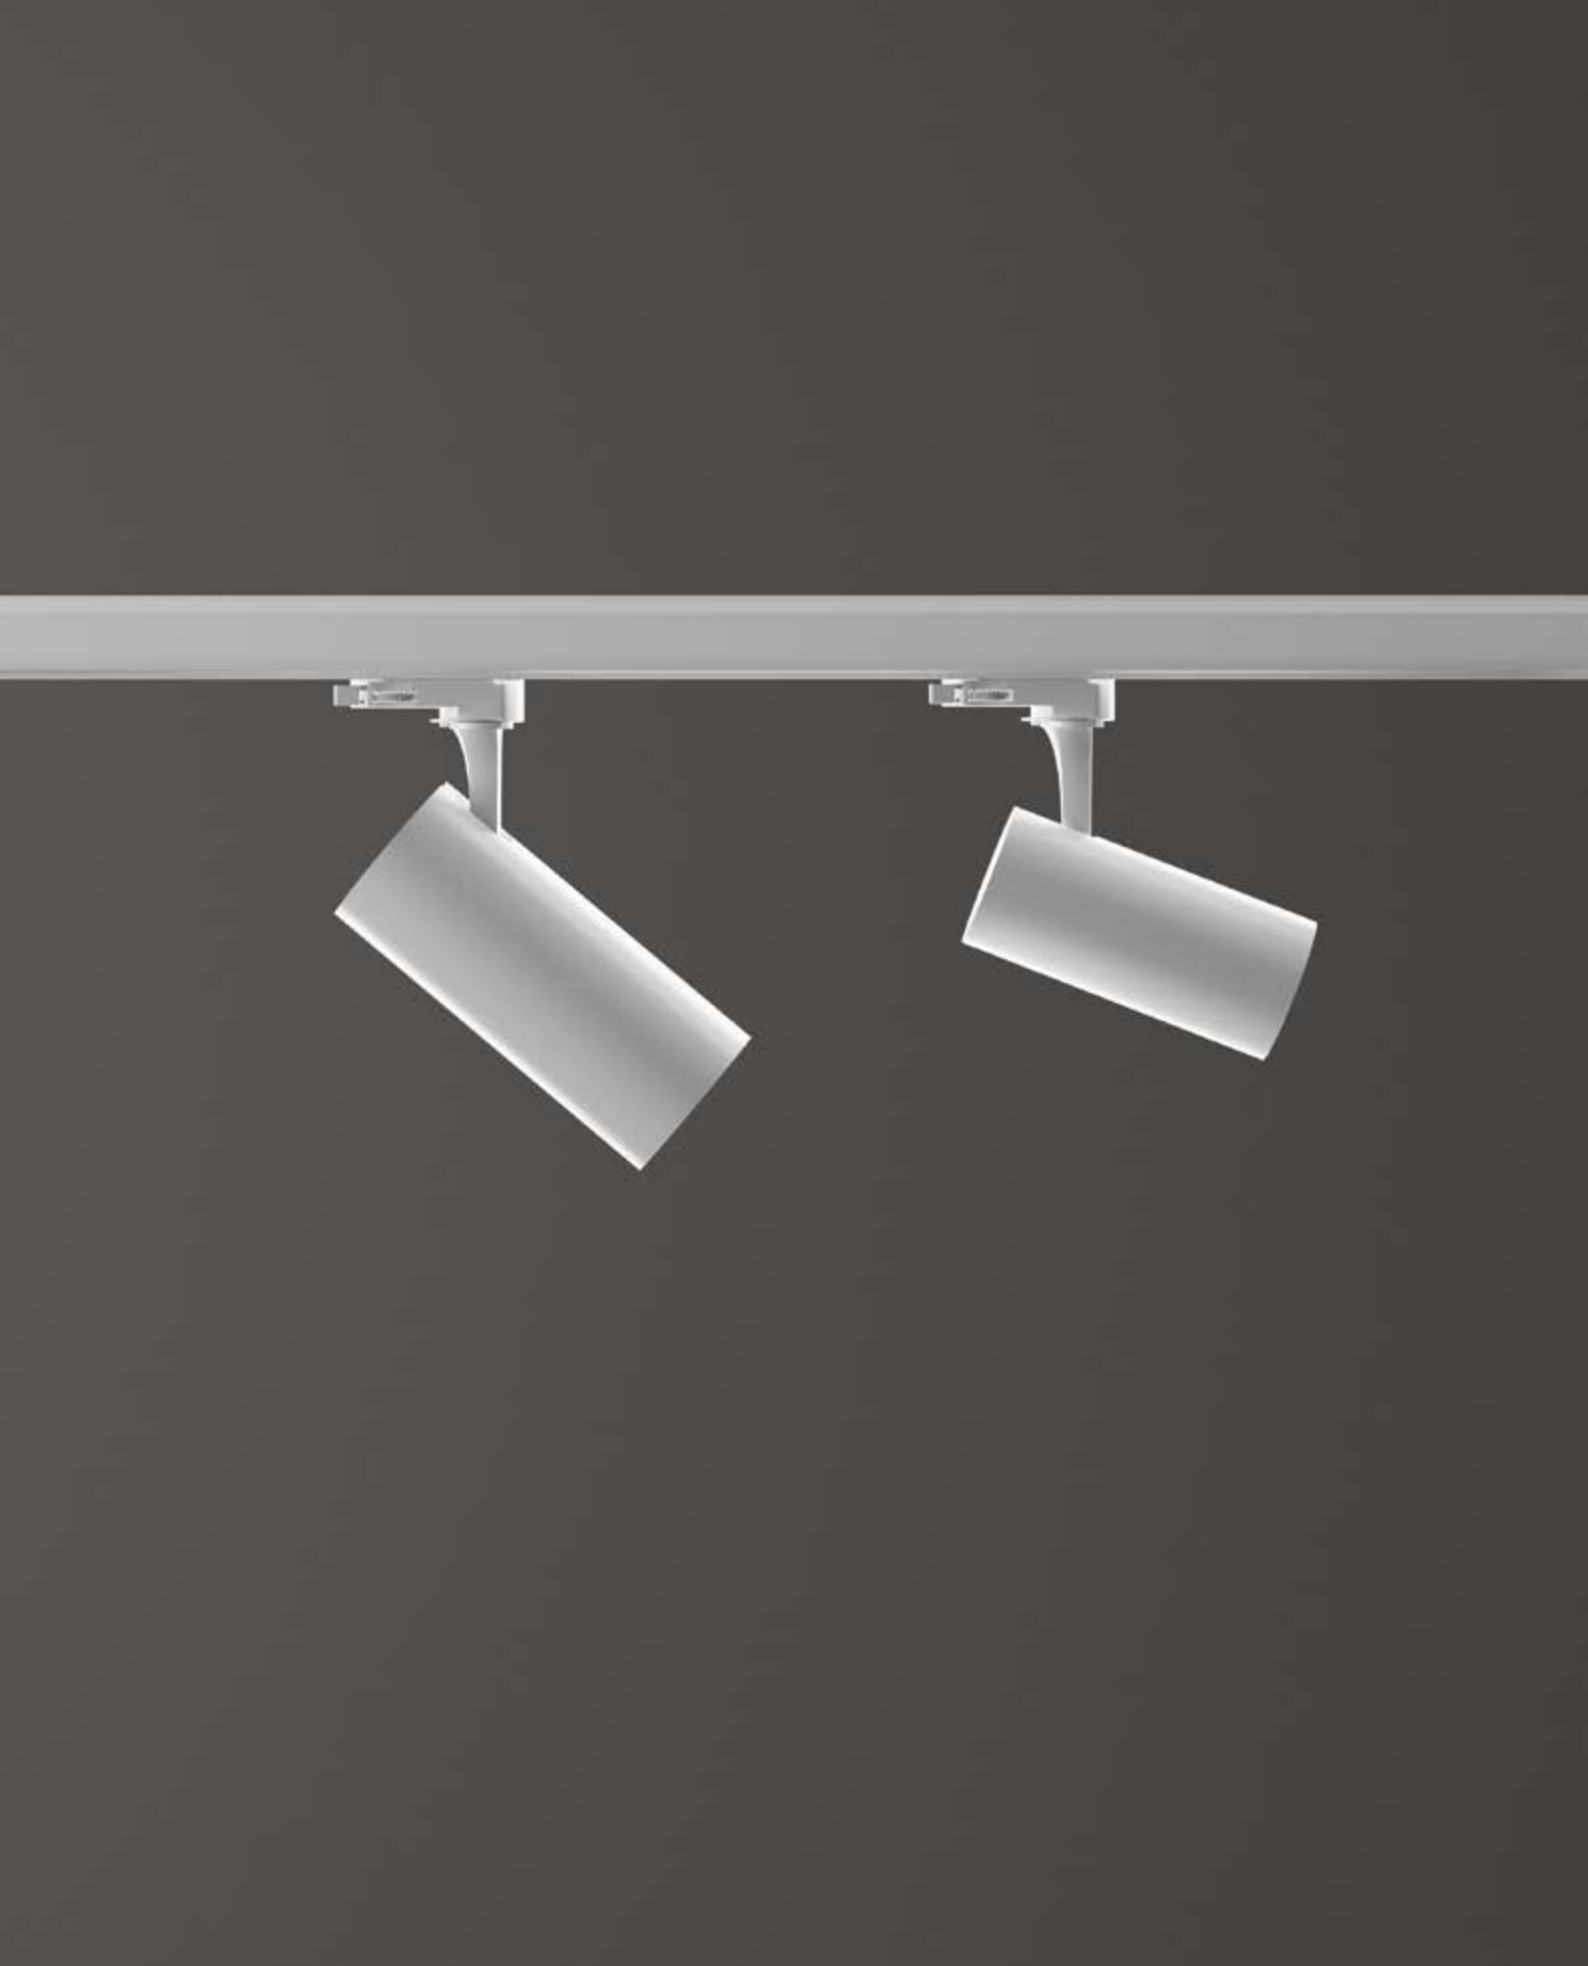



IP20

MacAdam: SDCM 3 | LED COB BRIDGELUX | 50.000 h life




light beam: ACCENT

Material: Aluminum



Power	Installation	Beam
25W	Link 3-Phase	35°


CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	2800 lm	2700 K	White	340944	55
≥90	On-Off	2800 lm	2700 K	Black	340937	55
≥90	On-Off	2900 lm	3000 K	White	285405	55
≥90	On-Off	2900 lm	3000 K	Black	285399	55
≥90	On-Off	3050 lm	4000 K	White	322391	55
≥90	On-Off	3050 lm	4000 K	Black	322377	55
≥90	1-10V	2900 lm	3000 K	White	302607	100
≥90	1-10V	2900 lm	3000 K	Black	302591	100
≥90	DALI	2900 lm	3000 K	White	302621	115
≥90	DALI	2900 lm	3000 K	Black	302614	115
≥80	On-Off	3300 lm	3000 K	White	250458	55
≥80	On-Off	3300 lm	3000 K	Black	250441	55
≥80	On-Off	3300 lm	3000 K	Brass	283944	60
≥80	On-Off	3500 lm	4000 K	White	267807	55
≥80	On-Off	3500 lm	4000 K	Black	267791	55



Power	Installation	Beam
25W	Link 1-Phase	35°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	3000 lm	3000 K	Black	348322	45

Photometry



m	lx	øm
1	8140	0,61
2	2035	1,22
3	904	1,82
4	509	2,43
5	326	3,04

Driver

Included



90°



350°



0,540 Kg/0,0027 m³



LENS						
Model	Required	Beam	Finish	Code	€	
On-Off	No	15°	☐ Clear	349145	5	
1-10V/DALI	No	15°	☐ Clear	302768	5	



CEILING CONNECTION				
Required	Control	Finish	Code	€
No	On-Off	☐ White	170145	23
No	On-Off	☒ Black	170152	23

EOS



eos




IP20

MacAdam: SDCM 3 | 50.000 h life



light beam: from SPOT to WIDE

Material: Aluminum




Power	Installation	Beam	CRI	Source
15W	Link 3-Phase	20-55°	≥90	LED COB BRIDGELUX

Control	Lumen	CCT	Finish	Code	€
On-Off	1650 lm	2700 K	White	340807	73
On-Off	1650 lm	2700 K	Black	340791	73
On-Off	1700 lm	3000 K	White	286594	73
On-Off	1700 lm	3000 K	Black	276182	73
On-Off	1850 lm	4000 K	White	322094	73
On-Off	1850 lm	4000 K	Black	322087	73
1-10V	1700 lm	3000 K	White	302959	116
1-10V	1700 lm	3000 K	Black	302942	116
DALI	1700 lm	3000 K	White	302997	135
DALI	1700 lm	3000 K	Black	302980	135

Power	Installation	Beam	CRI
15W	Link 1-Phase	20-55°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1700 lm	3000 K	Black	337579	65

Photometry



m	lx	am
1	1774	1,10
2	444	2,20
3	197	3,30
4	111	4,40
5	71	5,50



Driver

Included

90°	355°	0,710 Kg/0,0038 m³

CEILING CONNECTION					
Model	Required	Control	Finish	Code	€
3-Phase	No	On-Off	White	170145	23
3-Phase	No	On-Off	Black	170152	23

Extruded aluminum cylindrical tracklight with variable opening beam from narrow to wide, suitable for single-phase or three-phase LINK track installation. Dimmable 1-10 V or DALI versions available. Ideal for installation in big rooms, where great flexibility and high color rendering is required, such as EXHIBITION, MUSEUMS and COMMERCIAL.

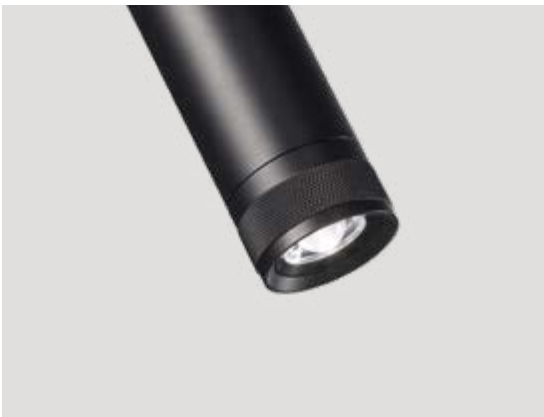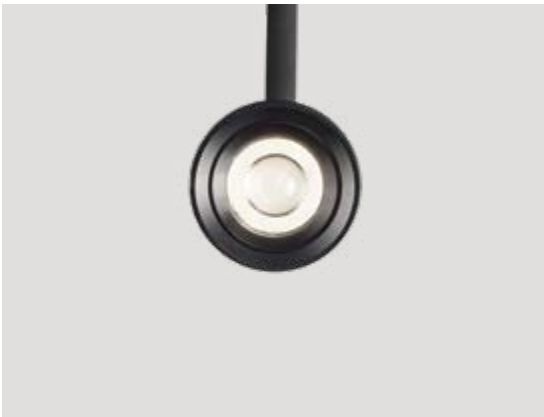

15W
1-10V/ DALI

15W
On-Off








IP20

MacAdam: SDCM 3 | 50.000 h life



light beam: from SPOT to WIDE

Material: Aluminum



90°



355°



1,100 Kg/0,0051 m³


Power	Installation	Beam	CRI	Source
25W	Link 3-Phase	20-55°	≥90	LED COB BRIDGELUX

Control	Lumen	CCT	Finish	Code	€
On-Off	2900 lm	2700 K	White	340821	92
On-Off	2900 lm	2700 K	Black	340814	92
On-Off	2950 lm	3000 K	White	286600	92
On-Off	2950 lm	3000 K	Black	276243	92
On-Off	3100 lm	4000 K	White	322124	92
On-Off	3100 lm	4000 K	Black	322100	92
1-10V	2950 lm	3000 K	White	302973	135
1-10V	2950 lm	3000 K	Black	302966	135
DALI	2950 lm	3000 K	White	303017	155
DALI	2950 lm	3000 K	Black	303000	155

Power	Installation	Beam	CRI
25W	Link 1-Phase	20-55°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2900 lm	3000 K	Black	342740	85

Photometry



m	lx	øm
1	3594	1,10
2	899	2,20
3	399	3,30
4	225	4,40
5	144	5,50

Driver

Included

CEILING CONNECTION



Model	Required	Control	Finish	Code	€
3-Phase	No	On-Off	White	170145	23
3-Phase	No	On-Off	Black	170152	23

PLAY



play spot




IP20

MacAdam: SDCM 3 | LED COB | 50.000 h life



Light beam: SPOT

Material: Aluminum



90°



355°




0,240Kg / 0,0008 m³

Power	Installation	Beam	CRI
7W	Link 3-Phase	16°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	520 lm	3000 K	White	364698	70
On-Off	520 lm	3000 K	Black	370903	70


Photometry



m	lx	øm
1	4730	0,25
2	1182	0,50
3	526	0,75
4	296	1,00
5	189	1,20

Driver

ON/OFF included



90°



355°




0,240Kg / 0,0008 m³

Power	Installation	Beam	CRI
13W	Link 3-Phase	18°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	White	364704	75
On-Off	900 lm	3000 K	Black	370927	75

Photometry



m	lx	øm
1	3163	0,43
2	791	0,86
3	351	1,30
4	198	1,70
5	127	2,10

Driver

ON/OFF included

CEILING CONNECTION



Required	Control	Finish	Code	€
No	On-Off	White	170145	23
No	On-Off	Black	170152	23


DYNAMITE



dynamite spot

IP20

Material: Aluminum



Power	Installation
28W max	Link 1-Phase, Link 3-Phase

TRACK	Finish	Code	€
3-Phase	White	274508	36
3-Phase	Black	274515	36
1-Phase	White	371443	36
1-Phase	Black	337524	36

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
540 lm	3000 K	123943	2,50




90°



355°



0,200 Kg/0,0020 m³



Power	Installation
28W max	Link 3-Phase

TRACK	Finish	Code	€
3-Phase	White	371450	25
3-Phase	Black	371474	25

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
280 lm	3000 K	339771	2,50




90°



355°



0,150 Kg/0,0016 m³



Power	Installation
28W max	Link 3-Phase

TRACK	Finish	Code	€
3-Phase	White	371498	38
3-Phase	Black	371528	38

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
540 lm	3000 K	123943	2,50



90°



355°



0,240 Kg/0,0022 m³

CEILING CONNECTION

Model	Required	Beam	Control	Finish	Code	€
3-Phase	No		On-Off	White	170145	23
3-Phase	No		On-Off	Black	170152	23




LOOK



look track

IP20



0,930 Kg/0,0033 m³

Power		Installation		
28W max		Link 3-Phase		
TRACK	Finish	Code	€	
3-Phase	 White	231662	80	
3-Phase	 Black	231631	80	
Lampadina inclusa GU10				
Lumen	CCT	Code	€	
540 lm	3000 K	123943	2,50	
CEILING CONNECTION				
Required	Control	Finish	Code	€
No	On-Off	 White	170145	23
No	On-Off	 Black	170152	23

DISPLAY



display accent

IP20


UGR <16

MacAdam: SDCM 3 | 50.000 h life

Light beam: ACCENT

PRO

Material: Aluminum



0,681 Kg/0,0028 m³

Power	Installation	Beam	CRI	Source
14W	Link 3-Phase	60°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	White	283593	170
On-Off	1400 lm	3000 K	Black	283609	170
On-Off	1550 lm	4000 K	White	283616	170
On-Off	1550 lm	4000 K	Black	283623	170
DALI	1400 lm	3000 K	White	375267	225
DALI	1400 lm	3000 K	Black	375243	225
DALI	1550 lm	4000 K	White	375304	225
DALI	1550 lm	4000 K	Black	375281	225


Photometry



m	lx	ø(m)
1	1330	1,20
2	332	2,40
3	148	3,50
4	83	4,70
5	53	5,90

Driver

ON/OFF included



1,120 Kg/0,0072 m³

Power	Installation	Beam	CRI	Source
28W	Link 3-Phase	60°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	2800 lm	3000 K	White	283524	265
On-Off	2800 lm	3000 K	Black	276267	265
On-Off	3100 lm	4000 K	White	283531	265
On-Off	3100 lm	4000 K	Black	283548	265
DALI	2800 lm	3000 K	White	375342	305
DALI	2800 lm	3000 K	Black	375328	305
DALI	3100 lm	4000 K	White	375373	305
DALI	3100 lm	4000 K	Black	375359	305

Photometry



m	lx	ø(m)
1	2453	1,30
2	613	2,50
3	273	3,80
4	153	5,00
5	96	6,30

Driver

ON/OFF included

display accent

IP20


UGR <16

MacAdam: SDCM 3 | 50.000 h life

Light beam: ACCENT

PRO

Material: Aluminum




1,570 Kg/0,0100 m³

Power	Installation	Beam	CRI	Source
42W	Link 3-Phase	60°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	4200 lm	3000 K	White	283555	370
On-Off	4200 lm	3000 K	Black	283562	370
On-Off	4650 lm	4000 K	White	283579	370
On-Off	4650 lm	4000 K	Black	283586	370

Photometry



m	lx	øm
1	3598	1.30
2	900	2.50
3	400	3.80
4	225	5.00
5	144	6.30

Driver

ON/OFF included



Display Accent 535 mm




Display Accent 1065 mm



Display Accent 1595 mm





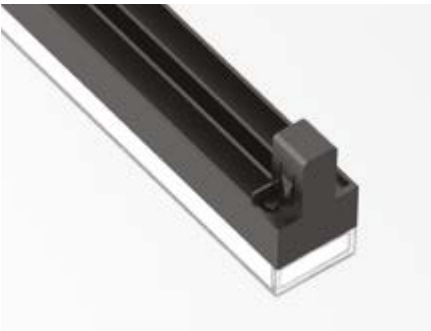

Display Wide 565 mm



Display Wide 1125 mm



display wide



IP20


MacAdam: SDCM 3 | 50.000 h life



Light beam: WIDE



Material: Aluminum



0,430 Kg/0,0026 m³

Power

Installation

Beam

CRI

Source

21W

Link 3-Phase

125°

≥90

LED SMD SAMSUNG

Control

Lumen

CCT

Finish

Code

€

On-Off

2550 lm

3000 K

White

283753

140

On-Off

2550 lm

3000 K

Black

283760

140

On-Off

2900 lm

4000 K

White

276274

140

On-Off

2900 lm

4000 K

Black

283777

140

DALI

2550 lm

3000 K

White

375335

190

DALI

2550 lm

3000 K

Black

375311

190

DALI

2900 lm

4000 K

White

375380

190

DALI

2900 lm


4000 K

Black

375366

190


Photometry



m	lx	øm
1	473	5,20
2	118	6,50
3	53	9,70
4	30	13,00
5	19	16,00

Driver

ON/OFF included



0,770 Kg/0,0050 m³

Power

Installation

Beam

CRI

Source

40W

Link 3-Phase

125°

≥90

LED SMD SAMSUNG

Control

Lumen

CCT

Finish

Code

€

On-Off

5500 lm

3000 K

White

283722

215

On-Off

5500 lm

3000 K

Black

283050

215

On-Off

5800 lm

4000 K

White

283739

215

On-Off

5800 lm

4000 K

Black

283746

215

DALI

5500 lm

3000 K

White

375410

260

DALI

5500 lm

3000 K

Black

375403

260

DALI

5800 lm

4000 K

White

375458

260

DALI

5800 lm


4000 K

Black

375434

260

Photometry



m	lx	øm
1	897	3,10
2	224	6,10
3	100	9,20
4	56	12,00
5	36	15,00

Driver

ON/OFF included

display ugr



IP20



UGR <22


MacAdam: SDCM 3 | 50.000 h life



Light beam: WIDE



Material: Aluminum




0,650 Kg/0,0028 m³

Power	Installation	Beam	CRI	Source
14W	Link 3-Phase	70°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	1900 lm	3000 K	White	283685	150
On-Off	1900 lm	3000 K	Black	283692	150
On-Off	2000 lm	4000 K	White	283708	150
On-Off	2000 lm	4000 K	Black	283715	150
DALI	1900 lm	3000 K	White	375427	210
DALI	1900 lm	3000 K	Black	375397	210
DALI	2000 lm	4000 K	White	375465	210
DALI	2000 lm	4000 K	Black	375441	210


Photometry



m	lx	øm
1	854	1,40
2	213	2,80
3	95	4,20
4	53	5,70
5	34	7,10

Driver

ON/OFF included




1,120 Kg/0,0050 m³

Power	Installation	Beam	CRI	Source
25W	Link 3-Phase	70°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	3800 lm	3000 K	White	283647	235
On-Off	3800 lm	3000 K	Black	283630	235
On-Off	4000 lm	4000 K	White	276281	235
On-Off	4000 lm	4000 K	Black	283258	235
DALI	3800 lm	3000 K	White	375250	280
DALI	3800 lm	3000 K	Black	375236	280
DALI	4000 lm	4000 K	White	375298	280
DALI	4000 lm	4000 K	Black	375274	280

Photometry



m	lx	øm
1	1636	1,40
2	409	2,80
3	182	4,20
4	102	5,70
5	65	7,10

Driver

ON/OFF included

display ugr

IDEAL LUX

TECHNICAL

DISPLAY

IP20


UGR <22

MacAdam: SDCM 3 | 50.000 h life

Light beam: WIDE

PRO

Material: Aluminum



1,570 Kg/0,0173 m³

Power	Installation	Beam	CRI	Source
40W	Link 3-Phase	70°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	5700 lm	3000 K	White	283654	330
On-Off	5700 lm	3000 K	Black	283067	330
On-Off	6000 lm	4000 K	White	283661	330
On-Off	6000 lm	4000 K	Black	283678	330

Photometry



m	lx	øm
1	2419	1,40
2	605	2,80
3	269	4,20
4	151	5,70
5	97	7,10

Driver

ON/OFF included

LINK






Single-phase and Three-phase electrified track with extruded aluminum profile; black or white powder coated, optimized for standard 3-Phase/1-Phase or equivalent projectors; available in ceiling, suspension or recessed versions with edge for installation on plasterboard ceilings; suitable for continuous lines systems, standard modules of 1000mm, 2000mm or 3000mm modules length. Ideal for installation in big spaces where flexibility and long connection distances are required, for example MUSEUM, COMMERCIAL and RETAIL spaces.

link 1-phase surface on-off assembly plans

- 01 End cap
- 02 Track
- 03 Power supply central joint
- 04 L-joint
- 05 Linear joint
- 06 Power supply end

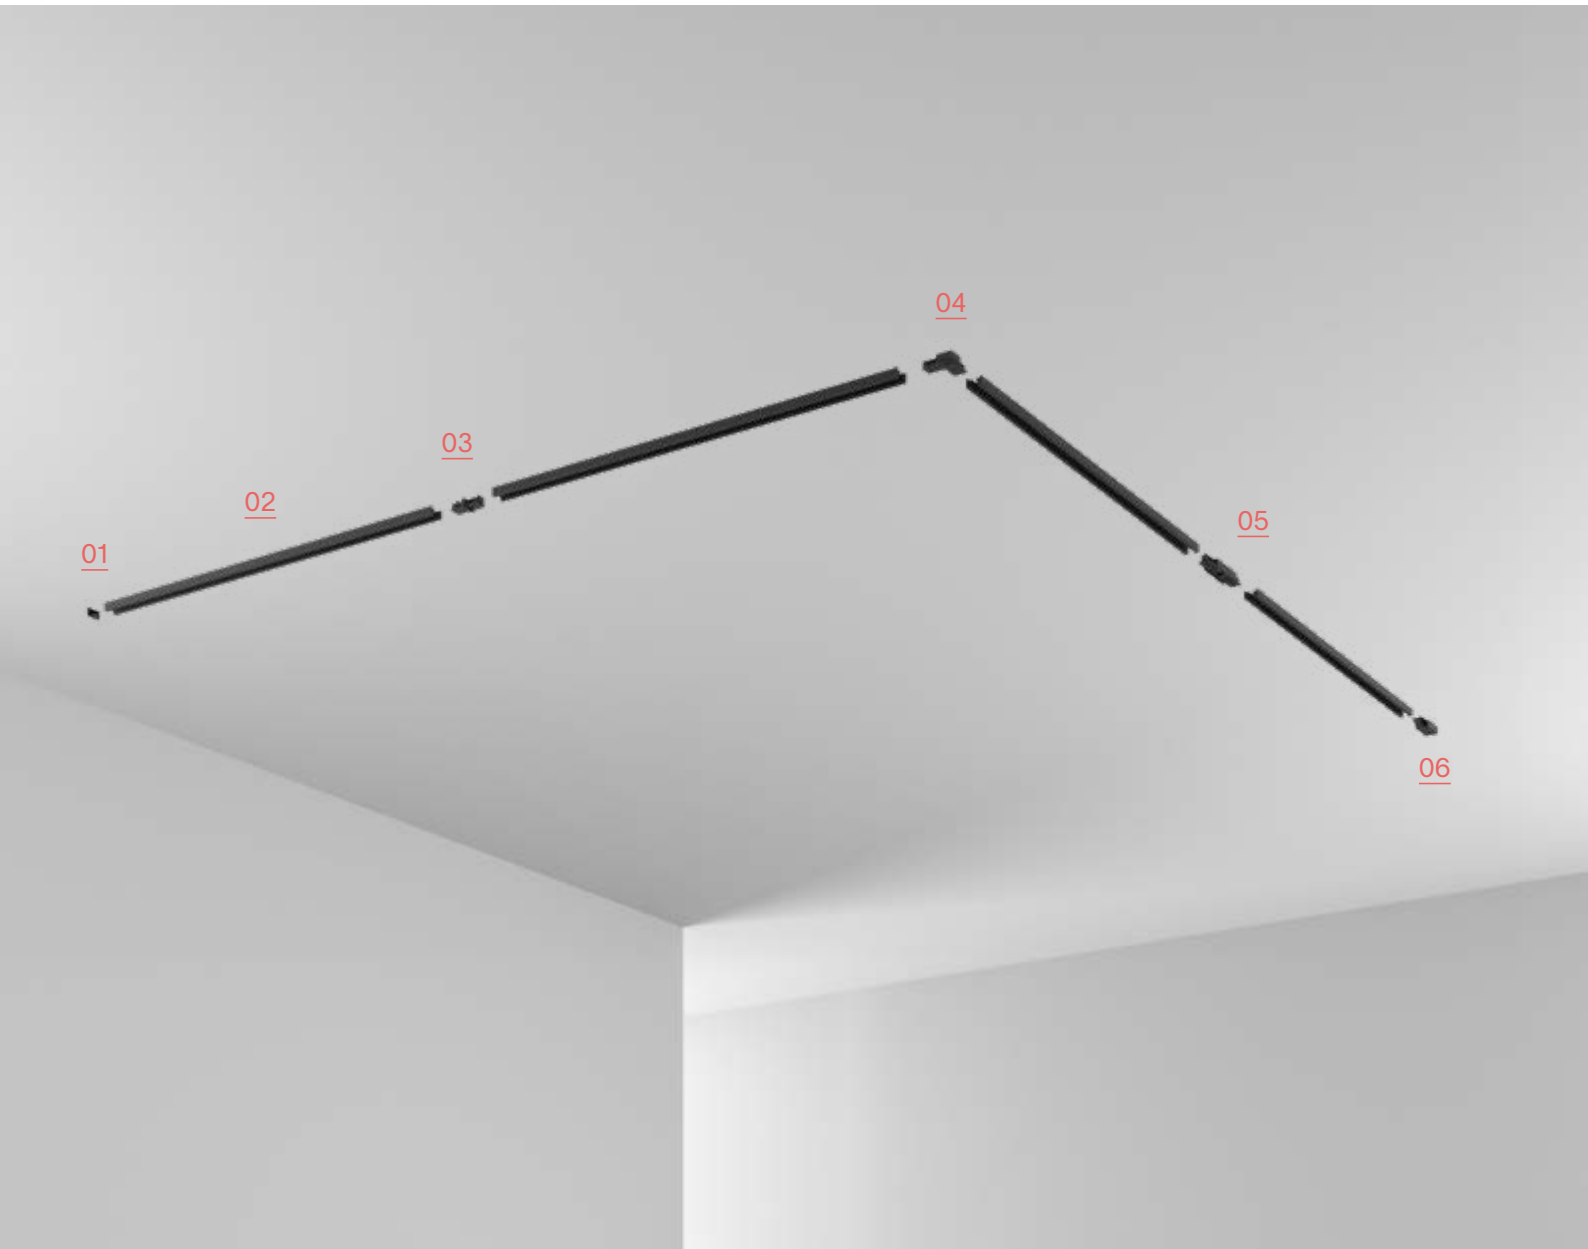


link 1-phase surface on-off

	IP20	TRACK	No mounting Kit required, direct ceiling installation.				Material: Aluminum			
			Length	Weight	Volume	Finish	Code	€		
			1000 mm	0,42 Kg	0,0012 m³	● Black	337371	13		
			2000 mm	0,83 Kg	0,0024 m³	● Black	342801	24		
			3000 mm	1,22 Kg	0,0036 m³	● Black	344973	35		
										
	IP20	END CAP	Material: Aluminum							
			Required	Finish	Code	€				
			Yes	● Black	337395	3				
										
	IP20	POWER SUPPLY END	Material: Aluminum							
			Weight	Volume	Finish	Code	€			
			0,060 Kg	0,0001 m³	● Black	337388	3			
										
	IP20	POWER SUPPLY CENTRAL JOINT	Material: Aluminum							
			Weight	Volume	Finish	Code	€			
			0,070 Kg	0,0001 m³	● Black	337425	5			
										
	IP20	LINEAR JOINT	Material: Aluminum							
			Weight	Volume	Finish	Code	€			
			0,040 Kg	0,0001 m³	● Black	337418	3			
										
	IP20	L-JOINT	Material: Aluminum							
			Weight	Volume	Finish	Code	€			
			0,060 Kg	0,0001 m³	● Black	337401	3			
										


link 1-phase recessed on-off assembly plans

- 01 End cap
- 02 Track
- 03 Power supply central joint
- 04 L-joint
- 05 Linear joint
- 06 Power supply end

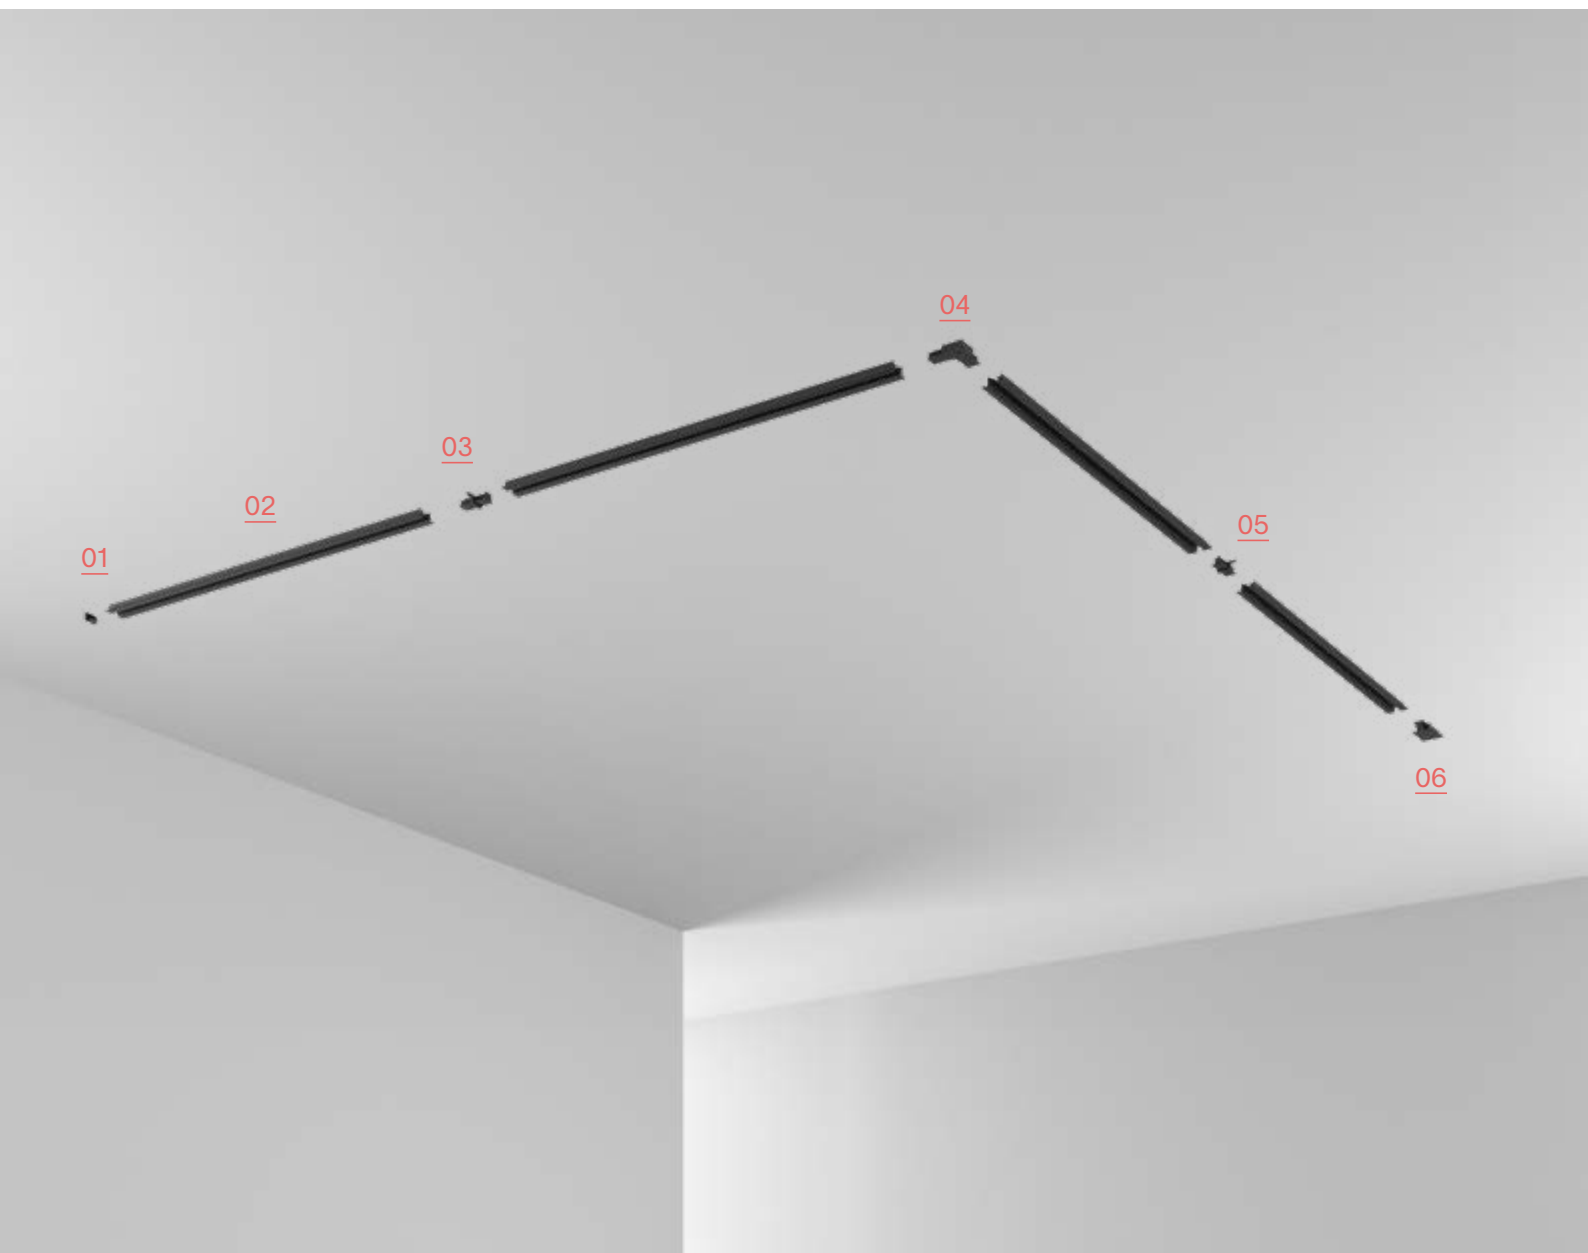

link 1-phase recessed on-off


 IP20	TRACK						Material: Aluminum
		Length	Weight	Volume	Finish	Code	€
		1000 mm	0,49 Kg	0,0012 m³	● Black	342818	14
		2000 mm	0,94 Kg	0,0024 m³	● Black	342825	28
		3000 mm	1,39 Kg	0,0036 m³	● Black	344966	42




		END CAP	Material: Aluminum			
			Required	Finish	Code	€
			Yes	● Black	337395	3


		RECESSED MOUNTING KIT	Material: Aluminum			
			Required	Finish	Code	€
			Yes - 1 Kit x 1000 mm	● Alluminio	188195	5

 IP20  109	POWER SUPPLY END		Material: Aluminum		
	Weight	Volume	Finish	Code	€
	0,070 Kg	0,0001 m³	● Black	342832	5


 	IP20	LINEAR JOINT	Material: Aluminum				
			Weight	Volume	Finish	Code	€
			0,040 Kg	0,0001 m³	● Black	342856	3

 	IP20	L-JOINT	Material: Aluminum				
			Weight	Volume	Finish	Code	€
			0,100 Kg	0,0003 m³	● Black	342849	4

link 3-phase trimless
assembly plans

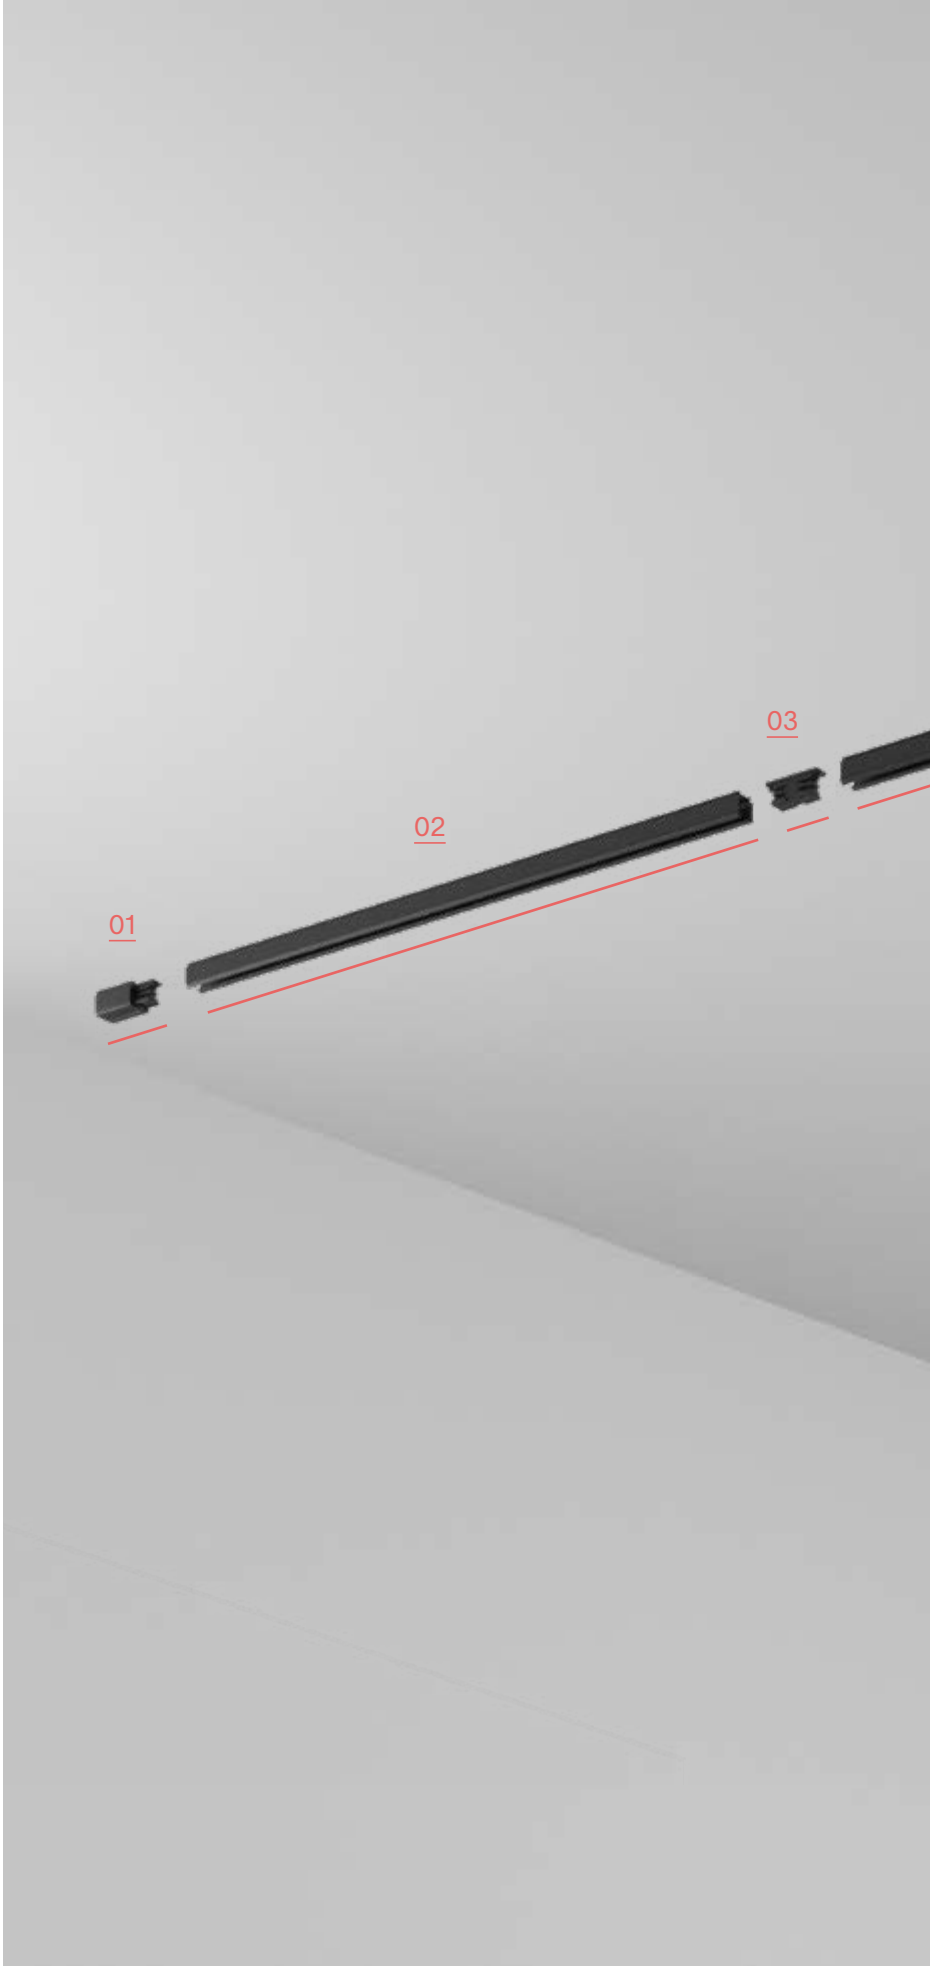

- 01 Power supply end
- 02 Track On/Off
- 03 Power supply central joint
- 04 L-joint
- 05 Linear joint
- 06 End cap

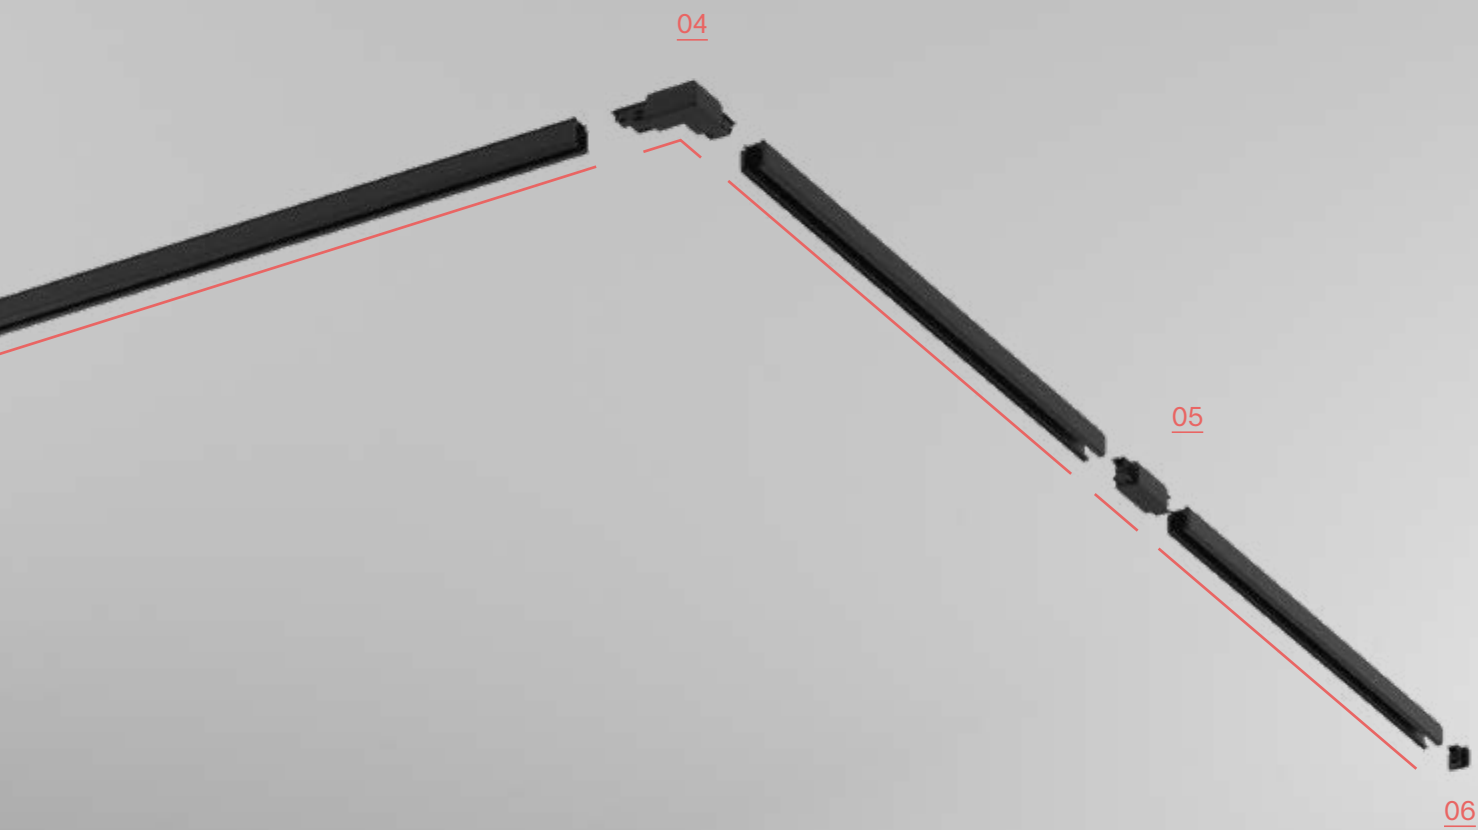

link 3-phase trimless on/off

IP20		TRACK				Material: Aluminum	
		Length	Weight	Volume	Finish	Code	€
		1000 mm	0,91 Kg	0,0016 m³	White	243269	30
		1000 mm	0,91 Kg	0,0016 m³	Black	243252	30
		2000 mm	1,81 Kg	0,0025 m³	White	187976	60
		2000 mm	1,81 Kg	0,0025 m³	Black	187983	60
		3000 mm	2,71 Kg	0,0037 m³	White	187990	95
		3000 mm	2,71 Kg	0,0037 m³	Black	188003	95
						Material: Aluminum	
		RECESSED MOUNTING KIT					
		Required		Finish	Code	€	
		Yes - 1 Kit x 1000 mm		White	169972	5	
		Yes - 1 Kit x 1000 mm		Black	169989	5	
						Material: Aluminum	
		SUSPENSION KIT		Required - 1 Kit x 1000 mm			
		N° Cavi	Cables Length	Finish	Code	€	
		1	3000 mm	White	242705	13	
		1	3000 mm	Black	243283	13	
		1	5000 mm	White	243245	15	
		1	5000 mm	Black	243238	15	
						Material: Aluminum	
		END CAP					
		Required		Finish	Code	€	
		Yes		White	169613	2	
		Yes		Black	169620	2	

link 3-phase trimless on/off



IP20

POWER SUPPLY END

Material: Aluminum



	Weight	Volume	Finish	Code	€
L	0,060 Kg	0,0001 m³	White	169583	5
L	0,060 Kg	0,0001 m³	Black	169576	9
R	0,060 Kg	0,0001 m³	White	169590	5
R	0,060 Kg	0,0001 m³	Black	169606	9



IP20

POWER SUPPLY CENTRAL JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,120 Kg	0,0002 m³	White	227580	12
	0,120 Kg	0,0002 m³	Black	227597	17



IP20

L-JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
L	0,120 Kg	0,0003 m³	White	169705	12
L	0,120 Kg	0,0003 m³	Black	169712	17
R	0,120 Kg	0,0003 m³	White	169736	12
R	0,120 Kg	0,0003 m³	Black	169729	17



IP20

LINEAR JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,030 Kg	0,0001 m³	White	169637	7
	0,030 Kg	0,0001 m³	Black	169644	7



IP20

TRACK ADAPTOR 3 POLES

Material: Aluminum



	Weight	Volume	Finish	Code	€
	0,080 Kg	0,0004 m³	White	194257	9
	0,080 Kg	0,0004 m³	Black	194301	9

link 3-phase trimless DALI - 1-10v

IP20 TRACK		Material: Aluminum				
35 36	Length	Weight	Volume	Finish	Code	€
	1000 mm	0,94 Kg	0,0016 m³	White	246468	38
	1000 mm	0,94 Kg	0,0016 m³	Black	246451	38
	2000 mm	1,93 Kg	0,0032 m³	White	247007	80
	2000 mm	1,93 Kg	0,0032 m³	Black	246901	80
	3000 mm	2,87 Kg	0,0048 m³	White	247625	115
	3000 mm	2,87 Kg	0,0048 m³	Black	247618	115

RECESSED MOUNTING KIT		Material: Aluminum				
	Required	Finish	Code	€		
	Yes - 1 Kit x 1000 mm	White	169972	5		
		Black	169989	5		

SUSPENSION KIT		Required - 1 Kit x 1000 mm			Material: Aluminum	
	N° Cavi	Cables Length	Finish	Code	€	
	1	3000 mm	White	242705	13	
	1	3000 mm	Black	243283	13	
	1	5000 mm	White	243245	15	
	1	5000 mm	Black	243238	15	

END CAP		Material: Aluminum				
	Required	Finish	Code	€		
	Yes	White	169613	2		
	Yes	Black	169620	2		

link 3-phase trimless DALI - 1-10v

IP20

POWER SUPPLY END

Material: Aluminum



	Weight	Volume	Finish	Code	€
L	0,080 Kg	0,0003 m³	White	246529	8
L	0,080 Kg	0,0003 m³	Black	246512	13
R	0,080 Kg	0,0003 m³	White	246543	8
R	0,080 Kg	0,0003 m³	Black	246536	13

IP20

POWER SUPPLY CENTRAL JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,130 Kg	0,0003 m³	White	246581	22
	0,130 Kg	0,0003 m³	Black	246574	25

IP20

L-JOINT

Material: Aluminum



	Weight	Volume	Finish	Code	€
L	0,130 Kg	0,0005 m³	White	246604	22
L	0,130 Kg	0,0005 m³	Black	246598	25
R	0,130 Kg	0,0005 m³	White	246628	22
R	0,130 Kg	0,0005 m³	Black	246611	25

IP20

LINEAR JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,050 Kg	0,0001 m³	White	246567	9
	0,050 Kg	0,0001 m³	Black	246550	9

IP20


TRACK ADAPTOR 5 POLES

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,070 Kg	0,0002 m³	White	246505	15
	0,070 Kg	0,0002 m³	Black	246499	15

link 3-phase trim
assembly plans

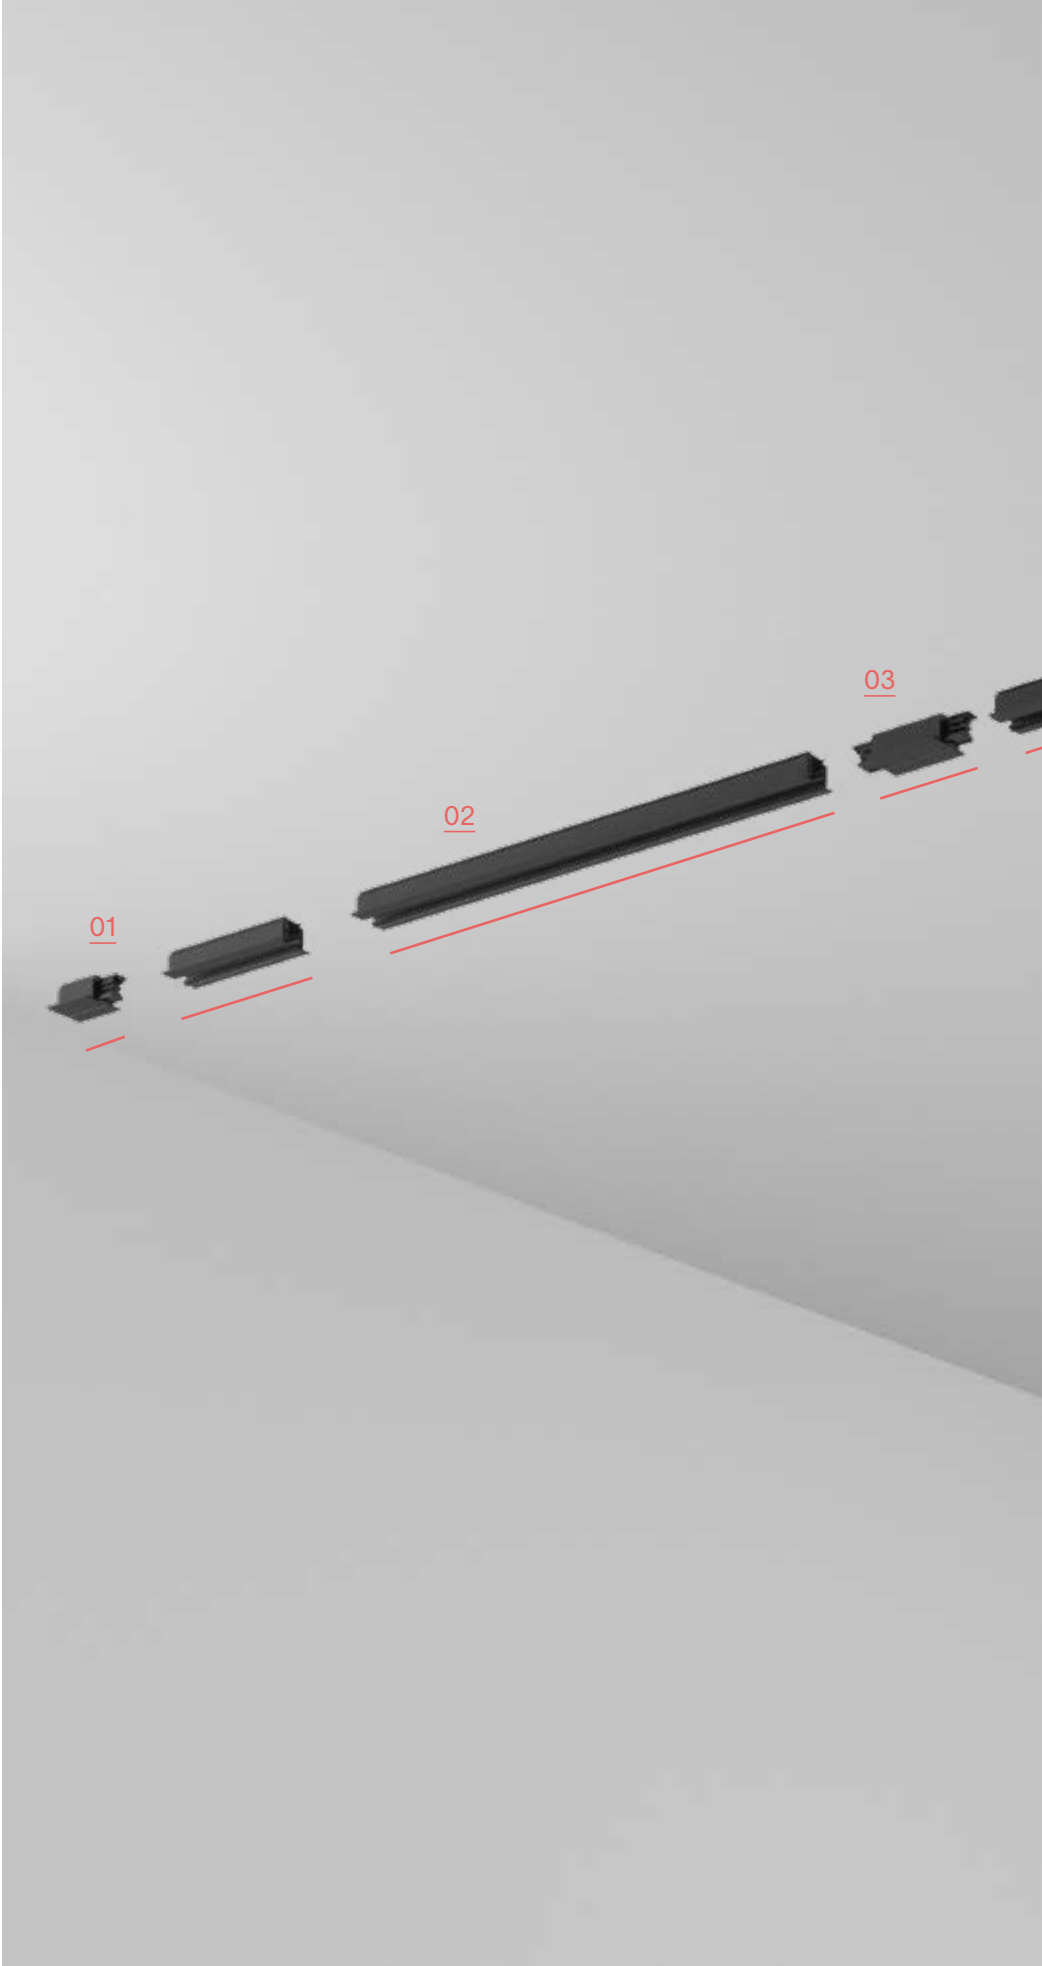

- 01 Power supply end
- 02 Track On/Off
- 03 Power supply central joint
- 04 L-joint
- 05 Linear joint
- 06 End cap

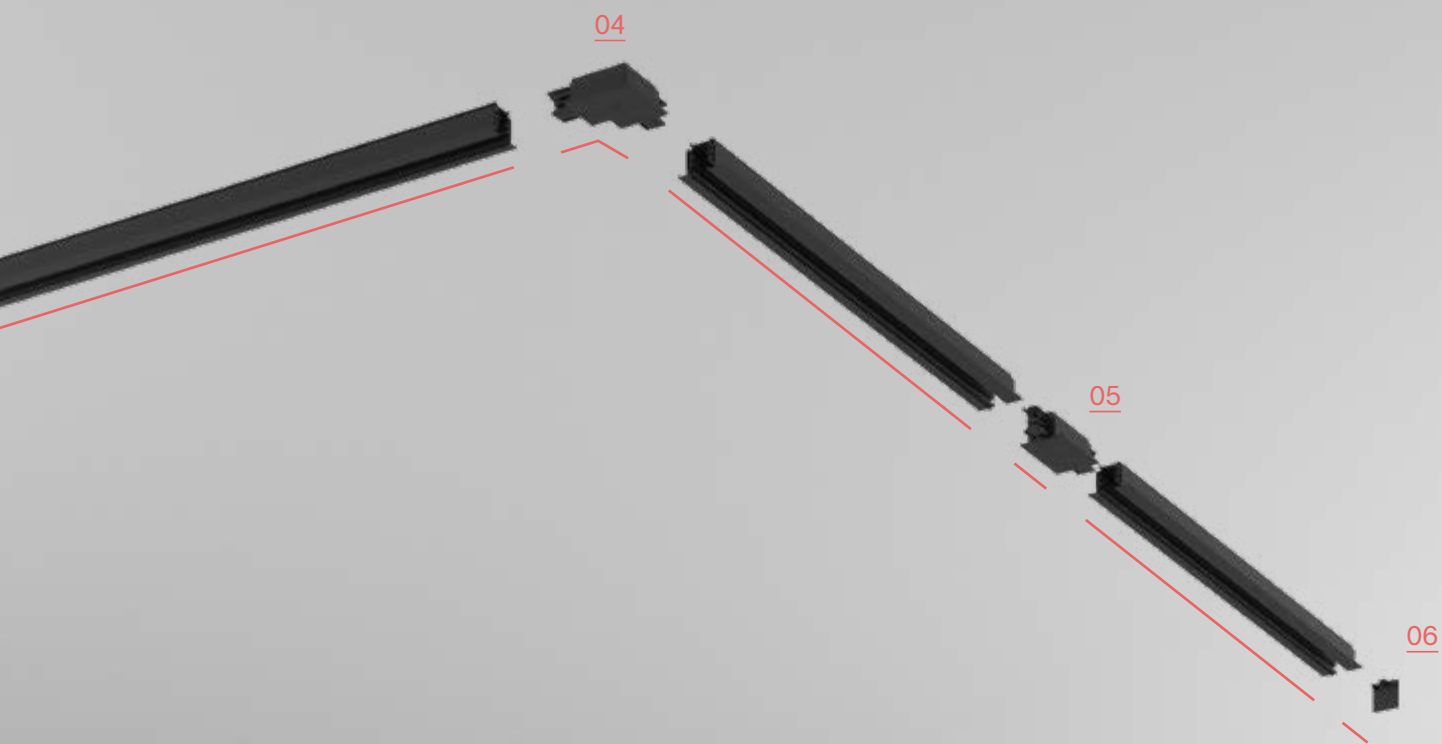

link 3-phase trim on/off

IP20		TRACK				Material: Aluminum		
			Length	Weight	Volume	Finish	Code	€
			2000 mm	1,92 Kg	0,0050 m³	White	188010	60
			2000 mm	1,92 Kg	0,0050 m³	Black	188027	60

		RECESSED MOUNTING KIT				Material: Aluminum	
	Required		Finish		Code	€	
	Yes - 1 Kit x 1000 mm		Alluminio		188195	5	

		END CAP				Material: Aluminum	
	Required		Finish		Code	€	
	Yes		White		169613	2	
	Yes		Black		169620	2	


link 3-phase trim on/off



IP20

POWER SUPPLY END

Material: Aluminum




	Weight	Volume	Finish	Code	€
L	0,070 Kg	0,0002 m³	White	188072	7
L	0,070 Kg	0,0002 m³	Black	188089	7
R	0,070 Kg	0,0002 m³	White	188058	7
R	0,070 Kg	0,0002 m³	Black	188065	7



IP20

POWER SUPPLY CENTRAL JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,220 Kg	0,0005 m³	White	227689	15
	0,220 Kg	0,0005 m³	Black	227672	15



IP20

L-JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
L	0,130 Kg	0,0006 m³	White	188119	15
L	0,130 Kg	0,0006 m³	Black	188126	15
R	0,130 Kg	0,0006 m³	White	188096	15
R	0,130 Kg	0,0006 m³	Black	188102	15



IP20

LINEAR JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,030 Kg	0,0001 m³	White	169637	7
	0,030 Kg	0,0001 m³	Black	169644	7



IP20


TRACK ADAPTOR 3 POLES

Material: Aluminum



	Weight	Volume	Finish	Code	€
	0,080 Kg	0,0004 m³	White	194257	9
	0,080 Kg	0,0004 m³	Black	194301	9

link 3-phase trim DALI - 1-10v

IP20 TRACK		Material: Aluminum																					
 		<table><tr><th>Length</th><th>Weight</th><th>Volume</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>2000 mm</td><td>2,11 Kg</td><td>0,0042 m³</td><td>● White</td><td>246895</td><td>75</td></tr><tr><td>2000 mm</td><td>2,11 Kg</td><td>0,0042 m³</td><td>● Black</td><td>249629</td><td>75</td></tr></table>	Length	Weight	Volume	Finish	Code	€	2000 mm	2,11 Kg	0,0042 m³	● White	246895	75	2000 mm	2,11 Kg	0,0042 m³	● Black	249629	75			
Length	Weight	Volume	Finish	Code	€																		
2000 mm	2,11 Kg	0,0042 m³	● White	246895	75																		
2000 mm	2,11 Kg	0,0042 m³	● Black	249629	75																		
RECESSED MOUNTING KIT		Material: Aluminum																					
		<table><tr><th>Required</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>Yes - 1 Kit x 1000 mm</td><td>● Alluminio</td><td>188195</td><td>5</td></tr></table>	Required	Finish	Code	€	Yes - 1 Kit x 1000 mm	● Alluminio	188195	5													
Required	Finish	Code	€																				
Yes - 1 Kit x 1000 mm	● Alluminio	188195	5																				
END CAP		Material: Aluminum																					
		<table><tr><th>Required</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>Yes</td><td>● White</td><td>169613</td><td>2</td></tr><tr><td>Yes</td><td>● Black</td><td>169620</td><td>2</td></tr></table>	Required	Finish	Code	€	Yes	● White	169613	2	Yes	● Black	169620	2									
Required	Finish	Code	€																				
Yes	● White	169613	2																				
Yes	● Black	169620	2																				


link 3-phase trim DALI - 1-10v



IP20

POWER SUPPLY END

Material: Aluminum




	Weight	Volume	Finish	Code	€
L	0,090 Kg	0,0003 m³	White	256085	10
L	0,090 Kg	0,0003 m³	Black	256078	10
R	0,090 Kg	0,0003 m³	White	256146	10
R	0,090 Kg	0,0003 m³	Black	256122	10



IP20

POWER SUPPLY CENTRAL JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,150 Kg	0,0005 m³	White	256115	25
	0,150 Kg	0,0005 m³	Black	256092	25



IP20

L-JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
L	0,150 Kg	0,0005 m³	White	256030	25
L	0,150 Kg	0,0005 m³	Black	255996	25
R	0,150 Kg	0,0005 m³	White	256061	25
R	0,150 Kg	0,0005 m³	Black	256047	25



IP20

LINEAR JOINT

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,050 Kg	0,0001 m³	White	246567	9
	0,050 Kg	0,0001 m³	Black	246550	9



IP20

TRACK ADAPTOR 5 POLES

Material: Aluminum




	Weight	Volume	Finish	Code	€
	0,070 Kg	0,0002 m³	White	246505	15
	0,070 Kg	0,0002 m³	Black	246499	15

ZEUS



zeus source



IP20



UGR <19

MacAdam: SDCM 3 | 50.000 h life




Light beam: ACCENT



Material: Aluminum



DIY



0,300 Kg/0,0015 m³


Power	Installation	Beam	CRI	Source
13W	Recessed	40°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	2700 K	● Grey	324807	66
On-Off	1050 lm	3000 K	● Grey	324814	66
On-Off	1150 lm	4000 K	● Grey	324821	66

DIMMABLE DRIVER* Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	21 W	350 mA	125x26x45 mm	324906	26
DALI/Push	20 W	350 mA	120x29x51 mm	324913	46

Photometry



m	lx	øm
1	1714	0,76
2	429	1,50
3	190	2,30
4	107	3,10
5	69	3,80

Driver

Required - ON/OFF included

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. ** Lens 40° included.




MacAdam: SDCM 3 | 50.000 h life



Light beam: ACCENT



Material: Aluminum



0,590 Kg/0,0032 m³


Power	Installation	Beam	CRI	Source
21W	Recessed	40°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	2700 K	● Grey	324838	106
On-Off	2100 lm	3000 K	● Grey	324845	106
On-Off	2300 lm	4000 K	● Grey	324852	106

DIMMABLE DRIVER* Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	500 mA	110x22x52 mm	324920	61
DALI/Push	20 W	500 mA	120x29x51 mm	324937	71

Photometry



m	lx	cdm
1	3174	0,81
2	794	1,60
3	353	2,40
4	198	3,20
5	127	4,00

Driver

Required - ON/OFF included

LENS 20°



Required	Model	Finish	Code	€
No	13W	● Clear	323688	4
No	21W	● Clear	323985	6

HONEYCOMB



Required	Model	Finish	Code	€
No	13W	● Black	323671	4
No	21W	● Black	323961	6

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. ** Lens 40° included.







Modular system of recessed elements consisting of an adjustable source, reflector and round or square ring, with optional shielding lenses and accessories; white and black finish; ring available in TRIM version with frame or TRIMLESS without frame for installation in plasterboard false ceilings; two different emission angles to choose from. Suitable for installations in indoor environments in the SERVICES and RETAIL sectors.


zeus round



①	⊞
70 mm	0,100 Kg/0,0002 m³


TRIM ROUND FRAME

Model	Installation		
13W	Recessed		
	Finish	Code	€
	 White	324869	15
	 Black	323527	15



①	⊞
100 mm	0,130 Kg/0,0005 m³


Model	Installation		
21W	Recessed		
	Finish	Code	€
	● White	324883	18
	● Black	324005	18



①	⊞
73 mm	0,120 Kg/0,0005 m³

TRIMLESS ROUND FRAME

Model	Installation		
13W	Recessed		
	Finish	Code	€
	 White	323541	18



①	⊞
105 mm	0,160 Kg/0,0008 m³





Model	Installation		
21W	Recessed		
	Finish	Code	€
	 White	323725	35



 0,030 Kg/0,0003 m³	ROUND REFLECTOR		Required	
	Model		Installation	
	13W		Recessed	
	Finish		Code	€
	 White		323589	8
	 Black		323619	8
	 Gold		323602	8
 0,040 Kg/0,0007 m³	Model		Installation	
	21W		Recessed	
	Finish		Code	€
	 White		323763	12
	 Black		323770	12
	 Gold		323794	12





zeus square

		TRIM SQUARE FRAME			
 ① 68X68 mm ② 0,100 Kg/0,0003 m³		Model	Installation		
		13W	Recessed		
			Finish	Code	€
			● White	324876	15
			● Black	323534	15
 ① 96X96 mm ② 0,140 Kg/0,0010 m³		Model	Installation		
		21W	Recessed		
			Finish	Code	€
			● White	324890	18
			● Black	323718	18
		TRIMLESS SQUARE FRAME			
 ① 68X68 mm ② 0,120 Kg/0,0005 m³		Model	Installation		
		13W	Recessed		
			Finish	Code	€
			● White	323558	18
 ① 96X96 mm ② 0,160 Kg/0,0008 m³		Model	Installation		
		21W	Recessed		
			Finish	Code	€
			● White	323732	35

SQUARE REFLECTOR		Required	
  0,030 Kg/0,0003 m³	Model	Installation	
	13W	Recessed	
	Finish		Code €
	 White		323633 8
	 Black		323657 8
	 Gold		323640 8
  0,050 Kg/0,0007 m³	Model	Installation	
	21W	Recessed	
	Finish		Code €
	 White		323800 12
	 Black		323817 12
	 Gold		323831 12





GAME



game trim round

IP20


UGR <19

LED COB | 50.000 h life



Light beam: ACCENT


Material: Aluminum



50 mm

0,200 Kg/0,0009 m³

Power	Installation		Beam	CRI	
5W	Recessed		36°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	650 lm	3000 K	 +  White	337142	35
On-Off	650 lm	3000 K	 +  Gold	349084	35




50 mm

0,200 Kg/0,0010 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	650 lm	3000 K	+ Black	349060	35
On-Off	650 lm	3000 K	+ Gold	349077	35

Photometry



m	lx	dm
1	1125	0,72
2	281	1,40
3	125	2,20
4	70	2,90
5	45	3,60




Driver

ON/OFF included





game trim round

IP20		UGR <19		LED COB 50.000 h life		Light beam: ACCENT		Material: Aluminum																													
 						Power		Installation		Beam		CRI																									
						11W		Recessed		36°		≥90																									
						Control		Lumen		CCT		Finish		Code		€																					
						On-Off		900 lm		2700 K		+ White		285429		45																					
						On-Off		950 lm		3000 K		+ White		192291		45																					
						On-Off		950 lm		3000 K		+ Black		192277		45																					
						On-Off		950 lm		3000 K		+ Gold		192307		45																					
						On-Off		1100 lm		4000 K		+ White		267975		45																					
						On-Off		1100 lm		4000 K		+ Gold		341361		45																					
						75 mm		0,350 Kg/0,0016 m³																													
 						Control		Lumen		CCT		Finish		Code		€																					
						On-Off		900 lm		2700 K		+ Black		285412		45																					
						On-Off		950 lm		3000 K		+ White		192338		45																					
						On-Off		950 lm		3000 K		+ Black		192314		45																					
						On-Off		950 lm		3000 K		+ Gold		192345		45																					
						On-Off		1100 lm		4000 K		+ Black		267968		45																					
						On-Off		1100 lm		4000 K		+ Gold		341354		45																					
						75 mm		0,350 Kg/0,0016 m³																													
												Photometry  <table><tr><td>m</td><td>lx</td><td>øm</td></tr><tr><td>1</td><td>1545</td><td>0,69</td></tr><tr><td>2</td><td>386</td><td>1,38</td></tr><tr><td>3</td><td>171</td><td>2,07</td></tr><tr><td>4</td><td>96</td><td>2,77</td></tr><tr><td>5</td><td>61</td><td>3,46</td></tr></table>								m	lx	øm	1	1545	0,69	2	386	1,38	3	171	2,07	4	96	2,77	5	61	3,46
						m	lx	øm																													
1	1545	0,69																																			
2	386	1,38																																			
3	171	2,07																																			
4	96	2,77																																			
5	61	3,46																																			
						Driver ON/OFF included																															
IP65		UGR <19		LED COB 50.000 h life		Light beam: ACCENT		Material: Aluminum																													
						Control		Lumen		CCT		Finish		Code		€																					
						On-Off		950 lm		3000 K		+ White		313191		75																					
						On-Off		950 lm		3000 K		+ Black		327754		75																					
						DIMMABLE DRIVER* - Optional																															
						Model		Power		Output		Measure (L x H x W)		Code		€																					
						1-10V/Push		20 W		250 mA		111 x 22 x 52 mm		217253		60																					
						DALI/Push		12 W		250 mA		132 x 20 x 30 mm		202396		60																					

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



game trim round


IP20

UGR <19

LED COB | 50.000 h life

Light beam: SPOT

Material: Aluminum




110 mm

0,660 Kg/0,0016 m³

Power	Installation	Beam	CRI
20W	Recessed	27°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2250 lm	3000 K	+ White	273174	90
On-Off	2250 lm	3000 K	+ Gold	341422	90




110 mm

0,660 Kg/0,0016 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	2250 lm	3000 K	+ Black	273167	90
On-Off	2250 lm	3000 K	+ Gold	341415	90

Photometry



m	lx	øm
1	8645	0.41
2	2161	0.83
3	961	1.20
4	540	1.70
5	346	2.10

Driver

ON/OFF included

game trim square



IP20




<19

LED COB | 50.000 h life



Light beam: ACCENT

Material: Aluminum




75X75 mm



0,310 Kg/0,0016 m³

Power	Installation	Beam	CRI
11W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	+ White	192376	50
On-Off	950 lm	3000 K	+ Black	192352	50




75x75 mm



0,310 Kg/0,0016 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	+ White	192406	50
On-Off	950 lm	3000 K	+ Black	192383	50

Photometry



m	lx	ø(m)
1	1545	0,69
2	386	1,38
3	171	2,07
4	96	2,77
5	61	3,46

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Model	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	250 mA	111 x 22 x 52 mm	217253	60
DALI/Push	12 W	250 mA	132 x 20 x 30 mm	202396	60

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.





game trimless


IP20

UGR<19

LED COB | 50.000 h life

Light beam: ACCENT

Material: Aluminum




①

75 mm

②

0,300 Kg/0,0012 m³

Power	Installation	Beam	CRI		
11W	Recessed	36°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	● White	319667	50
On-Off	950 lm	3000 K	● Black	319650	50



①


75X75 mm

②

0,300 Kg/0,0012 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	● White	319681	50
On-Off	950 lm	3000 K	● Black	319674	50

Photometry



m	lx	am
1	1609	0,60
2	402	1,20
3	179	1,80
4	101	2,40
5	64	3,00

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Model	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	250 mA	111 x 22 x 52 mm	217253	60
DALI/Push	12 W	250 mA	132 x 20 x 30 mm	202396	60



*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



TAG



tag



IP20

LED DOB | 30.000 h life



Light beam: ACCENT

Material: Aluminum



75 mm



0,140 Kg/0,0010 m³

Power	Installation	Beam	CRI		
7W	Recessed	50°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	740 lm	2700 K	White	344850	15
On-Off	740 lm	2700 K	Black	344843	15
On-Off	750 lm	3000 K	White	331263	15
On-Off	750 lm	3000 K	Black	331256	15
On-Off	800 lm	4000 K	White	344874	15
On-Off	800 lm	4000 K	Black	344867	15
Photometry			Driver		
			ON/OFF included		
m	lx	øm			
1	838	0,98			
2	209	2,00			
3	93	2,90			
4	52	3,90			
5	34	4,90			





QUARK



quark




IP20

LED SMD | 50.000 h life



Light beam: SPOT

Material: Aluminum



18 mm




0,020 Kg/0,0004 m³

Power	Installation	Beam	CRI
2,8W	Recessed	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	160 lm	3000 K	White	327471	30
On-Off	160 lm	3000 K	Black	305844	30


Photometry



m	lx	øm
1	368	0,39
2	92	0,77
3	41	1,20
4	23	1,50
5	15	1,90

Driver

ON/OFF included



25 mm




0,070 Kg/0,0004 m³

Power	Installation	Beam	CRI
3W	Recessed	25°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	230 lm	3000 K	White	327488	35
On-Off	230 lm	3000 K	Black	305851	35


Photometry



m	lx	øm
1	1220	0,35
2	305	0,70
3	136	1,00
4	76	1,40
5	49	1,70

Driver

ON/OFF included



35 mm




0,140 Kg/0,0005 m³

Power	Installation	Beam	CRI
5W	Recessed	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	510 lm	3000 K	White	307756	50
On-Off	510 lm	3000 K	Black	327495	50


Photometry



m	lx	øm
1	919	0,49
2	230	0,98
3	102	1,50
4	57	2,00
5	37	2,40

Driver

ON/OFF included

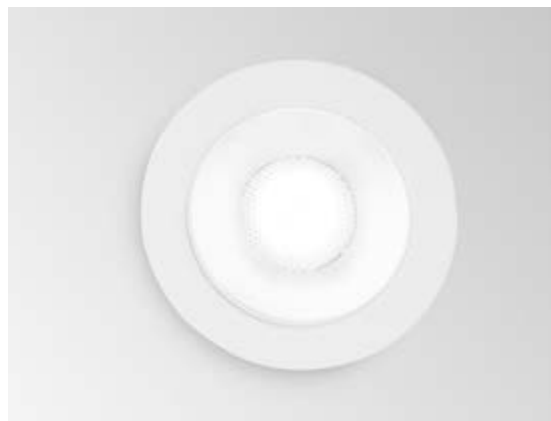






IP20

LED COB | 50.000 h life



Light beam: SPOT


Material: Aluminum



①
45 mm

②
0,190 Kg/0,0009 m³

Power	Installation	Beam	CRI		
9W	Recessed	25°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	● White	344836	55
On-Off	950 lm	3000 K	● Black	322889	55




③
20°

④
52 mm

⑤
0,210 Kg/0,0009 m³

Power	Installation	Beam	CRI		
9W	Recessed	25°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	● White	344829	60
On-Off	950 lm	3000 K	● Black	322971	60

Photometry



m	lx	øm
1	2780	0,48
2	690	0,97
3	306	1,46
4	172	1,95
5	110	2,92

Driver

ON/OFF included



322971




IP20

LED COB | 50.000 h life



Light beam: SPOT

Material: Aluminum




45 mm



0,190 Kg/0,0009 m³

Power	Installation		Beam	CRI	
12W	Recessed		25°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	● White	344812	60
On-Off	1200 lm	3000 K	● Black	322919	60



20°




52 mm



0,250 Kg/0,0009 m³

Power	Installation		Beam	CRI	
12W	Recessed		25°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	● White	344805	65
On-Off	1200 lm	3000 K	● Black	323008	65

Photometry



m	lx	dm
1	3914	0,49
2	978	0,96
3	434	1,44
4	244	1,92
5	156	2,40

Driver

ON/OFF included

322919



INFINITY





infinity trim




IP20

LED COB | 50.000 h life



Light beam: SPOT

Material: Aluminum




①
55 mm

②
0,140 Kg/0,0009 m³

Power	Installation		Beam	CRI	
7W	Recessed		28°	≥95	
Control	Lumen	CCT	Finish	Code	€
On-Off	530 lm	3000 K	● White	356105	26
On-Off	530 lm	3000 K	● Black	355702	26

Photometry




m	lx	øm
1	1362	0,44
2	340	0,88
3	151	1,30
4	85	1,80
5	54	2,20

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28




①
75 mm

②
0,350 Kg/0,0012 m³

Power	Installation		Beam	CRI	
12W	Recessed		36°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	● White	356112	28
On-Off	1050 lm	3000 K	● Black	368740	28

Photometry



m	lx	øm
1	2150	0,63
2	538	1,20
3	239	1,80
4	134	2,50
5	86	3,10

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28



infinity trimless



IP20

LED COB | 50.000 h life



Light beam: SPOT

Material: Aluminum



60 mm




0,170 Kg/0,0007 m³

Power	Installation	Beam	CRI
7W	Recessed	28°	≥95

Control	Lumen	CCT	Finish	Code	€
On-Off	530 lm	3000 K	White	356136	29
On-Off	530 lm	3000 K	Black	356129	29

Photometry



m	lx	øm
1	1362	0,44
2	340	0,88
3	151	1,30
4	85	1,80
5	54	2,20

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28



80 mm




0,380 Kg/0,0014 m³

Power	Installation	Beam	CRI
12W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	White	356143	32
On-Off	1050 lm	3000 K	Black	368764	32

Photometry



m	lx	øm
1	2150	0,63
2	538	1,20
3	239	1,80
4	134	2,50
5	86	3,10

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28

OFF



off




MacAdam: SDCM 3 | 50.000 h life



Light beam: WIDE

Material: Aluminum




①
100 mm

②
0,460 Kg/0,0022 m³

Power	Installation	Beam	CRI	Source
15W	Recessed	50°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	1300 lm	3000 K	White	266497	87
On-Off	1300 lm	3000 K	Black	266558	87
On-Off	1400 lm	4000 K	White	266503	87
On-Off	1400 lm	4000 K	Black	266565	87


Photometry



m	lx	øm
1	1688	0,93
2	422	1,90
3	188	2,80
4	105	3,70
5	68	4,60

Driver

ON/OFF included




①
150 mm

②
0,990 Kg/0,0046 m³

Power	Installation	Beam	CRI	Source
28W	Recessed	60°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	2650 lm	3000 K	White	266510	130
On-Off	2650 lm	3000 K	Black	266572	130
On-Off	3100 lm	4000 K	White	266527	130
On-Off	3100 lm	4000 K	Black	266589	130

Photometry



m	lx	øm
1	2457	1,30
2	614	2,50
3	273	3,80
4	154	5,10
5	98	6,40

Driver

ON/OFF included



Unmovable aluminum recessed fitting with round ring in three different dimensions, suitable for plasterboard ceilings installation.

Suited for OFFICES and MANAGERIAL environments and in general where computers are present and there is the necessity to guarantee a great glare control. The high color rendering level makes it ideal even for exhibiting spaces and for the enhancement of the products in a showroom and sales area of the RETAIL sector.





DEEP






IP20

LED SMD | 50.000 h life



Light beam: WIDE

Material: Aluminum




90 mm



0,280 Kg/0,0016 m³

Power	Installation	Beam	CRI		
10W	Recessed	70°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	1450 lm	3000 K	White	249018	35
On-Off	1600 lm	4000 K	White	249025	35
Photometry			Driver		
			ON/OFF included		




145 mm



0,360 Kg/0,0040 m³

Power	Installation	Beam	CRI		
20W	Recessed	77°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	3000 lm	3000 K	White	249032	70
On-Off	3300 lm	4000 K	White	249049	70
Photometry			Driver		
			ON/OFF included		



200 mm



0,650 Kg/0,0052 m³

Power	Installation	Beam	CRI		
30W	Recessed	77°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	4650 lm	3000 K	White	248783	90
On-Off	4850 lm	4000 K	White	248790	90
Photometry			Driver		
			ON/OFF included		

BASIC



basic wide



IP44

MacAdam: SDCM 3 | 30.000 h life



Light beam: WIDE

Material: Aluminum



90 mm




0,370 Kg/0,0017 m³

Power	Installation	Beam	CRI
10W	Recessed	85°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1100 lm	3000 K	White	193519	65

Photometry



m	lx	am
1	188	1,84
2	47	3,69
3	20	5,54
4	11	7,39
5	7	9,24

Driver

ON/OFF included



125 mm




0,630 Kg/0,0027 m³

Power	Installation	Beam	CRI
15W	Recessed	87°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1550 lm	3000 K	White	193526	80

Photometry



m	lx	am
1	318	1,72
2	79	3,44
3	35	5,17
4	19	6,89
5	12	8,61


Driver

ON/OFF included

Power	Installation	Beam	CRI
20W	Recessed	87°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2150 lm	3000 K	White	193533	85

Photometry





m	lx	am
1	876	2,00
2	219	3,90
3	97	5,90
4	55	7,80
5	35	9,80

Driver

ON/OFF included

Die-cast aluminum recessed spotlight
with round seal. Suitable for the installation
on plasterboard ceiling.

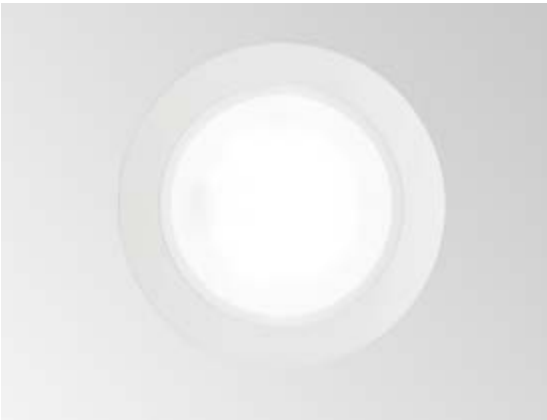

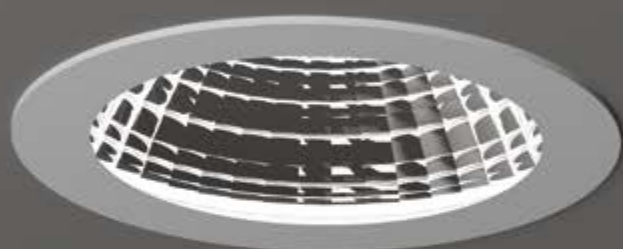



basic accent

IP44

MacAdam: SDCM 3 | 30.000 h life

Light beam: ACCENT

Material: Aluminum




90 mm

0,400 Kg/0,0017 m³

Power	Installation	Beam	CRI
10,5W	Recessed	45°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	White	193458	68


Photometry



m	lx	øm
1	533	0,81
2	133	1,62
3	59	2,44
4	33	3,25
5	21	4,07

Driver

ON/OFF included




125 mm

0,660 Kg/0,0027 m³

Power	Installation	Beam	CRI
15W	Recessed	52°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1450 lm	3000 K	White	193465	85

Photometry



m	lx	øm
1	719	0,98
2	179	1,96
3	79	2,95
4	44	3,93
5	28	4,92


Driver

ON/OFF included

Power	Installation	Beam	CRI
20W	Recessed	52°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1950 lm	3000 K	White	193472	90

Photometry




m	lx	øm
1	1779	0,76
2	445	1,50
3	198	2,30
4	111	3,10
5	71	3,80

Driver

ON/OFF included

GROOVE

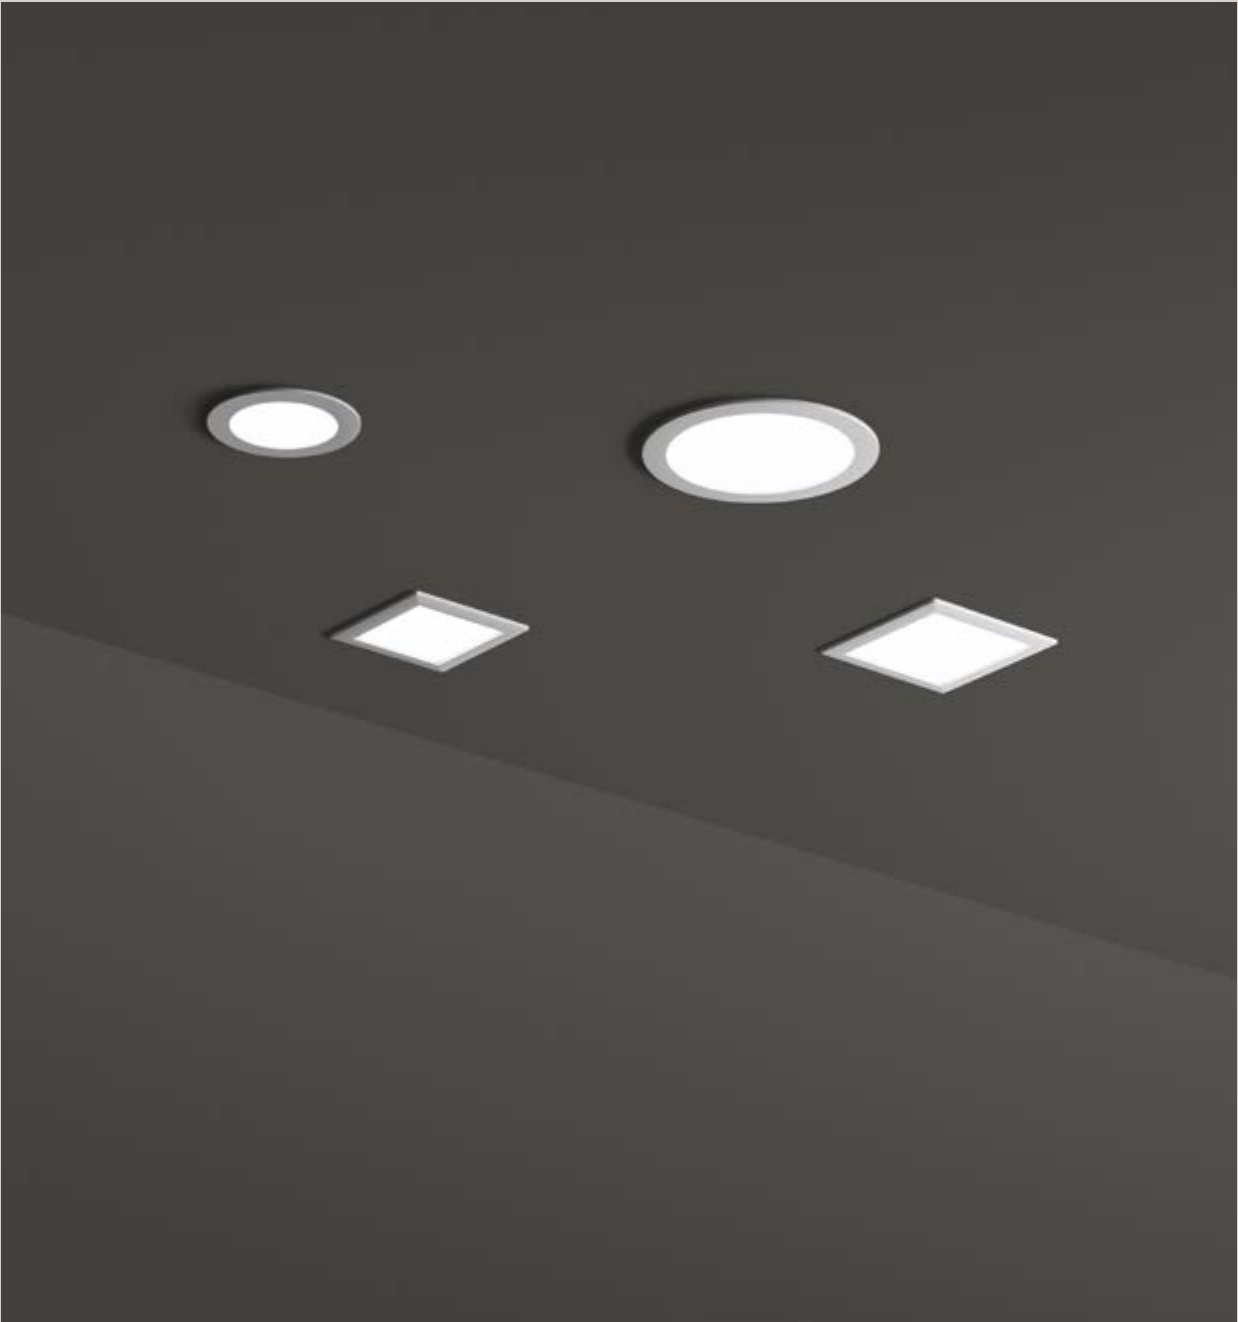

groove




IP40

30.000 h life



Light beam: WIDE

Material: Aluminum



100 mm



0,220 Kg/0,0012 m³

Power

Installation

Beam

CRI

Source

10W

Recessed

110°

≥80

LED SMD

Lumen

CCT

Finish

Code

€

1250 lm

3000 K

White

123974

29

1350 lm


4000 K

White

147666

29


Photometry



m	lx	øm
1	247	2,80
2	62	5,60
3	27	8,50
4	15	11,00
5	9,9	14,00

Driver

included



150 mm



0,410 Kg/0,0024 m³

Power

Installation

Beam

CRI

Source

20W

Recessed

110°

≥80

LED SMD

Lumen

CCT

Finish

Code

€

2600 lm

3000 K

White

123998

35

2700 lm


4000 K

White

147673

35


Photometry



m	lx	øm
1	512	2,80
2	128	5,60
3	57	8,50
4	32	11,00
5	20	14,00

Driver

included



205 mm



0,660 Kg/0,0036 m³

Power

Installation

Beam

CRI

Source

30W

Recessed

110°

≥80

LED SMD

Lumen

CCT

Finish

Code

€

3800 lm

3000 K

White

124018

46

4050 lm


4000 K

White

147680

46

Photometry



m	lx	øm
1	802	2,80
2	200	5,60
3	89	8,50
4	50	11,00
5	32	14,00

Driver

included





10W
Ø118



20W
Ø168



30W
Ø227



30W
205



20W
150



10W
100




IP40

30.000 h life

Light beam: WIDE

Material: Aluminum



100X100 mm




0,270 Kg/0,0012 m³

Power	Installation	Beam	CRI	Source
10W	Recessed	110°	≥80	LED SMD

Lumen	CCT	Finish	Code	€
1200 lm	3000 K	White	123981	30


Photometry



m	lx	ø(m)
1	251	2,80
2	63	5,60
3	28	8,50
4	16	11,00
5	10	14,00

Driver

Included



150X150 mm




0,540 Kg/0,0022 m³

Power	Installation	Beam	CRI	Source
20W	Recessed	110°	≥80	LED SMD

Lumen	CCT	Finish	Code	€
2450 lm	3000 K	Bianco	124001	36


Photometry



m	lx	ø(m)
1	530	2,80
2	132	5,60
3	59	8,50
4	33	11,00
5	21	14,00

Driver

Included



205X205 mm




0,850 Kg/0,0036 m³

Power	Installation	Beam	CRI	Source
30W	Recessed	110°	≥80	LED SMD

Lumen	CCT	Finish	Code	€
3900 lm	3000 K	Bianco	124025	49

Photometry



m	lx	ø(m)
1	795	2,80
2	199	5,60
3	88	8,50
4	50	11,00
5	32	14,00

Driver

Included

PLAY



play

IP20

LED COB | 50.000 h life

Light beam: SPOT


Material: Aluminum



Power	Installation	Beam	CRI
7W	Recessed	16°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	520 lm	3000 K	White	258270	61
On-Off	520 lm	3000 K	Black	268088	61
On-Off	560 lm	4000 K	White	364766	61
On-Off	560 lm	4000 K	Black	370835	61

Photometry




m	lx	øm
1	2632	0,31
2	658	0,63
3	292	0,94
4	164	1,30
5	105	1,60

Driver

ON/OFF included


90°	355°	45 mm	0,220 Kg 0,0010 m³
-----	------	-------	-----------------------



Power	Installation	Beam	CRI
13W	Recessed	18°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	White	364674	64
On-Off	900 lm	3000 K	Black	364667	64
On-Off	1050 lm	4000 K	White	370880	64
On-Off	1050 lm	4000 K	Black	370866	64

Photometry



m	lx	øm
1	7506	0,25
2	1876	0,50
3	834	0,75
4	469	1,00
5	300	1,20

Driver

ON/OFF included

90°	355°	45 mm	0,240 Kg 0,0010 m³
-----	------	-------	-----------------------

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
DALI/Push	7 W	150 mA	142 x 20 x 22 mm	370736	50
DALI/Push	12 W	300 mA	85 x 21 x 40 mm	370804	55

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

BEYOND



IP40		MacAdam: SDCM 3 50.000 h life		Light beam: SPOT		Source: LED COB		Material: Aluminum							
126 30				Power		Installation		Beam		CRI					
				7W		Recessed		36°		≥90					
				Control		Lumen		CCT		Finish		Code		€	
				On-Off		700 lm		3000 K		White		355894		65	
				On-Off		700 lm		3000 K		Black		355887		65	
30° 0,070 Kg 0,0004 m³				Photometry						Driver					
				m lx øm 1 1152 0,66 2 288 1,30 3 128 2,00 4 72 2,60 5 46 3,30						ON/OFF included					
FRAME TRIM - Required															
36 47 48						Finish		Code		€					
						White		355863		23					
						Black		355856		23					
40 mm 0,080 Kg/0,0017 m³															
FRAME TRIMLESS - Required															
36 47 65						Finish		Code		€					
						White		355849		23					
40 mm 0,080 Kg/0,0017 m³															
FRAME GYPSUM - Required															
70 43 114 80						Finish		Code		€					
						White		355870		37					
80 mm 0,150 Kg/0,0031 m³															



355863



355849



355870



IP40

MacAdam: SDCM 3 | 50.000 h life

Light beam: SPOT

Source: LED COB

Material: Aluminum




30°
0,230 Kg 0,0063 m³

Power	Installation	Beam	CRI
10W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	355986	111
On-Off	950 lm	3000 K	Black	355979	111

Photometry




m	lx	øm
1	1971	0,65
2	493	1,30
3	219	1,90
4	123	2,60
5	79	3,20

Driver

ON/OFF included


FRAME TRIM SINGLE - Required



75 mm
0,120 Kg/0,0040 m³

Finish	Code	€
White	370064	29
Black	355900	29


FRAME TRIM TWIN - Required

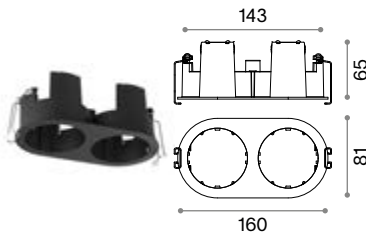

147X75 mm
0,430 Kg/0,0056 m³

Finish	Code	€
White	355931	57
Black	370026	57

FRAME TRIMLESS - Required



105 mm
0,240 Kg/0,0044 m³

Finish	Code	€
White	355948	37

NOVA



nova



IP20




<19

LED COB | 50.000 h life



Light beam: ACCENT


Material: Aluminum



Power	Installation	Beam	CRI
6W	Recessed	28°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	530 lm	3000 K	White	364339	80
On-Off	530 lm	3000 K	Black	364360	80
On-Off	590 lm	4000 K	White	364353	80
On-Off	590 lm	4000 K	Black	370132	80

Photometry



m	lx	øm
1	1640	0,48
2	410	0,96
3	182	1,40
4	103	1,90
5	66	2,40

Driver

ON/OFF included



90°



360°



55 mm

0,250 Kg
0,0010 m³

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	12 W	150 mA	135 x 20 x 30 mm	370040	50
DALI/Push	8 W	150 mA	119 x 20 x 22 mm	364384	55



IP20




<19

LED COB | 50.000 h life



Light beam: ACCENT


Material: Aluminum



Power	Installation	Beam	CRI
12W	Recessed	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1300 lm	3000 K	White	248165	85
On-Off	1300 lm	3000 K	Black	248189	85
On-Off	1400 lm	4000 K	White	267937	85
On-Off	1400 lm	4000 K	Black	267920	85

Photometry



m	lx	øm
1	1768	0,66
2	442	1,32
3	196	1,97
4	111	2,63
5	71	3,29

Driver

ON/OFF included



90°



360°



90 mm


0,554 Kg
0,0016 m³

DIMMABLE DRIVER* - Optional



Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	15 W	300 mA	111 x 22 x 52 mm	243993	60
DALI/Push	12 W	300 mA	132 x 20 x 30 mm	243986	65



*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



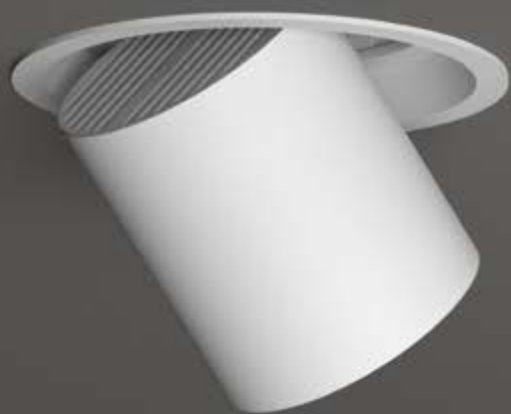




 IP20		LED COB 50.000 h life		 Light beam: ACCENT		Material: Aluminum									
 				Power		Installation		Beam		CRI					
				20W		Recessed		56°		≥90					
				Control		Lumen		CCT		Finish		Code		€	
				On-Off		1950 lm		3000 K		 White		364407		113	
				On-Off		1950 lm		3000 K		 Black		364438		113	
				On-Off		2100 lm		4000 K		 White		364421		113	
On-Off		2100 lm		4000 K		 Black		370187		113					
 90°  360°  140 mm  1,200 Kg 0,0045 m³				Photometry						Driver					
				 						ON/OFF included					
												DIMMABLE DRIVER* - Optional			

 IP20		 <22		LED COB 50.000 h life		 Light beam: ACCENT		Material: Aluminum																	
						Power		Installation		Beam		CRI													
						30W		Recessed		38°		≥90													
						Control		Lumen		CCT		Finish		Code		€									
						On-Off		3000 lm		3000 K		 White		248172		125									
On-Off		3000 lm		3000 K		 Black		248196		125															
On-Off		3300 lm		4000 K		 White		267951		125															
On-Off		3300 lm		4000 K		 Black		267944		125															
 90° 360° 140 mm 1,160 Kg 0,0039 m³ Photometry<table><thead><tr><th>m</th><th>lx</th><th>°m</th></tr></thead><tbody><tr><td>1</td><td>4671</td><td>0,64</td></tr><tr><td>2</td><td>1168</td><td>1,28</td></tr><tr><td>3</td><td>519</td><td>1,93</td></tr><tr><td>4</td><td>292</td><td>2,57</td></tr><tr><td>5</td><td>187</td><td>3,21</td></tr></tbody></table>						m	lx	°m	1	4671	0,64	2	1168	1,28	3	519	1,93	4	292	2,57	5	187	3,21	Driver	
						m	lx	°m																	
						1	4671	0,64																	
2	1168	1,28																							
3	519	1,93																							
4	292	2,57																							
5	187	3,21																							
ON/OFF included																									
DIMMABLE DRIVER* - Optional																									
Control		Power		Output		Measure (L x H x W)		Code		€															
1-10V/Push		36 W		700 mA		167 x 32 x 41 mm		248370		105															
DALI/Push		36 W		700 mA		135 x 24 x 72 mm		248592		110															

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

LED PANEL

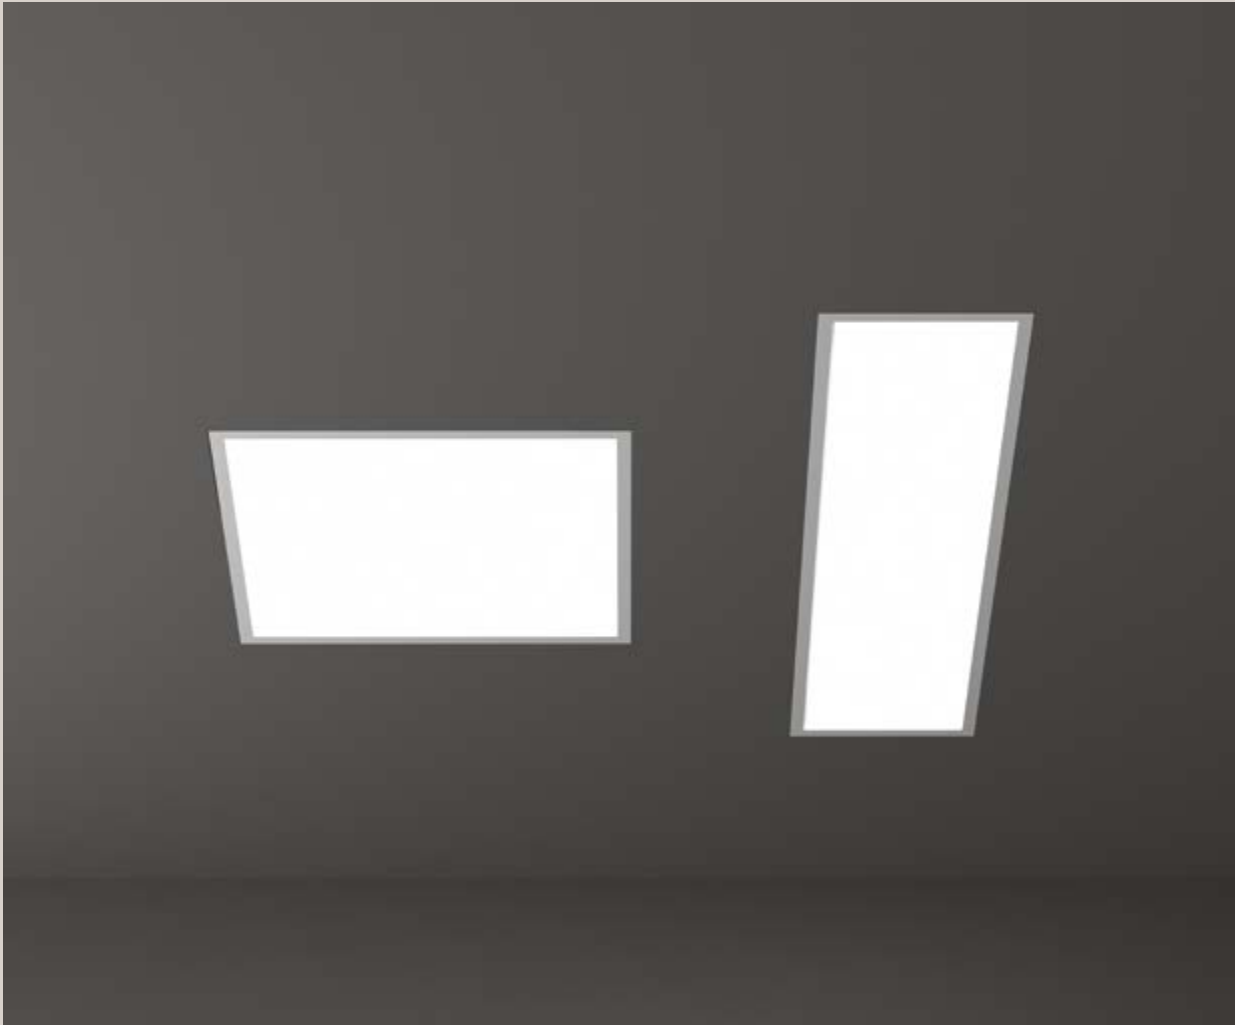

led panel


IP20

UGR <19

LED SMD | 30.000 h life

Light beam: WIDE

Material: Aluminum




1,560 Kg/0,0164 m³

Power	Installation	Beam	CRI
31W	Recessed	90°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	4550 lm	3000 K	White	363981	35
On-Off	4750 lm	4000 K	White	363974	35

Photometry



m	lx	øm
1	1632	1.90
2	408	3.90
3	181	5.80
4	102	7.80
5	65	9.70

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	31 W	750 mA	50 x 30 x 142 mm	364025	28
DALI/Push	31 W	750 mA	70 x 30 x 106 mm	364018	61


IP20

UGR <19

LED SMD | 30.000 h life

Light beam: WIDE

Material: Aluminum



2,200 Kg/0,0144 m³


Power	Installation	Min Qty.	Beam	CRI
40W	Recessed	2 pieces	90°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	6000 lm	3000 K	White	246390	37
On-Off	6450 lm	4000 K	White	244181	37

Power	Installation	Min Qty.	Beam	CRI
40W	Recessed	2 pieces	90°	≥80

Control	Lumen	CCT	Finish	Code	€
On-Off	6700 lm	3000 K	White	249711	37
On-Off	7250 lm	4000 K	White	249728	37

Photometry



m	lx	øm
1	1798	2.00
2	450	3.90
3	200	5.90
4	112	7.90
5	72	9.80

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	42 W	1000 mA	125 x 26 x 83 mm	247854	29
DALI/Push	45 W	1000 mA	106 x 28 x 69 mm	247847	72

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

SUSPENSION KIT



Required	Cables	Cables lenght	Code	€
No	4	1000 mm	244198	10

RECESSED MOUNTING KIT



Required	Code	€
No	244204	10

RECESSED FRAME



Required	Code	€
No	267692	20

①
607X607 mm



led panel


IP20

UGR <19

LED SMD | 50.000 h life

Light beam: WIDE

Material: Aluminum



1,600 Kg/0,0159 m³

Power	Installation			Beam	CRI																		
40W	Recessed			90°	≥90																		
Control	Lumen	CCT	Finish	Code	€																		
On-Off	6950 lm	3000 K	 White	363998	42																		
On-Off	6700 lm	4000 K	 White	364001	42																		
Photometry			Driver																				
			ON/OFF included																				
<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>1769</td><td>2,10</td></tr><tr><td>2</td><td>442</td><td>4,30</td></tr><tr><td>3</td><td>197</td><td>6,40</td></tr><tr><td>4</td><td>111</td><td>8,50</td></tr><tr><td>5</td><td>71</td><td>11,00</td></tr></table>			m	lx	øm	1	1769	2,10	2	442	4,30	3	197	6,40	4	111	8,50	5	71	11,00			
m	lx	øm																					
1	1769	2,10																					
2	442	4,30																					
3	197	6,40																					
4	111	8,50																					
5	71	11,00																					
DIMMABLE DRIVER* - Optional																							
Control	Power	Output	Measure (L x H x W)	Code	€																		
1-10V	42 W	1000 mA	125 x 26 x 83 mm	247854	29																		
DALI/Push	45 W	1000 mA	106 x 28 x 69 mm	247847	72																		

SUSPENSION KIT



Required	Cables	Cables lenght	Code	€
No	4	1000 mm	244198	10

RECESSED MOUNTING KIT



Required	Code	€
No	244204	10

RECESSED FRAME



327X1227 mm

Required	Code	€
No	377773	23



LIKA



lika trim



IP20




<16

LED SMD | 50.000 h life



Light beam: ACCENT

Material: Aluminum




68X37 mm



0,130 Kg/0,0009 m³

Power	Installation		Beam	CRI	
6W	Recessed		29°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	400 lm	3000 K	 +  Black	206196	45
On-Off	460 lm	4000 K	 +  Black	267869	45


Photometry



m	lx	øm
1	2331	0,51
2	583	1,00
3	259	1,50
4	146	2,00
5	93	2,50

Driver

ON/OFF included




100X38 mm



0,250 Kg/0,0129 m³

Power	Installation		Beam	CRI	
8W	Recessed		29°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	500 lm	3000 K	 +  Black	367309	58
On-Off	540 lm	4000 K	 +  Black	367316	58

Photometry



m	lx	øm
1	1419	0,51
2	355	1,00
3	158	1,50
4	89	2,00
5	57	2,50

Driver

ON/OFF included

lika trim



IP20




<16

LED SMD | 50.000 h life



Light beam: ACCENT

Material: Aluminum




①
140X37 mm

②
0,320 Kg/0,0014 m³

Power	Installation	Beam	CRI
12W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	3000 K	+ ● Black	206219	70
On-Off	1150 lm	4000 K	+ ● Black	267876	70


Photometry



m	lx	øm
1	2331	0,51
2	583	1,00
3	259	1,50
4	146	2,00
5	93	2,50

Driver

ON/OFF included




①
273X37 mm

②
0,480 Kg/0,0022 m³

Power	Installation	Beam	CRI
20W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	+ ● Black	206233	110
On-Off	2250 lm	4000 K	+ ● Black	267883	110

Photometry



m	lx	øm
1	4696	0,51
2	1174	1,00
3	522	1,50
4	294	2,00
5	188	2,50

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional






Model	Control	Power	Output	Measure (L x H x W)	Code	€
6/8/12 W	DALI	12 W	700 mA	132 x 20 x 30 mm	267982	56
20 W	DALI/Push	25 W	600 mA	135 x 24 x 72 mm	268002	75

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.





lika trimless

 IP20		 <16	LED SMD 50.000 h life		 Light beam: ACCENT	Material: Aluminum																
   70			Power	Installation	Beam	CRI																
			6W	Recessed	29°	≥90																
			Control	Lumen	CCT	Finish	Code	€														
			On-Off	400 lm	3000 K	● Black	206202	60														
			On-Off	460 lm	4000 K	● Black	267890	60														
 75X70 mm  0,220 Kg/0,0009 m³			Photometry		Driver																	
					ON/OFF included																	
			<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>946</td><td>0,51</td></tr><tr><td>2</td><td>237</td><td>1,00</td></tr><tr><td>3</td><td>105</td><td>1,50</td></tr><tr><td>4</td><td>59</td><td>2,00</td></tr><tr><td>5</td><td>38</td><td>2,50</td></tr></table>		m	lx	øm	1	946	0,51	2	237	1,00	3	105	1,50	4	59	2,00	5	38	2,50
m	lx	øm																				
1	946	0,51																				
2	237	1,00																				
3	105	1,50																				
4	59	2,00																				
5	38	2,50																				
   114			Power	Installation	Beam	CRI																
			8W	Recessed	29°	≥90																
			Control	Lumen	CCT	Finish	Code	€														
			On-Off	500 lm	3000 K	● + ● Black	367347	75														
			On-Off	540 lm	4000 K	● + ● Black	369747	75														
 105X70 mm  0,360 Kg/0,0129 m³			Photometry		Driver																	
					ON/OFF included																	
			<table><tr><th>m</th><th>lx</th><th>øm</th></tr><tr><td>1</td><td>1419</td><td>0,51</td></tr><tr><td>2</td><td>355</td><td>1,00</td></tr><tr><td>3</td><td>158</td><td>1,50</td></tr><tr><td>4</td><td>89</td><td>2,00</td></tr><tr><td>5</td><td>57</td><td>2,50</td></tr></table>		m	lx	øm	1	1419	0,51	2	355	1,00	3	158	1,50	4	89	2,00	5	57	2,50
m	lx	øm																				
1	1419	0,51																				
2	355	1,00																				
3	158	1,50																				
4	89	2,00																				
5	57	2,50																				



lika trimless



IP20




<16

LED SMD | 50.000 h life



Light beam: ACCENT

Material: Aluminum




145X70 mm




0,390 Kg/0,0014 m³

Power	Installation	Beam	CRI
12W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	3000 K	● Black	206226	95
On-Off	1150 lm	4000 K	● Black	267906	95

Photometry	Driver
	ON/OFF included




278X70 mm



0,720 Kg/0,0022 m³

Power	Installation	Beam	CRI
20W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	● Black	206240	150
On-Off	2250 lm	4000 K	● Black	267913	150

Photometry			Driver	
			ON/OFF included	
m	lx	øm		
1	4696	0,51		
2	1174	1,00		
3	522	1,50		
4	294	2,00		
5	188	2,50		

DIMMABLE DRIVER* - Optional

Model	Control	Power	Output	Measure (L x H x W)	Code	€
6/8/12 W	DALI	12 W	700 mA	132 x 20 x 30 mm	267982	56
20 W	DALI/Push	25 W	600 mA	135 x 24 x 72 mm	268002	75

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



IP20



<16

LED SMD | 50.000 h life



Light beam: ACCENT

Material: Aluminum




①


60X60 mm



0,200 Kg/0,0011 m³

Power	Installation	Beam	CRI		
10W	Recessed	32°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	● White	367286	98
On-Off	1050 lm	3000 K	● Black	369518	98

Photometry	Driver																		
	ON/OFF included																		
<table><tr><th>m</th><th>lx</th><th>°m</th></tr><tr><td>1</td><td>1958</td><td>0.55</td></tr><tr><td>2</td><td>489</td><td>1.10</td></tr><tr><td>3</td><td>218</td><td>1.70</td></tr><tr><td>4</td><td>122</td><td>2.20</td></tr><tr><td>5</td><td>78</td><td>2.80</td></tr></table>	m	lx	°m	1	1958	0.55	2	489	1.10	3	218	1.70	4	122	2.20	5	78	2.80	
m	lx	°m																	
1	1958	0.55																	
2	489	1.10																	
3	218	1.70																	
4	122	2.20																	
5	78	2.80																	



m	lx	øm
1	1958	0,55
2	489	1,10
3	218	1,70
4	122	2,20
5	78	2,80




①


117X23 mm



0,180 Kg/0,0014 m³

Power	Installation	Beam	CRI		
10W	Recessed	32°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	3000 K	● White	327501	66
On-Off	1000 lm	3000 K	● Black	305813	66

Photometry			Driver
			ON/OFF included
m	lx	candle	
1	1958	0,55	
2	489	1,10	
3	218	1,70	
4	122	2,20	
5	78	2,80	



m	lx	øm
1	1958	0,55
2	489	1,10
3	218	1,70
4	122	2,20
5	78	2,80



①


231X23 mm



0,300 Kg/0,0022 m³

Power	Installation	Beam	CRI		
20W	Recessed	32°	≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	● White	327518	110
On-Off	2000 lm	3000 K	● Black	305837	110

Photometry			Driver
			ON/OFF included
m	lx	°m	
1	4174	0,55	
2	1043	1,10	
3	464	1,70	
4	261	2,20	
5	167	2,80	



m	lx	øm
1	4174	0,55
2	1043	1,10
3	464	1,70
4	261	2,20
5	167	2,80

Recessed LED spotlight in black or white painted die-cast aluminium, with black polycarbonate reflector. Available in a range from 2 to 10 lights, in TRIMLESS versions with concealed recessed edge for installation on plasterboard ceilings, or in TRIM and SLIM versions with frame for installation on panels or ceilings.



367286





305813





lika wallwasher

 IP20		 <16		LED SMD 50.000 h life		 Light beam: ACCENT		Material: Aluminum					
   140X38 mm  0,310 Kg/0,0129 m³				Power		Installation		Beam		CRI			
				12,5W		Recessed		-		≥90			
				Control		Lumen		CCT		Finish		Code	
				On-Off		800 lm		3000 K		 White		367323	
				Photometry				Driver					
								ON/OFF included					
				DIMMABLE DRIVER* - Optional									
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA		132 x 20 x 30 mm			
				Control		Power		Output		Measure (L x H x W)			
				DALI		10 W		700 mA					







IP20




<16

LED SMD | 50.000 h life




Light beam: ACCENT

Material: Aluminum




0,200 Kg/0,0004 m³

Power	Installation	CRI			
6W	Ceiling	≥90			
Control	Lumen	CCT	Finish	Code	€
On-Off	330 lm	3000 K	White	367354	59
On-Off	330 lm	3000 K	Black	369877	59



0,370 Kg/0,0011 m³

Power	Installation	CRI			
12,5W	Ceiling	≥90			
Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	White	248530	90
On-Off	1200 lm	3000 K	Black	244884	90




0,720 Kg/0,0019 m³

Power	Installation	CRI			
21W	Ceiling	≥90			
Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	White	367361	124
On-Off	1400 lm	3000 K	Black	369945	124



Family of rectangular LED modules in die-cast aluminium, painted black or white polycarbonate reflector. Modules available with five lenses. Specially designed to prevent glare, it is best suited for use in OFFICES and COMMERCIAL spaces.

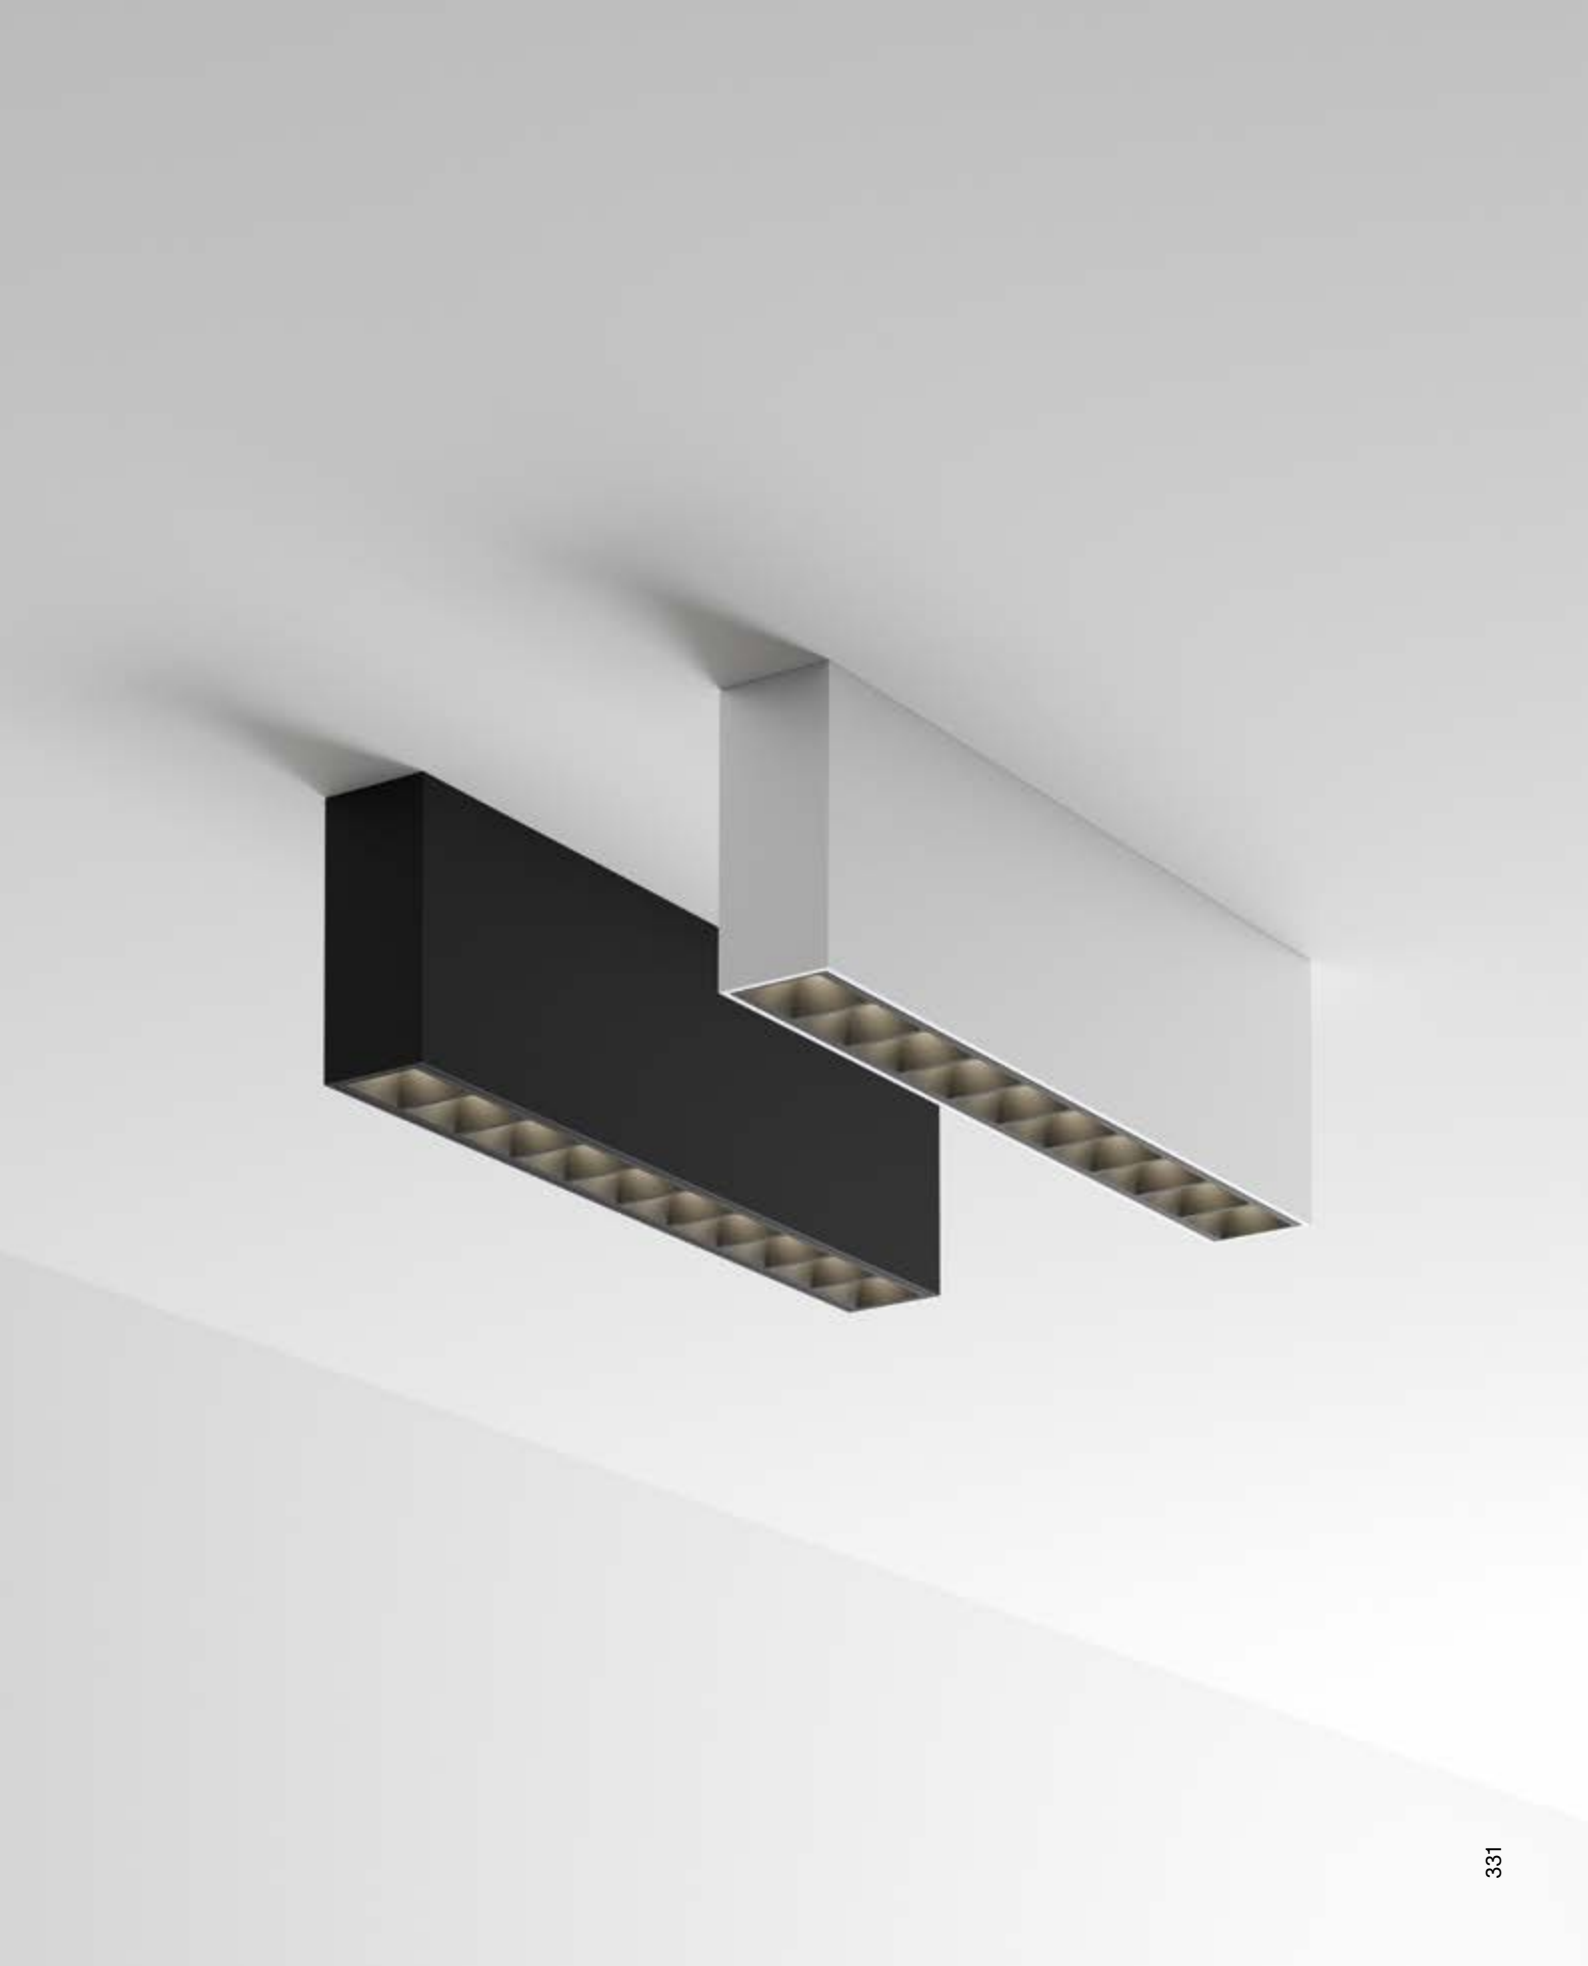


ZEPHYR



zephyr



IP20




123X123 mm



0,880 Kg/0,0023 m³

Power		Installation	
35W max		Recessed	
Finish		Code	€
White		150284	11
Recommended bulb GU10 - not included			
Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50



20°



110°




207X207 mm



1,350 Kg
0,0063 m³


Power		Installation	
35W max		Recessed	
Finish		Code	€
White		155722	30
Recommended bulb GU10 - not included			
Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

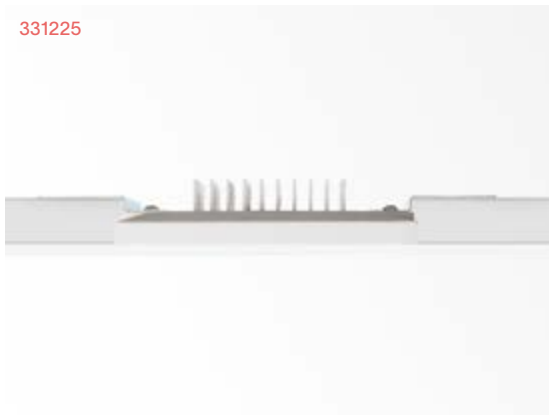

IP20



LED COB | 50.000 h life



141X141 mm




0,920 Kg/0,0036 m³

Power	Installation	CRI
12W	Recessed	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	White	331225	75


Photometry



m	lx	ø(m)
1	1596	1,10
2	399	2,20
3	177	3,20
4	100	4,30
5	64	5,40

Driver

ON/OFF included



141X241 mm




1,180 Kg/0,0063 m³

Power	Installation	CRI
24W	Recessed	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2400 lm	3000 K	White	361307	145

Photometry



m	lx	ø(m)
1	1596	1,10
2	399	2,20
3	177	3,20
4	100	4,30
5	64	5,40

Driver

ON/OFF included

DIMMABLE DRIVER*

Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	15 W	300 mA	125 x 26 x 45 mm	376820	31
DALI/Push	21 W	300 mA	97 x 33 x 44 mm	376837	59


*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

SAMBA




samba

IP20




① 83X83 mm
0,360 Kg/0,0016 m³

Power		Installation	
35W max		Recessed	
Finish		Code	€
White		230580	8
Recommended bulb GU10 - not included			
Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50




① 103 mm
0,240 Kg/0,0011 m³

Power		Installation	
35W max		Recessed	
Finish		Code	€
White		150307	9
Recommended bulb GU10 - not included			
Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50



① 125 mm
0,450 Kg/0,0032 m³

Power		Installation	
35W max		Recessed	
Finish		Code	€
White		150130	10
Recommended bulb GU10 - not included			
Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50





① 123 mm
0,420 Kg/0,0017 m³


Power		Installation	
50W max		Recessed	
Finish		Code	€
White		139012	11
Recommended bulb GU10 - not included			
Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50






	① 83X83 mm ⬜ 0,330 Kg/0,0018 m³	Power	Installation		
		35W max	Recessed		
		Finish	Code	€	
		White	229997	9	
		Recommended bulb GU10 - not included			
Lumen	CCT	Code	€		
410 lm	3000 K	108292	2,50		

	① 103X103 mm ⬜ 0,330 Kg/0,0020 m³	Power	Installation		
		35W max	Recessed		
		Finish	Code	€	
		White	150291	10	
		Recommended bulb GU10 - not included			
Lumen	CCT	Code	€		
410 lm	3000 K	108292	2,50		

	① 123X123 mm ⬜ 0,600 Kg/0,0017 m³	Power	Installation	Glass diffuser		
		35W max	Recessed			
		Finish	Code	€		
		White	150116	12		
		Recommended bulb GU10 - not included				
Lumen	CCT	Code	€			
410 lm	3000 K	108292	2,50			

	① 123X123 mm ⬜ 0,430 Kg/0,0017 m³	Power	Installation		
		50W max	Recessed		
		Finish	Code	€	
		White	139029	11	
		Recommended bulb GU10 - not included			
Lumen	CCT	Code	€		
410 lm	3000 K	108292	2,50		

WALKY



walky



IP20


LED SMD | 50.000 h life



Light beam: ASYMMETRICAL



Material: Gypsum



100X100 mm




0,580 Kg/0,0033 m³

Power	Installation	Beam	CRI
1W	Recessed	-	≥90


Control	Lumen	CCT	Finish	Code	€
On-Off	55 lm	3000 K	White	249834	47

Photometry



Driver

Included



81X166mm




0,580 Kg/0,0027 m³

Power	Installation	Beam	CRI
1W	Recessed	-	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	55 lm	3000 K	White	249827	47

Photometry




Driver

Included

JAZZ



jazz

 IP20		 Material: Zinc			
 		Power	Installation	Min Qty.	
		50W max	Recessed	3 pieces	
		Finish		Code	€
		 White	083117	7	
		 Ant. Brass	083124	7	
		 Chrome	083070	7	
		 Black	243818	7	
		 Nickel	083087	7	
		Recommended bulb GU10 - not included			
		Lumen		CCT	Code
410 lm		3000 K	108292	2,50	

 60 mm	 0,110 Kg/0,0018 m³
--	---

SWING




swing



IP20

Material: Zinc

SWING



Power	Installation	Min Qty.	
28W max	Recessed	3 pieces	
	Finish	Code	€
	 White	083179	10
	 Ant. Brass	083186	10
	 Chrome	083131	10
	 Black	243825	10
	 Nickel	083148	10
Recommended bulb GU10 - not included			
Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

45°	70 mm	0,200 Kg/0,0020 m³

ROOM-65





Glass diffuser

IDEAL LUX
TECHNICAL

room-65




IP65

LED COB | 50.000 h life



Light beam: ACCENT

Material: Aluminum



68 mm




0,220 Kg/0,0013 m³

Power	Installation	Beam	CRI
7,5W	Recessed	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	750 lm	3000 K	 White	252025	77
On-Off	750 lm	3000 K	 Black	252032	77


Photometry



m	lx	øm
1	1067	0,66
2	267	1,30
3	119	2,00
4	67	2,60
5	43	3,30

Driver

ON/OFF included




68 mm



0,240 Kg/0,0018 m³

Power	Installation		Beam	CRI	
7,5W	Recessed		38°	≥90	
Control	Lumen	CCT	Finish	Code	€
On-Off	750 lm	3000 K	● White	252049	77
On-Off	750 lm	3000 K	● Black	252056	77

Photometry



m	lx	øm
1	1067	0,66
2	267	1,30
3	119	2,00
4	67	2,60
5	43	3,30

Driver

ON/OFF included

ROOM-65

Sole	350, 468	Atom	414	Boeing	502
Luna	352, 472	Post-It	418	Atena	508
Snow	354, 444	Up	420	Edo	510
Clio	356, 447, 519	Argo	422	Torre	514
Techo	358	Tetris	424	Cosmo	516
Gun	360, 398	Twin	428	Thor	520, 552
Urano	362	Andromeda	430	Starlight	526
Bubble	364, 442	Giove	432	Koala	530
Mib	366	Felix	434	Ulex	534
Fiesta	368	Rex	436	Inside	546
O-Zone	370, 524	Polar	440	Bit	548
Omega	372	Down	448	Wire	550
Elio	376, 542	Febe	450	Floor	554
Litio	378, 544	Dedra	452	Taurus	556
Terra	380, 540	Pure	454	Park	560
Gas	382, 490	Cute	458	Way	564
Xeno	384	Lolita	462	Rocket	568
Swipe	386	Twiggy	464		
Style	388, 480	Doris	466		
Tronco	390, 506	Sasso	474		
Etere	392, 512	Agos	476		
Snif	394	Titano	484		
Keope	396	Kurt	486		
Punto	400	Tesla	488		
Toffee	404, 456	Hub	492		
Linea	406	Tifone	494		
Iko	410	Vega	496		
Sirio	412, 482, 538	Jedi	498		

OUT

DO

OR




SOLE



sole

IP44



2,970 Kg / 0,1379 m³


Installation

Suspension

Finish	Code	€
White	136011	180

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




1,690 Kg / 0,0723 m³

Finish	Code	€
White	136004	110

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




1,360 Kg / 0,0338 m³

Finish	Code	€
White	135991	95

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



1,300 Kg / 0,0101 m³

Finish	Code	€
White	318837	90

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

LUNA




Turned die-cast aluminium body with powder coating. Opal color plastic diffuser.

IDEAL LUX


OUTDOOR

luna

IP44



1,470 Kg / 0,0126 m³



0,400 Kg / 0,0021 m³

Installation

Wall | Ceiling

Finish	Code	€
● White	213194	115

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

Finish	Code	€
● White	213200	100

Included bulb LED G9 3W

Lumen	CCT	Code	€
390 lm	4000 K	209036	3,60

Recommended bulb G9 max 1 x 5W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

LUNA CEILING

SNOW



White polycarbonate base
and diffuser. Jointed fixing,
without visible screws.
Color: white.

IDEAL LUX
OUTDOOR

SNOW CEILING


snow



IP65



LED 18W | 1950/2050 lm | 50.000 h life



0,790 Kg / 0,0073 m³

Installation

Ceiling


CCT	Finish	Code	€
3000K	White	326238	60
4000K	White	326245	60

CLIO



clio

IP44



0,580 Kg / 0,0021 m³

Installation

Suspension

Finish	Code	€
White	144252	75
Anthracite	136073	75
Black	144245	75
Coffee	326801	75

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

IP44



0,200 Kg / 0,0021 m³

Installation

Ceiling

Finish	Code	€
White	148847	56
Anthracite	148861	56
Black	148878	56
Coffee	326795	56

Recommended bulb E27 max 1 x 42W


Lumen	CCT	Code	€
580 lm	4000 K	151960	2

Diffuser

Finish	Code	€
White	145068	40



0,540 Kg / 0,0177 m³



Finish	Code	€
White	116716	40




0,520 Kg / 0,0147 m³




Finish	Code	€
White	145020	40



0,610 Kg / 0,0221 m³



TECHO

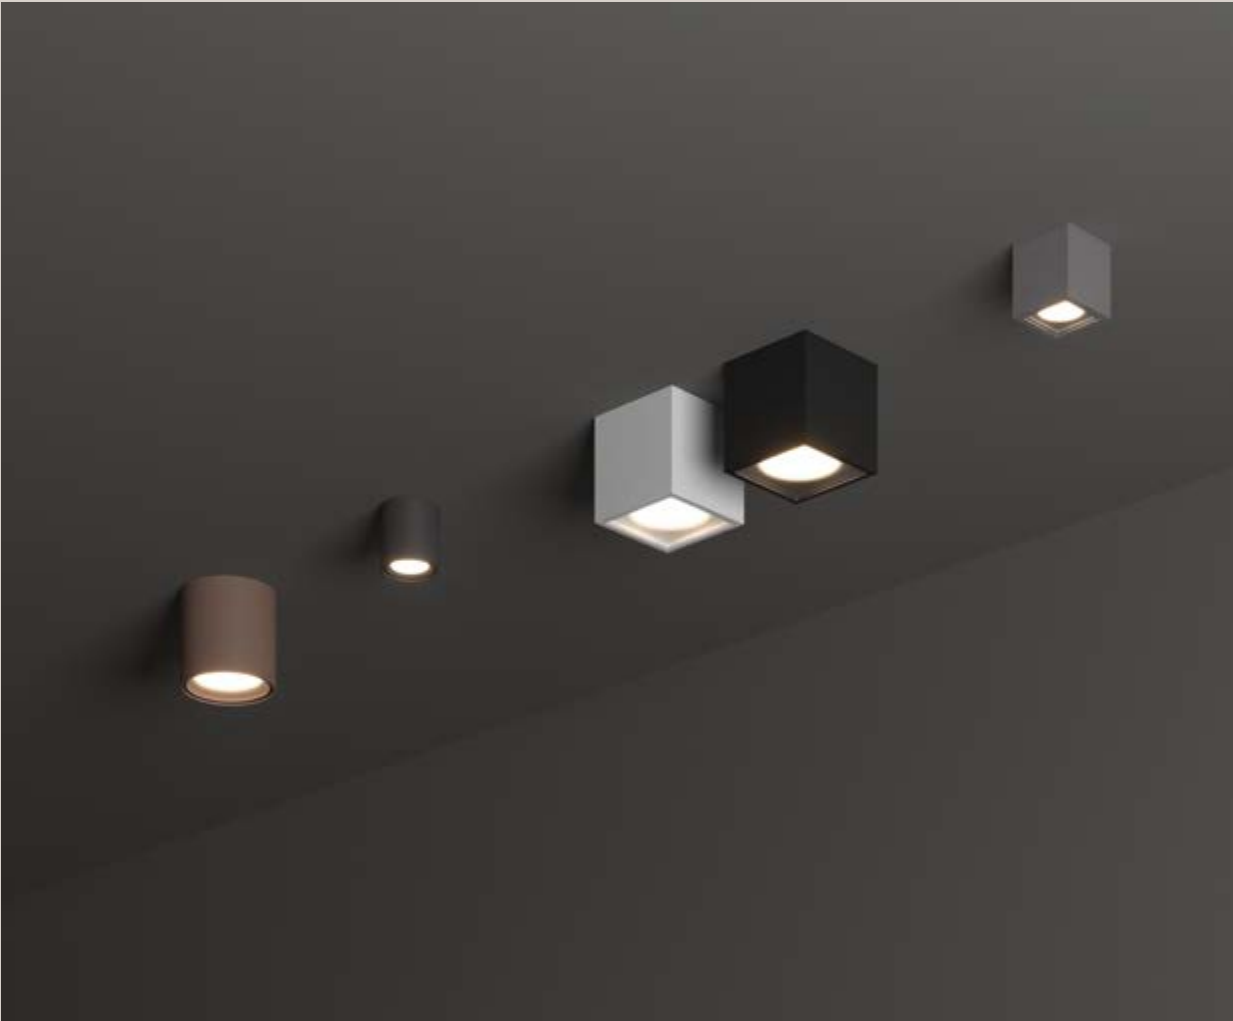

techo

IP54

Powder-coated die-cast aluminum body. Frosted clear tempered glass diffuser. Colors: anthracite, white, coffee or black.

IDEAL LUX
OUTDOOR



1,700 Kg / 0,0065 m³

Installation		
Ceiling		
Finish	Code	€
White	251523	115
Grey	326887	115
Anthracite	251516	115
Black	251530	115
Coffee	251547	115

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
780 lm	4000 K	253398	11



1,500 Kg / 0,0065 m³

Finish	Code	€
White	342689	115
Grey	342702	115
Anthracite	318103	115
Black	342719	115
Coffee	342696	115

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
780 lm	4000 K	253398	11



0,600 Kg / 0,0021 m³

Finish	Code	€
White	251561	64
Grey	326894	64
Anthracite	251554	64
Black	251578	64
Coffee	251592	64

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50



0,550 Kg / 0,0019 m³

Finish	Code	€
White	318127	64
Grey	342726	64
Anthracite	318110	64
Black	318141	64
Coffee	318134	64

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

P. 39

TECHO CEILING


GUN



Aluminum body with brushed natural finish or with varnish or various finishes. Pyrex glass diffuser. Up-and-down light emission.

gun

IP55



0,490 Kg / 0,0030 m³

Installation

Ceiling

Finish	Code	€
White	122663	54
Aluminum	092324	54
Grey	163642	54
Anthracite	236865	54
Black	122687	54
Coffee	163666	54

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

URANO




Powder painted turned aluminum body with anthracite or white matt finish. Satin and clear acrylic diffuser.

IDEAL LUX
OUTDOOR

urano

IP44



1,200 Kg / 0,0035 m³


Installation

Wall | Ceiling

Finish	Code	€
● White	168050	95
● Anthracite	168135	95

Recommended bulb **GX53 max 1x15W**

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5



0,630 Kg / 0,0020 m³

Finish	Code	€
● White	168036	70
● Anthracite	168111	70

Recommended bulb **GX53 max 1x15W**

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

URANO WALL LAMPS

BUBBLE



Turned die-cast aluminum body
with powder coating.
Matt white plastic diffuser.


IDEAL LUX

OUTDOOR

BUBBLE CEILING

bubble

IP44



1,730 Kg / 0,0246 m³

Installation

Wall | Ceiling

Finish	Code	€
White	135250	125

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

MIB



White powder coated aluminum base. Opal color plastic diffuser. Integrated LED source.


IDEAL LUX

OUTDOOR

mib

IP65

LED 18W | 1850/2150 lm | 35.000 h life



1,620 Kg / 0,0086 m³


Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	269115	150
4000K	White	202945	150

IP65

LED 18W | 1950/2250 | 35.000 h life



1,820 Kg / 0,0092 m³

Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	269122	150
4000K	White	202921	150

MIB CEILING


FIESTA




Black plastic electric cable,
bulb socket and grapping eyelets.
Supplied with plug for outdoor.

fiesta

IP44



1,530 Kg / 0,0066 m³



0,600 Kg / 0,0049 m³

Installation

Ceiling

Finish	Code	€
● Black	246796	100

Recommended bulb E27 max 10 x 15W

Lumen	CCT	Code	€
340 lm	3000 K	101286	2

Finish	Code	€
● Black	159836	65

Recommended bulb E27 max 5 x 15W

Lumen	CCT	Code	€
340 lm	3000 K	101286	2

IDEAL LUX

OUTDOOR


P. 43

FIESTA CEILING

369

O-ZONE



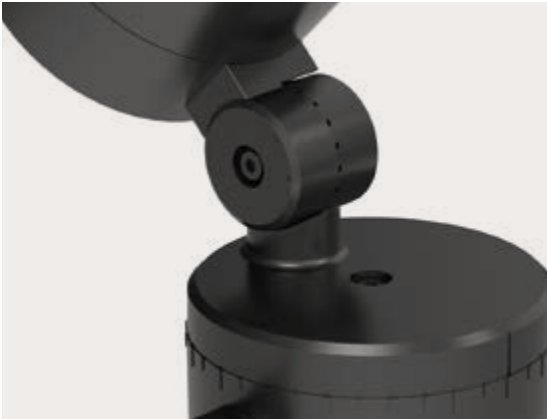

Powder coated die-cast aluminum body. Adjustable diffuser with clear tempered glass diffuser.

IDEAL LUX


OUTDOOR

O-ZONE WALL LAMPS

o-zone

IP66

LED 13W | 1100 lm | 50.000 h life.



0,800 Kg / 0,0066 m³

Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	● Black	337548	135

OMEGA




Powder painted aluminum body.
Reclinable diffuser with glass
screen. Available in different
finishes.

IDEAL LUX
OUTDOOR

omega round

IP54

LED 7W | 560/610 lm | 25.000 h life



0,500 Kg / 0,0012 m³

Installation

Wall | Ceiling


CCT	Finish	Code	€
3000K	White	285474	90
4000K	White	285481	90
3000K	Anthracite	285450	90
4000K	Anthracite	285467	90
4000K	Black	285504	90
4000K	Coffee	285498	90

OMEGA WALL LAMPS

omega square

IP54

LED 7W | 610 lm | 25.000 h life



0,600 Kg / 0,0012 m³

Installation

Wall | Ceiling

CCT	Finish	Code	€
4000K	White	285528	90
4000K	Anthracite	285511	90
4000K	Black	285535	90





ELIO



High performance resin body and diffuser: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C. Adjustable diffuser.


OUTDOOR IDEAL LUX

ELIO WALL LAMPS

elio

IP66

LED



0,500 Kg / 0,0027 m³

Installation

Wall

Finish	Code	€
● White	096483	82
● Black	096476	82

Included bulb LED GU10 3,5W

Lumen	CCT	Code	€
-	2700/4000 K	-	-

Recommended bulb LED GU10 max 1x 6W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

LITIO




High performance resin body and diffuser: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C. Adjustable diffuser.

OUTDOOR IDEAL LUX

LITIO WALL LAMPS

litio



0,690 Kg / 0,0043 m³

Installation

Wall

Finish	Code	€
White	145303	100
Grey	145327	100
Black	145341	100

Included bulb LED GX53 7W

Lumen	CCT	Code	€
-	3000/4000/6500 K	-	-

Recommended bulb GX53 max 1 x 10W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5


TERRA



Cast aluminum painted
frame. Adjustable body.
Transparent Pyrex
glass diffuser.

terra

IP65



1,140 Kg / 0,0058 m³


Installation

Wall

Finish	Code	€
● Anthracite	046167	85

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2



0,530 Kg / 0,0040 m³

Finish	Code	€
● Anthracite	046181	45

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

GAS




Powder coated die-cast aluminum body. Tempered and sandblasted clear glass diffuser. Available finishes: anthracite, white, coffee or black.

OUTDOOR IDEAL LUX

GAS WALL LAMPS

gas

IP43



0,320 Kg / 0,0020 m³

Installation

Wall

Finish	Code	€
White	091518	50
Anthracite	091525	50
Black	020228	50
Coffee	213095	50

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

XENO



Aluminum base with matt powder coating. Tempered clear glass adjustable diffusers.


IDEAL LUX

OUTDOOR

XENO WALL LAMPS

xeno

IP44



0,360 Kg / 0,0014 m³

Installation

Wall

Finish	Code	€
White	129488	40
Grey	129471	40
Black	129464	40

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50


SWIPE



Powder-coated aluminium body.
Adjustable diffuser with shiny
opal color polycarbonate screen.
Available with twilight
and motion sensor. Available
finishes: anthracite, white, grey,
coffee or black.

swipe

IP54 LED 20,5W | 2300 lm | 50.000 h life




1,200 Kg / 0,0057 m³

Installation

Wall

CCT	Finish	Code	€
3000K	White	287690	122
3000K	Grey	326863	122
3000K	Anthracite	287683	122
3000K	Black	287706	122
3000K	Coffee	307169	122

IP54 LED 21W | 2300 lm | 50.000 h life



1,300 Kg / 0,0057 m³

Installation

Wall

CCT	Finish	Code	€
3000K	White	287720	132
3000K	Grey	326870	132
3000K	Anthracite	287713	132
3000K	Black	287737	132
3000K	Coffee	307176	132

Lamp with presence detector included PIR (Passive InfraRed)

STYLE




Powder coated aluminum body.
Opal color plastic shade. Integrated
LED source. AP Sensor model
with PIR sensor. Available finishes:
anthracite, white, coffee, grey or
black.

IDEAL LUX
OUTDOOR

style

IP54

LED 8,5/9W / 950/1050 lm | 30.000 h life




0,390 Kg / 0,0019 m³

Installation

Wall

CCT	Finish	Code	€
3000K	White	269139	128
4000K	White	221502	128
3000K	Grey	322650	128
4000K	Grey	322643	128
3000K	Anthracite	246857	128
4000K	Anthracite	209845	128
3000K	Black	322636	128
4000K	Black	322629	128
3000K	Coffee	322704	128
4000K	Coffee	322681	128



0,400 Kg / 0,0018 m³

CCT	Finish	Code	€
3000K	White	269146	157
4000K	White	209852	157
3000K	Anthracite	246864	157
4000K	Anthracite	221519	157

Lamp with presence detector included PIR (Passive InfraRed)

STYLE WALL LAMPS


TRONCO



Varnished die-cast aluminum body with different finishes: anthracite, white, coffee, grey or black. Pyrex glass diffuser with aluminum elements inside.

tronco

IP44



1,110 Kg / 0,0103 m³

Installation

Wall		
Finish	Code	€
White	118659	65
Grey	026978	65
Anthracite	027005	65
Black	004716	65
Coffee	326962	65

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2

ETERE




Powder coated die-cast aluminum body. Satin opal polycarbonate glass diffusers. Black PVC cables. Colors: anthracite, coffee or black.

IDEAL LUX
OUTDOOR

etere

IP44 LED 9,5W | 1000/1100 lm | 25.000 h life



0,590 Kg / 0,0027 m³

Installation

Wall			
CCT	Finish	Code	€
3000K	● Anthracite	246925	90
4000K	● Anthracite	172408	90
3000K	● Black	322193	90
4000K	● Black	322209	90
3000K	● Coffee	269153	90
4000K	● Coffee	246949	90

ETERE WALL LAMPS


SNIF



Varnished die-cast aluminum body. Transparent Pyrex glass up-and-down double diffuser. Available finishes: anthracite, white, grey or black.

snif round

IP54



0,750 Kg / 0,0027 m³

Installation

Wall


Finish	Code	€
White	144283	50
Grey	061474	50
Anthracite	061467	50
Black	061450	50

Recommended bulb G9 max 1 x 40W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

snif square

IP44



0,600 Kg / 0,0023 m³

Installation

Wall

Finish	Code	€
White	144276	50
Grey	118666	50
Anthracite	121963	50
Black	123080	50

Recommended bulb G9 max 1 x 40W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

KEOPE




High performance resin body and diffuser: resistant to corrosion caused by atmospheric agents; colors stabilized during U.V. treatment; thermal shock resistance from -60°C to + 90°C. Transparent satin acrylic diffusers.

IDEAL LUX
OUTDOOR

keope

IP55



0,450 Kg / 0,0034 m³

Installation

Wall


Finish	Code	€
White	147772	66
Grey	147796	66
Black	147819	66

Included bulb LED GU10 x 3,5W

Lumen	CCT	Code	€
-	2700/4000 K	-	-

Recommended bulb GU10 max 2 x 6W

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50



0,350 Kg / 0,0034 m³

Finish	Code	€
White	147765	44

Included bulb LED GU10 x 3,5W

Lumen	CCT	Code	€
-	2700/4000 K	-	-

Recommended bulb GU10 max 2 x 6W

Lumen	CCT	Code	€
410 lm	4000 K	108292	2,50

KEOPE WALL LAMPS

GUN




Gun is essential, decisive, luminous. The upward and downward emission creates a play of light that sculpts the space, enhancing walls and surfaces with elegance and precision.

Aluminum body with brushed natural finish or with varnish or various finishes. Pyrex glass diffuser. Up-and-down light emission.

gun

IP54
IP44



1,350 Kg / 0,0067 m³


Installation

Wall

Finish	Code	€
White	092300	72
Aluminum	033020	72
Grey	163604	72
Anthracite	236858	72
Black	092317	72
Coffee	163611	72

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2




0,720 Kg / 0,0021 m³

Finish	Code	€
White	100388	65
Aluminum	033013	65
Grey	163628	65
Anthracite	236841	65
Black	100395	65
Coffee	163635	65

Recommended bulb GU10 max 2 x 35W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50


PUNTO

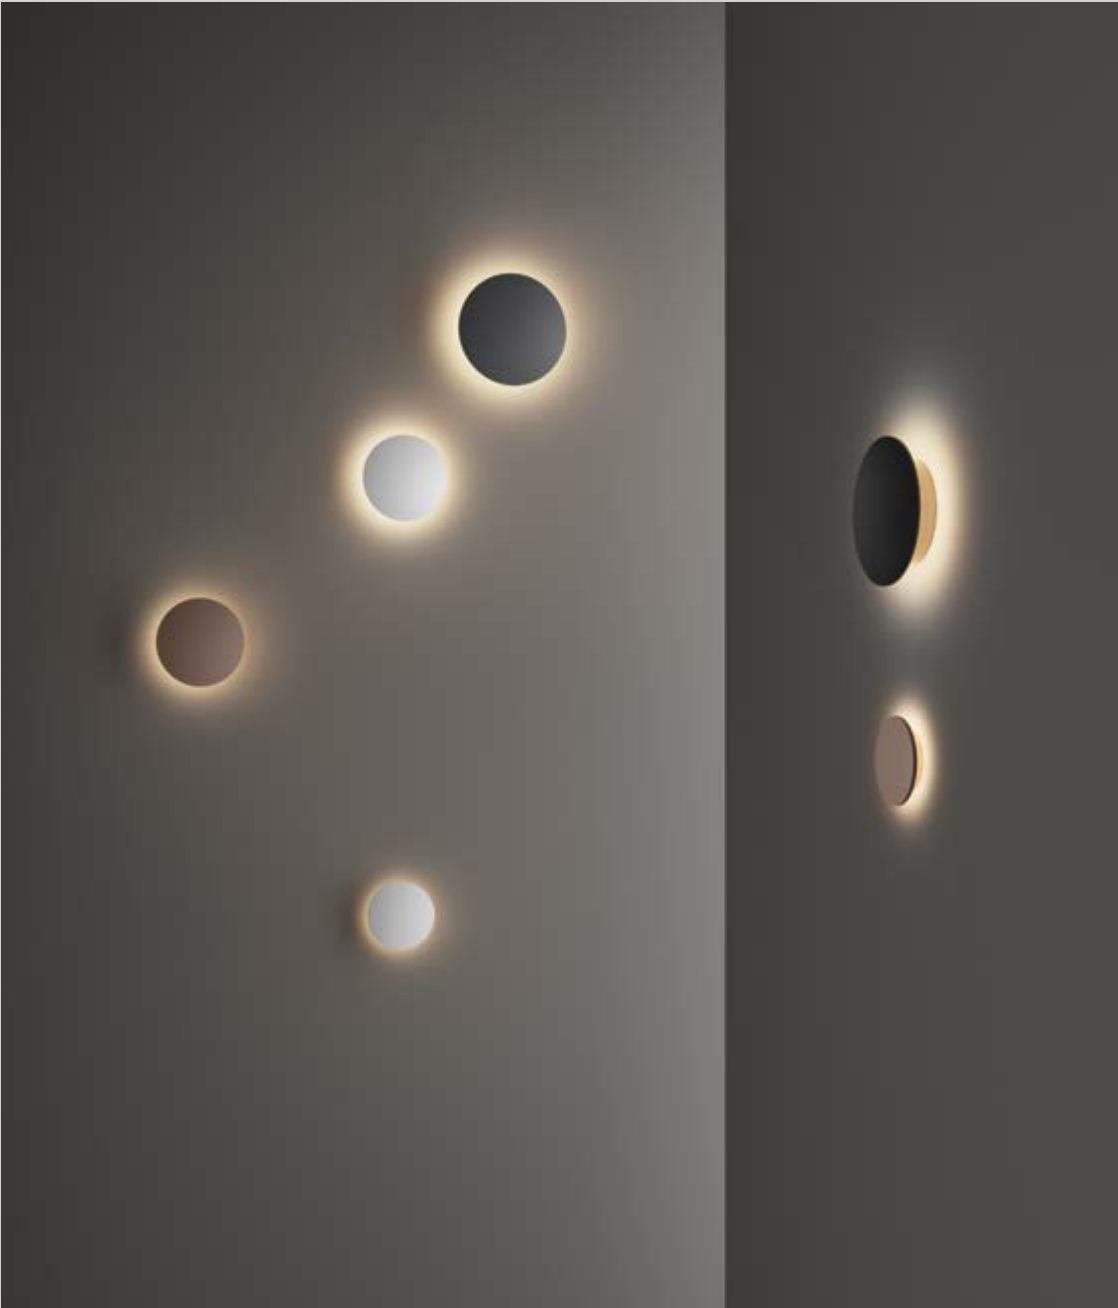

punto

IP54

LED 16W | 1750 lm | 30.000 h life



2,090 Kg / 0,0095 m³


Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	328553	152
3000K	Anthracite	313566	152
3000K	Black	328577	152
3000K	Coffee	328560	152

IP54

LED 12W | 1250 lm | 30.000 h life



1,280 Kg / 0,0049 m³


Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	328522	127
3000K	Anthracite	313559	127
3000K	Black	328546	127
3000K	Coffee	328539	127

IP54

LED 9W | 950 lm | 30.000 h life



0,820 Kg / 0,0018 m³

Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	313528	66
3000K	Anthracite	313511	66
3000K	Black	313542	66
3000K	Coffee	313535	66



Powder coated aluminum base and body. Glass diffusers. Indirect light emission. Finishes: anthracite, white, coffee, black.



16W
Ø300




12W
Ø240



9W
Ø180

TOFFEE

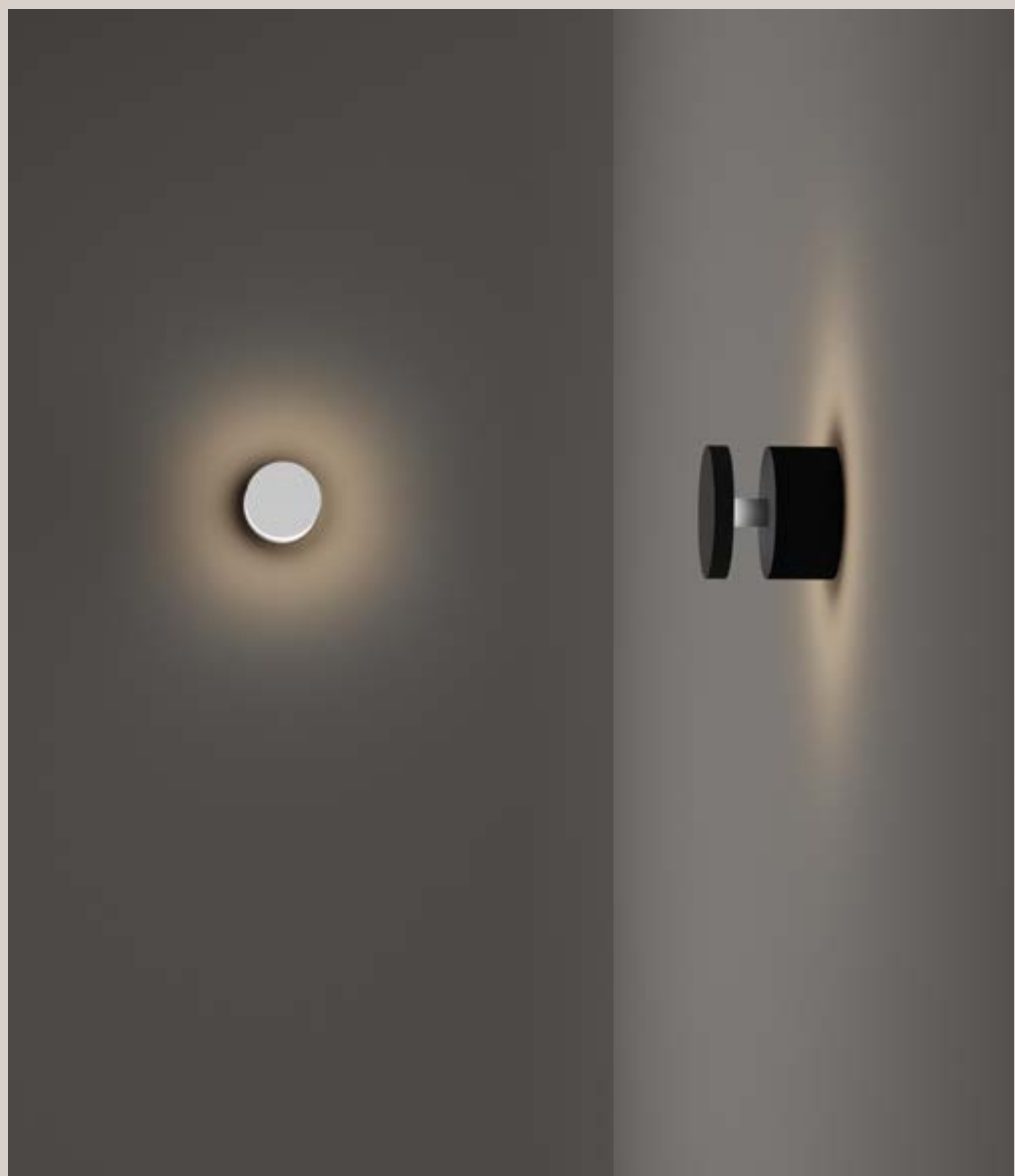

Powder-coated aluminium base and body. Clear tempered glass diffuser. Indirect light emission. Colors: anthracite, white, coffe or black.

IDEAL LUX
OUTDOOR

TOFFEE WALL LAMPS

toffee


IP65

LED 8W | 900 lm | 50.000 h life

Installation


Wall | Ceiling

CCT	Finish	Code	€
3000K	White	347738	75
3000K	Anthracite	321189	75
3000K	Black	321202	75
3000K	Coffee	321196	75



0,400 Kg / 0,0014 m³


LINEA

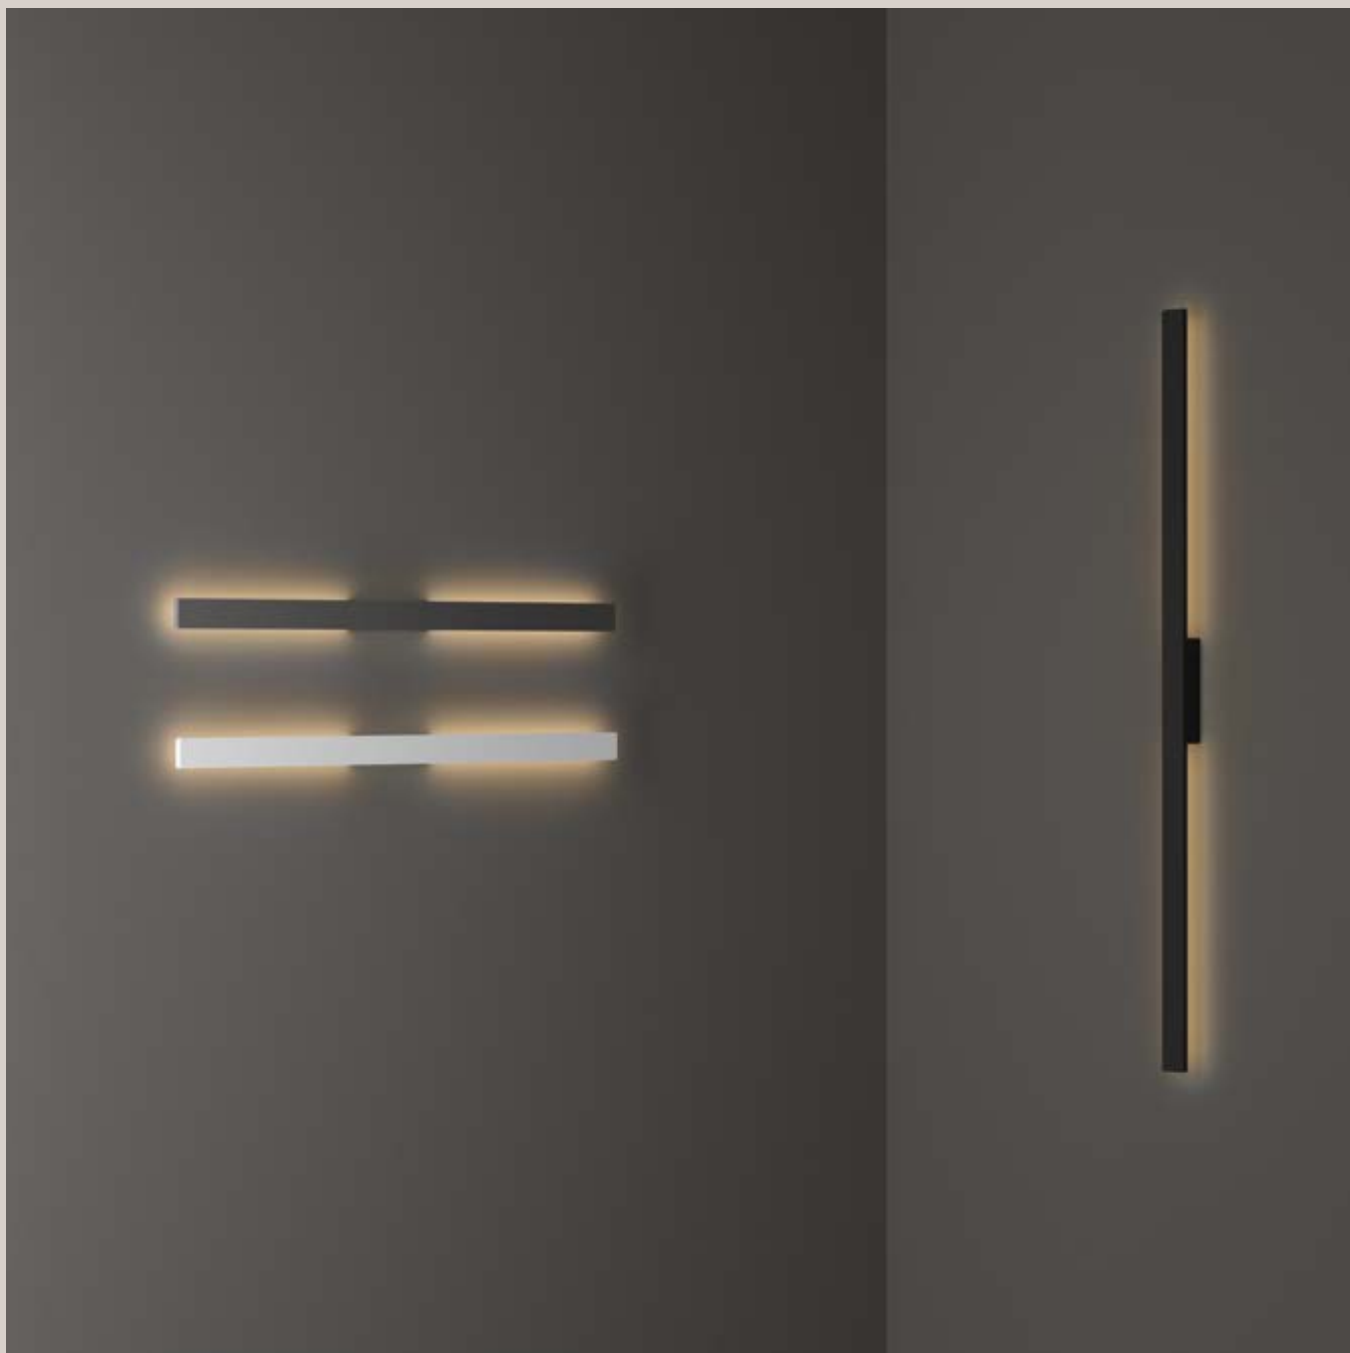

Structure and light body crafted from high-quality powder-coated aluminum, offering a refined and durable finish. Glass diffusers add a touch of elegance and delicacy, gently spreading a soft, embracing light. Indirect lighting creates a cozy, atmospheric ambiance.

linea

IP54 LED 23W | 2400 lm | 30.000 h life




1,750 Kg / 0,0165 m³

Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	328584	188
3000K	Anthracite	313504	188
3000K	Black	328607	188
3000K	Coffee	328591	188

IP54 LED 20W | 1950 lm | 30.000 h life



1,430 Kg / 0,0088 m³


Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	313474	147
3000K	Anthracite	313467	147
3000K	Black	313498	147
3000K	Coffee	313481	147



Powder coated aluminum base
and body. Glass diffusers.
Indirect light emission.
Finishes: anthracite, white,
coffee, black.

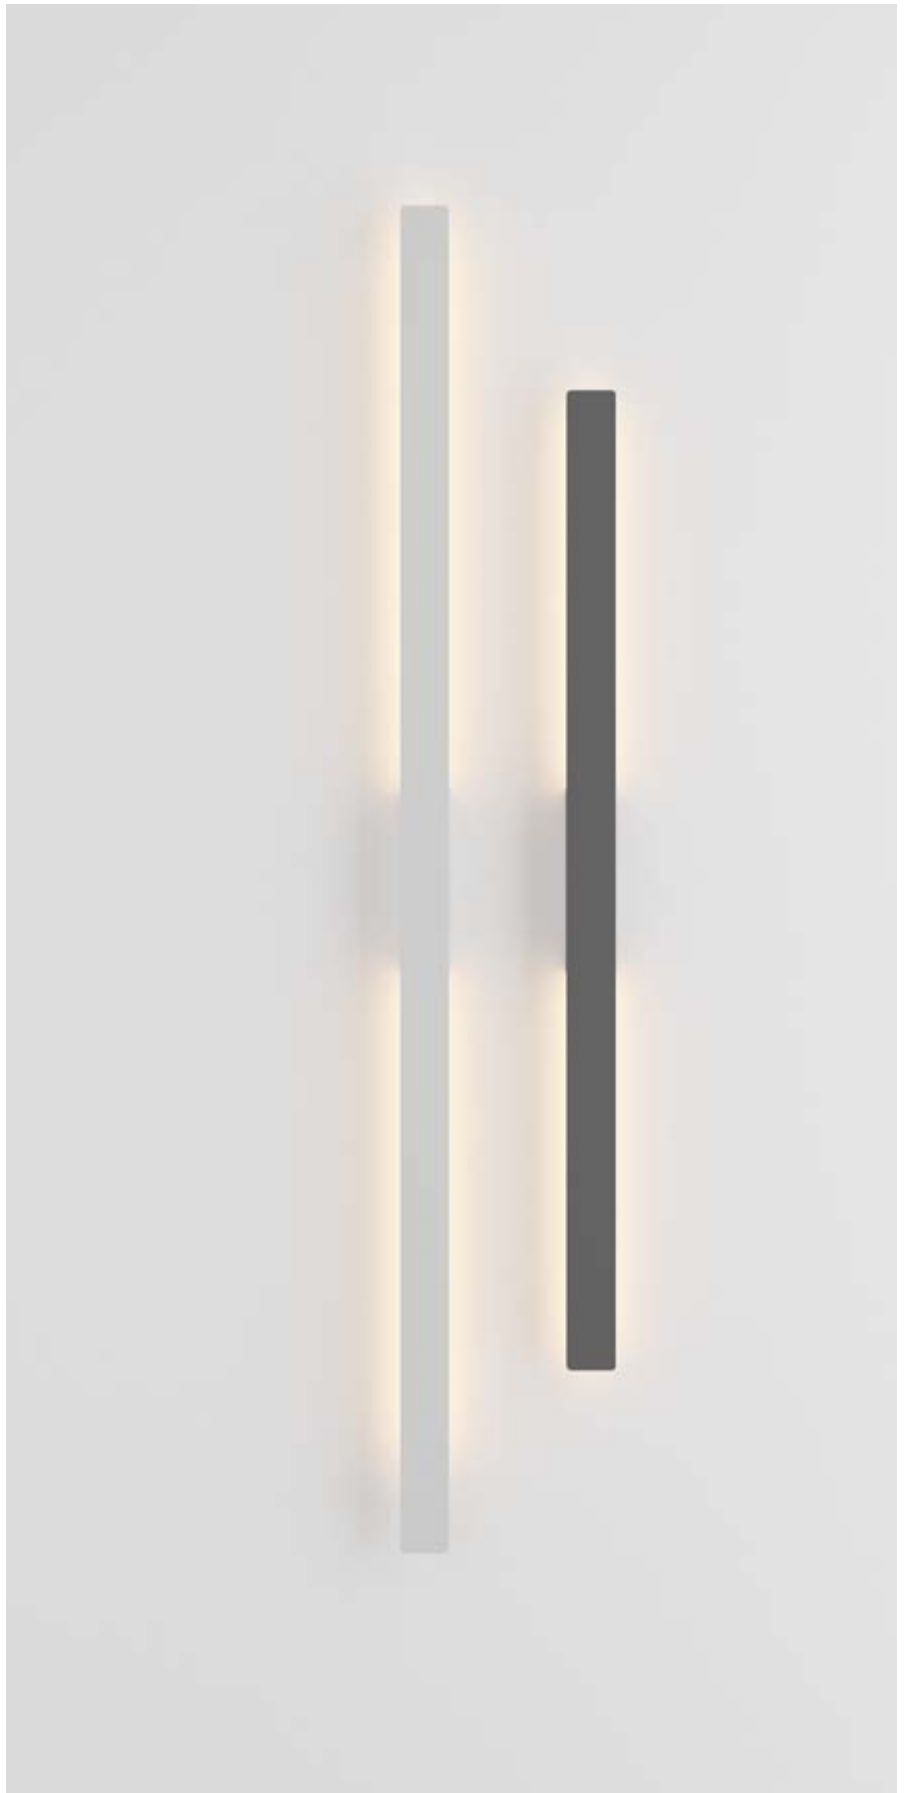

IKO




Powder coated die-cast aluminum body. Tempered and frosted clear glass up-and-down double diffuser. Available finishes: anthracite, white or grey.

OUTDOOR IDEAL LUX

iko

IP54



0,600 Kg / 0,0042 m³

Installation

Wall

Finish	Code	€
White	018522	50
Grey	092218	50
Anthracite	018515	50

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

IKO WALL LAMPS


SIRIO



Powder coated die-cast aluminum body. Clear tempered glass diffuser. Colors: anthracite, white, coffee, gray or black.

sirio

IP65



0,820 Kg / 0,0018 m³

Installation

Wall

Finish	Code	€
White	318226	80
Grey	345611	80
Anthracite	318202	80
Black	318219	80
Coffee	318196	80

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

ATOM




Atom is the lamp that designs light with precision. The powder-coated aluminium body houses elegant glass diffusers, while the movable fins allow the width of the double light beam to be carefully adjusted, both upwards and downwards.

atom

IP54

LED COB | 30.000 h life

Material: Aluminum




0,650 Kg / 0,0013 m³

Power		CRI		SDCM	
12W		≥90		3	
Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000K	White	313436	71
On-Off	1050 lm	3000K	Grey	366821	71
On-Off	1050 lm	3000K	Anthracite	313429	71
On-Off	1050 lm	3000K	Black	313450	71
On-Off	1050 lm	3000K	Coffee	313443	71
On-Off	1100 lm	4000K	White	366807	71
On-Off	1100 lm	4000K	Grey	366838	71
On-Off	1100 lm	4000K	Anthracite	366791	71
On-Off	1100 lm	4000K	Black	366845	71
On-Off	1100 lm	4000K	Coffee	366814	71

Driver

Included



1,160 Kg / 0,0025 m³

Power		CRI		SDCM	
25W		≥90		3	
Control	Lumen	CCT	Finish	Code	€
On-Off	2100 lm	3000K	White	328652	137
On-Off	2100 lm	3000K	Grey	366883	137
On-Off	2100 lm	3000K	Anthracite	313412	137
On-Off	2100 lm	3000K	Black	328676	137
On-Off	2100 lm	3000K	Coffee	328669	137
On-Off	2250 lm	4000K	White	366869	137
On-Off	2250 lm	4000K	Grey	366890	137
On-Off	2250 lm	4000K	Anthracite	366852	137
On-Off	2250 lm	4000K	Black	366906	137
On-Off	2250 lm	4000K	Coffee	366876	137

Driver


Included



Powder coated aluminum body. Glass diffusers. Double light beam, up and down with adjustable width and movable wings.



POST-IT

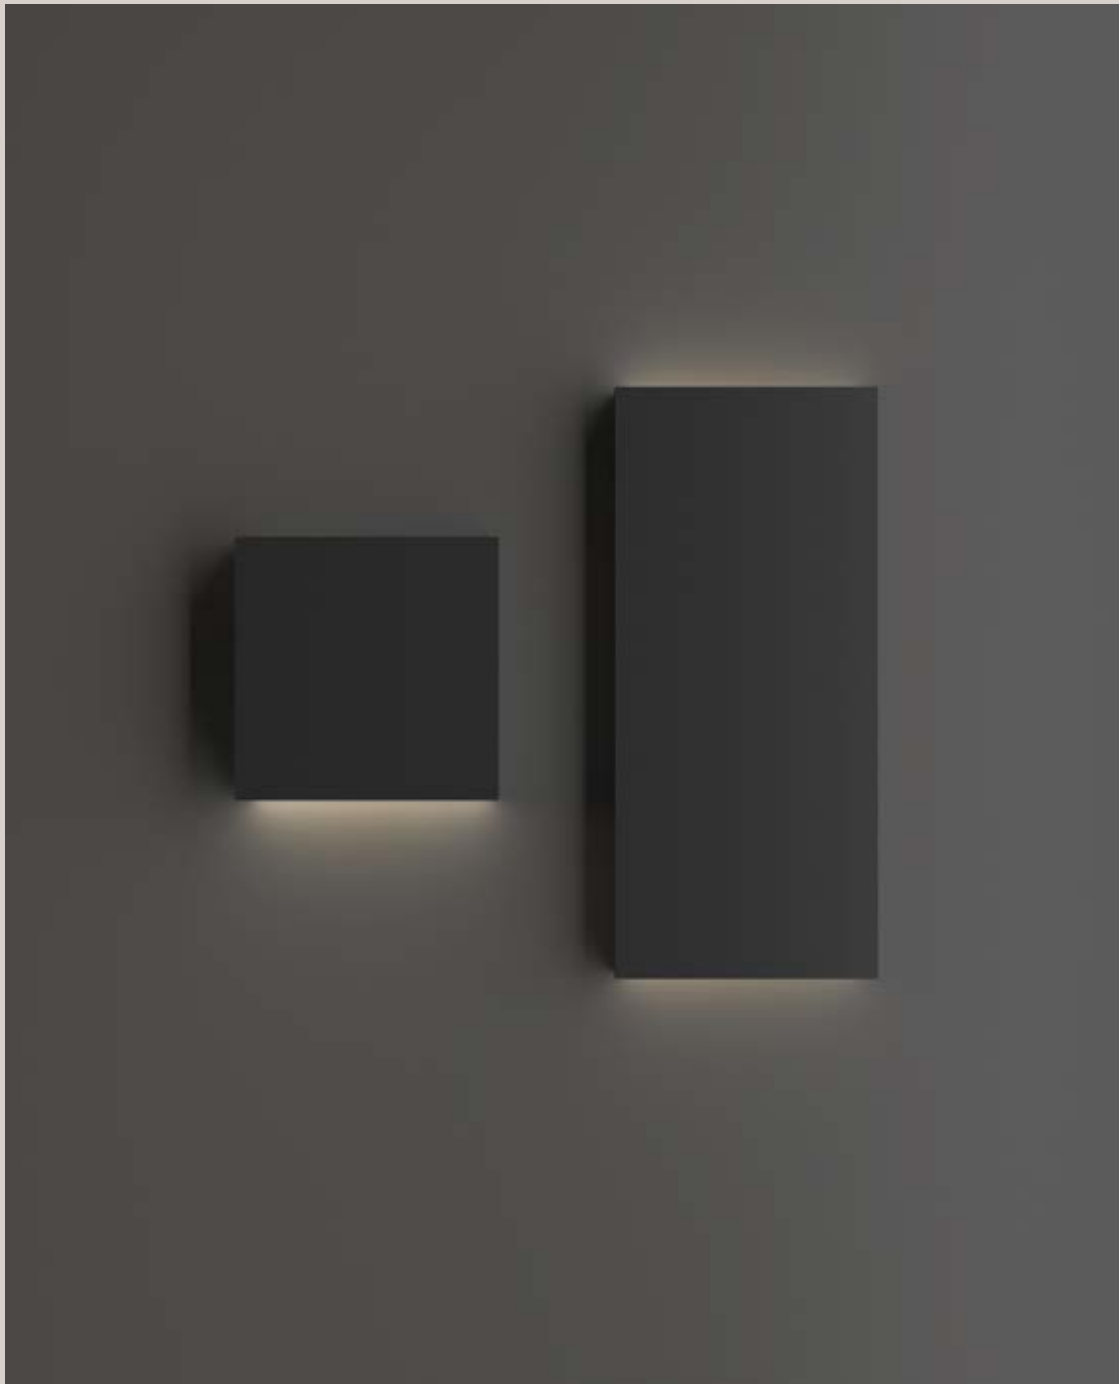



OUTDOOR IDEAL LUX


post-it



IP65



(LED) LED 6W | 750 lm 30.000 h life



0,450 kg/0,0009 m³

 $1,400 \text{ kg}/0,0009 \text{ m}^3$

Installation

Wall


Control	Lumen	CCT	Finish	Code	€
On-Off	750 lm	3000 K	 White	369372	60
On-Off	750 lm	3000 K	 Black	369419	60
On-Off	750 lm	3000 K	 Coffee	369396	60
On-Off	750 lm	3000 K	 Steel*	369273	130
On-Off	750 lm	3000 K	 Brass*	335933	130



IP65



(LED) LED 3W | 370 lm | 30.000 h life

 $0,200 \text{ Kg}/0,0005 \text{ m}^3$ 
$$0,500 \text{ Kg}/0,0005 \text{ m}^3$$

Installation

Wall

Control	Lumen	CCT	Finish	Code	€
On-Off	370 lm	3000 K	 White	335957	40
On-Off	370 lm	3000 K	 Black	335919	40
On-Off	370 lm	3000 K	 Coffee	335896	40
On-Off	370 lm	3000 K	 Steel*	335865	90
On-Off	370 lm	3000 K	 Brass*	335926	90

POST-IT WALL LAMPS

DIMMABLE DRIVER- Not included - Required

Control	Power	Output	Measure (L x H x P)	Code	€
On/Off	18 W	12 Vdc	69 x 35 x 23	369143	30
On/Off	30 W	12 Vdc	95 x 53 x 23	369099	35
On/Off	60 W	12 Vdc	168 x 38 x 30	373041	42


UP



Powder coated die-cast aluminum body. Clear Pyrex glass diffusers. Available finishes: anthracite, white, coffee or black.

up

IP44



0,520 Kg / 0,0019 m³


Installation

Wall

Finish	Code	€
White	115320	40
Anthracite	115337	40
Black	115344	40
Coffee	213354	40

Recommended bulb G9 max 2 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10



0,320 Kg / 0,0011 m³

Finish	Code	€
White	115290	25
Anthracite	115306	25
Black	115313	25
Coffee	213347	25

Recommended bulb G9 max 2 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

ARGO






Powder coated die-cast aluminum body. Clear tempered glass diffuser with white inner reflector. Available in anthracite or white finish.

argo

 IP65

 LED 11W | 1000/1150 lm | 30.000 h life




 0,600 Kg / 0,0011 m³

Installation			
Wall			
CCT	Finish	Code	€
3000K	White	268309	81
4000K	White	268316	81
3000K	Anthracite	250946	81
4000K	Anthracite	268293	81

 IP65

 LED 6W | 550/570 lm | 30.000 h life



 0,600 Kg / 0,0011 m³

Installation			
Wall			
CCT	Finish	Code	€
3000K	White	317564	71
4000K	White	321691	71
3000K	Anthracite	321646	71
4000K	Anthracite	317571	71


TETRIS



Aluminum body with matt powder coating. Clear tempered glass diffuser. Available finishes: anthracite, white, coffee, grey or black.

tetris-1

IP44



0,390 Kg / 0,0017 m³

Installation

Wall


Finish	Code	€
White	114293	82
Grey	113760	82
Anthracite	113753	82
Black	326955	82
Coffee	213323	82

Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

tetris-2

IP44



0,520 Kg / 0,0011 m³

Installation

Wall

Finish	Code	€
White	269221	91
Anthracite	113791	91

Recommended bulb G9 max 2 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10





TWIN



Anthracite, white, coffee, grey or black powder coated die-cast aluminum body. Double, top and bottom, clear frosted Pyrex glass diffuser.


IDEAL LUX
OUTDOOR

TWIN WALL LAMPS

429

twin

IP44



0,510 Kg / 0,0029 m³

Installation

Wall		
Finish	Code	€
White	115351	55
Grey	326979	55
Anthracite	115368	55
Black	115375	55
Coffee	213330	55

Recommended bulb G9 max 1 x 28W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

ANDROMEDA


Andromeda is the outdoor wall light that explores space with elegance. Andromeda is perfect for those seeking a balance between contemporary design and sophisticated luminosity.



Die-cast aluminum body light with varnish finish. Double frosted Pyrex glass, up-and-down. Available finishes: anthracite, white, coffee, grey or black.

andromeda

IP55



1,630 Kg / 0,0052 m³


Installation

Wall

Finish	Code	€
White	100364	85
Grey	163543	85
Anthracite	092355	85
Black	100371	85
Coffee	163550	85

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2



1,000 Kg / 0,0039 m³

Finish	Code	€
White	066868	55
Grey	158822	55
Anthracite	061580	55
Black	061597	55
Coffee	163536	55

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

GLOVE




Powder coated die-cast aluminum body. Double, top and bottom, frosted tempered clear glass diffuser. Available finishes: anthracite, white, coffee or black.

GIOVE WALL LAMPS
OUTDOOR
IDEAL LUX

giove

IP54



0,900 Kg / 0,0043 m³

Installation

Wall

Finish	Code	€
White	092195	70
Anthracite	092188	70
Black	092201	70
Coffee	163598	70

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

GIOVE WALL LAMPS


FELIX



High performance resin body:
resistant to corrosion caused by
both atmospheric agents and
chemical fertilizers, colors stabilized
during UV rays treatment, thermal
shock resistance from -60°
to +90°C.

IDEAL LUX
OUTDOOR

felix



0,520 Kg / 0,0050 m³

Installation

Wall


Finish	Code	€
● White	123745	52

Included bulb LED E27 x 8W

Lumen	CCT	Code	€
-	2700/4000/6500 K	-	-

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2



0,610 Kg / 0,0048 m³

Finish	Code	€
● White	123776	35
● Grey	123769	35
● Black	123783	35

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

FELIX WALL LAMPS


REX



Powder coated die-cast aluminum body available in different colors: anthracite, white, coffee, grey or black. White acrylic diffuser.

rex

IP44



0,600 Kg / 0,0057 m³


Installation

Wall

Finish	Code	€
White	092393	42
Grey	322735	42
Anthracite	092409	42
Black	322728	42
Coffee	213217	42

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




0,600 Kg / 0,0065 m³

Finish	Code	€
White	092416	42
Grey	370965	42
Anthracite	092423	42
Black	118635	42
Coffee	370941	42

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



0,600 Kg / 0,0065 m³

Finish	Code	€
White	092430	42
Grey	370972	42
Anthracite	092447	42
Black	118642	42
Coffee	213224	42

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2






POLAR



High performance resin body
and diffuser: resistant to corrosion
caused by both atmospheric agents
and chemical fertilizers, colors
stabilized during UV rays treatment,
thermal shock resistance
from -60° to +90°C.

polar

IP66



0,800 Kg / 0,0109 m³


Installation

Wall | Ceiling

Finish	Code	€
● White	096711	26
● Black	096704	26

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




0,800 Kg / 0,0106 m³

Finish	Code	€
● White	096667	37
● Black	096674	37

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

IP66



0,800 Kg / 0,0109 m³


Installation

Wall

Finish	Code	€
● White	096735	26
● Black	096728	26

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




0,800 Kg / 0,0106 m³

Finish	Code	€
● White	096681	37
● Black	096698	37

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

BUBBLE

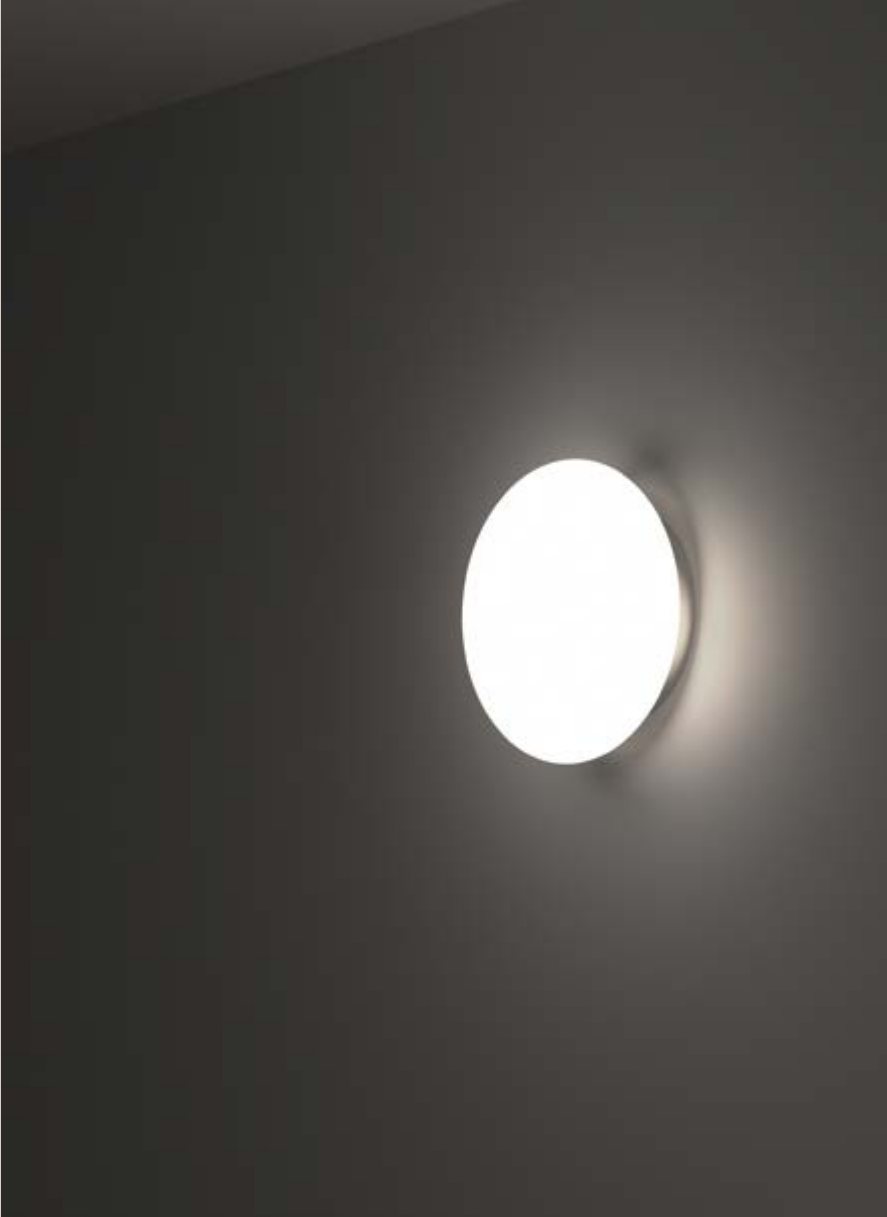

Turned die-cast aluminum body with powder coating. Matt white plastic diffuser.


IDEAL LUX

OUTDOOR

BUBBLE WALL LAMPS

bubble

IP54



0,480 Kg / 0,0036 m³

Installation

Wall | Ceiling

Finish	Code	€
White	158907	72

Recommended bulb G9 max 2 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

SNOW



White polycarbonate base and diffuser. Jointed fixing, without visible screws. Color: white.

IDEAL LUX

OUTDOOR

SNOW WALL LAMPS


snow



IP65



LED 6W | 600/660 lm | 50.000 h life



0,170 Kg / 0,0013 m³

Installation

Wall

CCT	Finish	Code	€
3000K	White	326214	27
4000K	White	326221	27

CLIO



Modular fitting with turned die-cast aluminum frame, finished with anthracite, white, black and coffee powder coating. Plastic diffuser with matt white finish.

clio

IP44



0,680 Kg / 0,0035 m³


Installation

Wall

Finish	Code	€
White	146775	80
Anthracite	145228	80
Black	146799	80
Coffee	326788	80

Recommended bulb E27 max 1 x 42W


Lumen	CCT	Code	€
580 lm	4000 K	151960	2



0,540 Kg / 0,0177 m³


Diffuser

Finish	Code	€
White	145068	40



0,520 Kg / 0,0144 m³

Finish	Code	€
White	116716	40



0,610 Kg / 0,0221 m³

Finish	Code	€
White	145020	40

DOWN



Die-cast aluminum body light with anthracite or white powder coat finish. Acrylic diffuser.


IDEAL LUX

OUTDOOR

DOWN WALL LAMPS

down

IP44



0,270 Kg / 0,0012 m³

Installation

Wall

Finish	Code	€
● White	115382	30
● Anthracite	122045	30

Recommended bulb G9 max 1 x 28W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

FEBE



Surface-mounted luminaire with powder-coated die-cast aluminum body. Clear tempered glass diffuser.

IDEAL LUX

OUTDOOR

febe

FEBE WALL LAMPS

IP65 LED 6W 550 lm 30.000 h life		Installation Wall										
0,760 Kg / 0,0012 m³	<table><tr><th>CCT</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>3000K</td><td>● Anthracite</td><td>250854</td><td>76</td></tr></table>				CCT	Finish	Code	€	3000K	● Anthracite	250854	76
	CCT	Finish	Code	€								
3000K	● Anthracite	250854	76									
0,760 Kg / 0,0013 m³	<table><tr><th>CCT</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>3000K</td><td>● Anthracite</td><td>268354</td><td>76</td></tr></table>				CCT	Finish	Code	€	3000K	● Anthracite	268354	76
	CCT	Finish	Code	€								
3000K	● Anthracite	268354	76									

DEDRA




Powder coated die-cast aluminum body. Clear acrylic diffuser. Indirect light emission. Finishes: white, anthracite, coffee.

dedra

IP65

LED 1,5W | 160 lm | 20.000 h life




0,200 Kg / 0,0005 m³

Installation

Wall

Finish	Code	€
White	328638	48
Anthracite	316871	48
Coffee	328621	48



0,170 Kg / 0,007 m³

Finish	Code	€
White	316901	44
Anthracite	328645	44
Coffee	316895	44

PURE



Pure is the portable lamp that combines essentiality and freedom. Pure recharges fully in 6 hours and is ready to accompany every moment, without space constraints.

Matt varnished metal base, stem and shade. Acrylic diffuser.
Table lamp with rechargeable battery and integrated touch switch.
Finishes: white, coffee, black.
Battery charging time 5 hours.

pure

 IP54	 LED 1,5W 220 lm 30.000 h life				Installation Bollard																
					<table><tr><th>CCT</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>3000K</td><td> White</td><td>311708</td><td>117</td></tr><tr><td>3000K</td><td> Black</td><td>328515</td><td>117</td></tr><tr><td>3000K</td><td> Coffee</td><td>328508</td><td>117</td></tr></table>	CCT	Finish	Code	€	3000K	 White	311708	117	3000K	 Black	328515	117	3000K	 Coffee	328508	117
CCT	Finish	Code	€																		
3000K	 White	311708	117																		
3000K	 Black	328515	117																		
3000K	 Coffee	328508	117																		
 1,580 Kg / 0,0058 m ³					 Lamp with rechargeable battery included. 6 hours life																

 IP54	 LED 1,5W 220 lm 30.000 h life				Installation Table																
					<table><tr><th>CCT</th><th>Finish</th><th>Code</th><th>€</th></tr><tr><td>3000K</td><td> White</td><td>311685</td><td>86</td></tr><tr><td>3000K</td><td> Black</td><td>311678</td><td>86</td></tr><tr><td>3000K</td><td> Coffee</td><td>311661</td><td>86</td></tr></table>	CCT	Finish	Code	€	3000K	 White	311685	86	3000K	 Black	311678	86	3000K	 Coffee	311661	86
CCT	Finish	Code	€																		
3000K	 White	311685	86																		
3000K	 Black	311678	86																		
3000K	 Coffee	311661	86																		
 0,840 Kg / 0,0056 m ³					 Lamp with rechargeable battery included. 6 hours life																

TOFFEE



Rechargeable
battery-operated
table lamp. Powder
coated aluminum
body. Acrylic
diffuser.


IP54

LED 2W | 320 lm | 20.000 h life



Installation

Table



0,460 Kg / 0,0051 m³



Lamp with rechargeable battery included. 8 hours life.

Installation

Table

CCT	Finish	Code	€
3000K	White	311715	90
3000K	Black	328614	90
3000K	Coffee	347868	90


IP65

LED 11W | 1200 lm | 20.000 h life



1,400 Kg / 0,0263 m³

CCT	Finish	Code	€
3000K	Anthracite	347837	106
3000K	Black	347851	106
3000K	Coffee	347844	106



1,220 Kg / 0,0394 m³


Installation

Bollard

CCT	Finish	Code	€
3000K	Anthracite	347776	84
3000K	Black	347790	84
3000K	Coffee	347783	84


IP65

LED 8W | 900 lm | 20.000 h life



0,950 Kg / 0,0240 m³

CCT	Finish	Code	€
3000K	Anthracite	347745	80
3000K	Black	347769	80
3000K	Coffee	347752	80



0,830 Kg / 0,0153 m³

CUTE





Rechargeable lamp with a refill base. Powder coated metal frame. Acrylic diffuser with downward light emission. Colors: white, black, coffee, chrome and gold.

OUTDOOR IDEAL LUX

cute

CUTE BOLLARD AND TABLE LAMPS

 IP65		 LED 2,5W 220 lm 50.000 h life.								Installation													
																				Table			
																				CCT	Finish	Code	€
																				2200/2700 K	 White	346892	86
																				2200/2700 K	 Black	346908	86
																				2200/2700 K	 Coffee	346915	86
																				2200/2700 K	 Oro	346939	86
		0,440 Kg / 0,0026 m³										 Lamp with rechargeable battery included. 9,5 hours life.											
																				Charging base			
																				Finish	Code	€	
																				 Black	348377	183	
		1.920 Kg / 0.0092 m³																					

cute





LOLITA






Table lamp with rechargeable battery with white, grey, black or coffee finish. Plastic base. Metal frame. Plastic diffuser. The table lamp has 8 hours autonomy. Battery charging time 4 hours.

OUTDOOR IDEAL LUX

P. 33

LOLITA BOLLARD AND TABLE LAMPS





lolita

 IP54		 LED 1,8W 200 lm 25.000 h life								Installation													
																				Table			
																				CCT	Finish	Code	€
																				3000K	 White	286723	56
																				3000K	 Grey	286730	56
																				3000K	 Black	286716	56
																				3000K	 Coffee	286747	56
																				 0,550 Kg / 0,0080 m³			

TWIGGY



Powder coated aluminum frame. Satin acrylic diffuser. Equipped with spike. Colors: black and coffee.

IP65		LED 1,5W / 110 lm 30.000 h life		Installation			
				Bollard			
				CCT	Finish	Code	€
				3000K	● Black	348346	52
				3000K	● Coffee	348339	52
		0,290 Kg / 0,0031 m³					
				CCT	Finish	Code	€
				3000K	● Black	348360	63
				3000K	● Coffee	348353	63
		0,031 Kg / 0,0033 m³					
				CCT	Finish	Code	€
				3000K	● Black	347882	47
				3000K	● Coffee	347875	47
		0,210 Kg / 0,0033 m³					
				CCT	Finish	Code	€
				3000K	● Black	347905	58
				3000K	● Coffee	347899	58
		0,230 Kg / 0,0020 m³					
				Driver			
				Not included		Code	€
				Required		276205	12

DORIS



Multi-greys plastic diffuser with granite effect. Supplied with plug and spike for ground installation.

IDEAL LUX


OUTDOOR

DORIS BOLLARD AND TABLE LAMPS

467

doris

IP44



7,600 Kg / 0,5447 m³


Installation

Bollard

Finish	Code	€
White	195506	545

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




4,050 Kg / 0,2422 m³

Finish	Code	€
White	195490	325

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



3,000 Kg / 0,1339 m³

Finish	Code	€
White	195483	215

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



1,210 Kg / 0,0327 m³

Finish	Code	€
White	214009	127

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

SOLE




Opal color plastic diffuser.
Supplied with cable, plug and picket
for the installation on the ground.

IDEAL LUX

OUTDOOR

sole

IP44



4,500 Kg / 0,1379 m³


Installation

Bollard

Finish	Code	€
White	191614	225

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




3,900 Kg / 0,0741 m³

Finish	Code	€
White	191621	150

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




2,700 Kg / 0,0371 m³

Finish	Code	€
White	191638	120

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



1,200 Kg / 0,0144 m³

Finish	Code	€
White	318820	110

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

P. 15

SOLE BOLLARD AND TABLE LAMPS



Ø500

Ø400

Ø300

Ø200




LUNA



Opal colour plastic frame-diffuser.
Supplied with power cable,
plug and picket for installation
on the ground.

IDEAL LUX
OUTDOOR

IP44



6,700 Kg / 0,1639 m³


Installation

Bollard

Finish	Code	€
White	191607	290

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




4,700 Kg / 0,1005 m³

Finish	Code	€
White	191584	210

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



2,700 Kg / 0,0416 m³

Finish	Code	€
White	191577	150

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

LUNA BOLLARD AND TABLE LAMPS


SASSO



Opal color plastic diffuser. Supplied with power cable, plug and picket for installation on the ground.

sasso

IP44



1,500 Kg / 0,0444 m³


Installation

Bollard

Finish	Code	€
White	161778	205

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




0,900 Kg / 0,0209 m³

Finish	Code	€
White	161761	145

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



0,710 Kg / 0,0134 m³

Finish	Code	€
White	161754	105

Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

AGOS



Powder coated die-cast aluminum body. Satin clear acrylic diffuser. Anthracite, coffee or black color.

IDEAL LUX

OUTDOOR

P. 31


AGOS BOLLARD AND TABLE LAMPS

477

agos

IP54

LED 6,5W | 670 lm | 25.000 h life




1,100 Kg / 0,0179 m³

Installation

Bollard


CCT	Finish	Code	€
3000 K	Anthracite	254319	102
3000 K	Black	326733	102
3000 K	Coffee	326726	102



0,950 Kg / 0,0127 m³

CCT	Finish	Code	€
3000 K	Anthracite	254388	81
3000 K	Black	326696	81
3000 K	Coffee	326689	81



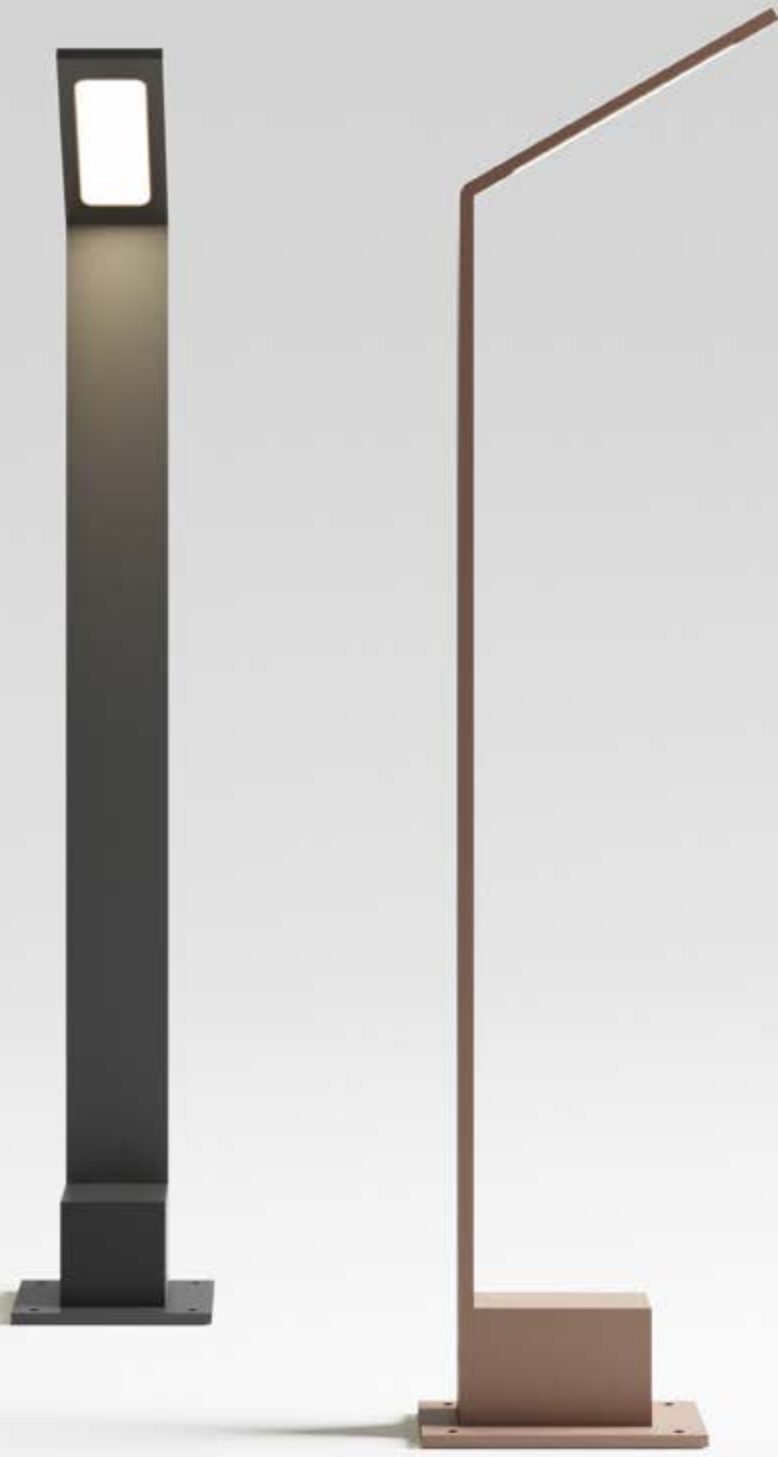


STYLE



OUTDOOR IDEAL LUX

STYLE BOLLARD AND TABLE LAMPS




CCT	Finish	Code	€
3000K	 White	369594	129
3000K	 Grey	369648	129
3000K	 Anthracite	364841	129
3000K	 Black	369662	129
3000K	 Coffee	369624	129

SIRIO



Powder painted aluminum body. Clear tempered glass diffuser for the integrated LED version, sandblasted for the model with bulb.



1,880 Kg / 0,0179 m³


Installation

Bollard

Finish	Code	€
White	115085	150
Grey	246963	150
Anthracite	115061	150
Black	115108	150
Coffee	213262	150

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5




1,550 Kg / 0,0136 m³

Finish	Code	€
White	115092	130
Grey	246970	130
Anthracite	115078	130
Black	115115	130
Coffee	213279	130

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5




0,400 Kg / 0,0066 m³

Finish	Code	€
White	365671	100
Grey	369891	100
Anthracite	369860	100
Black	369914	100
Coffee	369884	100

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5




2,300 Kg / 0,0170 m³

Installation

Bollard

Finish	Code	€
White	365404	200
Grey	365411	200
Anthracite	339634	200
Black	365398	200
Coffee	365428	200




1,760 Kg / 0,0128 m³

Finish	Code	€
White	365367	190
Grey	365374	190
Anthracite	339627	190
Black	365350	190
Coffee	365381	190

TITANO






Porous resin body. Matt black varnished metal base and diffuser's detail. Downward light emission. Integrated LED source.

OUTDOOR IDEAL LUX

titano

IP55

LED 8,5W | 560/580 lm | 50.000 h life



9,220 Kg / 0,0540 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	Granite	246987	350
4000K	Granite	187327	350



6,800 Kg / 0,0363 m³

CCT	Finish	Code	€
3000K	Granite	246994	275
4000K	Granite	157856	275

TITANO BOLLARD AND TABLE LAMPS

KURT



Powder-coated aluminum base and body. Clear tempered glass diffuser. Downward lights emission. Colors: anthracite, white, coffee or black.

OUTDOOR IDEAL LUX

kurt

IP54

LED 11W | 1050/1100 lm | 30.000 h life.



1,930 Kg / 0,0066 m³

Installation

Bollard			
CCT	Finish	Code	€
3000K	White	306841	127
4000K	White	294049	127
3000K	Anthracite	306834	127
4000K	Anthracite	294025	127
3000K	Black	306872	127
4000K	Black	293172	127
3000K	Coffee	306858	127
4000K	Coffee	294001	127

KURT BOLLARD AND TABLE LAMPS

TESLA




Tesla is luminous
essentiality
with a strong,
contemporary
character. An ideal
solution for those
seeking functionality
and style in a single
lighting gesture.

Powder painted aluminum body.
White plastic screen diffuser.
Downward light emission.
Available finishes: anthracite,
white, coffee or black.

tesla

IP44



3,000 Kg / 0,0366 m³



2,560 Kg / 0,0278 m³

Installation

Bollard

Finish	Code	€
White	153179	155
Anthracite	153162	155
Black	316055	155
Coffee	326924	155

Recommended bulb G9 max 4 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

Finish	Code	€
White	153209	145
Anthracite	153193	145
Black	326917	145
Coffee	316048	145

Recommended bulb G9 max 4 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10


GAS



Powder coated die-cast aluminum body. Tempered and sandblasted clear glass diffuser. Available finishes: anthracite, white, coffee, grey or black.

gas

IP43



1,790 Kg / 0,0214 m³

Installation

Bollard			
Finish		Code	€
	Anthracite	139470	116
	Black	322421	116
	Coffee	213101	116
Recommended bulb GU10 max 1 x 35W			
Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

HUB




Powder coated aluminum base, pole and body. Orientable diffuser with clear tempered glass screen. Supplied with picket for installation on the ground. Available finish: anthracite.

IDEAL LUX
OUTDOOR

hub

IP54

LED 4,5W | 390 lm 3000 K | 30.000 h life




0,850 Kg / 0,0065 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	● Anthracite	251257	134



0,720 Kg / 0,0076 m³

CCT	Finish	Code	€
3000K	● Anthracite	251226	122

Base

Not included

Optional



Finish	Code	€
● Anthracite	251295	32

HUB BOLLARD AND TABLE LAMPS

TIFONE



Powder coated die-cast aluminum base and frame with anthracite finish. Clear tempered glass diffuser. Downward light emission.

IDEAL LUX
OUTDOOR


tifone

IP65

LED 8,5W | 710 lm | 20.000 h life



1,250 Kg / 0,0066 m³



1,010 Kg / 0,0029 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	● Anthracite	250953	124

CCT	Finish	Code	€
3000K	● Anthracite	250977	106

TIFONE BOLLARD AND TABLE LAMPS

VEGA




Aluminum body with matt powder coating. Clear tempered glass diffuser. Available finishes: anthracite, white, coffee, grey or black.

IDEAL LUX
OUTDOOR

vega

IP44



1,150 Kg / 0,0098 m³

Installation

Bollard

Finish	Code	€
White	136035	180
Grey	136042	180
Anthracite	136028	180
Black	136059	180
Coffee	213361	180

Recommended bulb **G9 max 1x15W**

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

VEGA BOLLARD AND TABLE LAMPS

JEDI



Jedi is the outdoor light that guides with discretion and elegance. Available in sophisticated anthracite or black finishes, it is the ideal choice for enhancing gardens, pathways and relaxation areas with a touch of contemporary design.

Powder-coated aluminium base and body. Shiny opal color polycarbonate diffuser. Supplied with piquet for ground installation. Available finishes: anthracite, black, coffee.


jedi



IP65



LED 25W | 2600 lm | 50.000 h life



1,280 Kg / 0,0065 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	Anthracite	306803	163
3000K	Black	293202	163
3000K	Coffee	372297	163



IP65



LED 19W | 2050 lm | 50.000 h life



1,030 Kg / 0,0050 m³

Installation

Bollard


CCT	Finish	Code	€
3000K	Anthracite	306797	131
3000K	Black	293196	131
3000K	Coffee	372280	131



IP65



LED 12W | 1250 lm | 50.000 h life



0,760 Kg / 0,0036 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	Anthracite	306780	95
3000K	Black	293189	95
3000K	Coffee	372273	95






IP65



LED 7W | 720 lm | 50.000 h life



0,440 Kg / 0,0022 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	Anthracite	363721	74
3000K	Black	372266	74
3000K	Coffee	372259	74

Base

Not included

Optional



Finish	Code	€
Anthracite	308227	13
Black	308234	13
Coffee	372242	13

BOEING



Powder coated die-cast aluminum body. Diffuser made of an external smoked clear polycarbonate protection and satin opal acrylic inner element which orientate the light downward.
Colors: anthracite, coffee, black.

IDEAL LUX
OUTDOOR

boeing

IP65

LED 14W | 1700 lm | 50.000 h life.

Installation


Bollard

CCT	Finish	Code	€
3000K	● Anthracite	327266	210
3000K	● Black	346731	210
3000K	● Coffee	346724	210



4,000 Kg / 0,0203 m³

CCT	Finish	Code	€
3000K	● Anthracite	327259	180
3000K	● Black	346717	180
3000K	● Coffee	346700	180



3,100 Kg / 0,0164 m³

CCT	Finish	Code	€
3000K	● Anthracite	327242	160
3000K	● Black	346694	160
3000K	● Coffee	346687	160



2,200 Kg / 0,0090 m³

CCT	Finish	Code	€
3000K	● Anthracite	346656	140
3000K	● Black	346670	140
3000K	● Coffee	346663	140



1,350 Kg / 0,0037 m³

BOEING BOLLARD AND TABLE LAMPS





14W
H 150

14W
H 400

14W
H 700

14W
H 1000

TRONCO



Varnished die-cast aluminum body with different finishes: anthracite, white, coffee, grey or black. Pyrex glass diffuser with aluminum elements inside.

tronco



2,490 Kg / 0,0254 m³

Installation

Bollard

Finish	Code	€
White	109138	160
Grey	026961	160
Anthracite	026992	160
Black	004723	160
Coffee	163741	160

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2




1,970 Kg / 0,0185 m³

Finish	Code	€
White	109145	138
Grey	026954	138
Anthracite	026985	138
Black	004730	138
Coffee	163758	138

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2



0,590 Kg / 0,0124 m³

Finish	Code	€
White	248264	125
Grey	248288	125
Anthracite	248257	125
Black	248295	125
Coffee	248271	125

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2



1,200 Kg / 0,0078 m³

Finish	Code	€
White	366050	109
Grey	369815	109
Anthracite	369761	109
Black	369846	109
Coffee	369792	109

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2

ATENA




High performance resin body
and diffuser: resistant to corrosion,
colors stabilized during U.V. rays
treatment, resistant to temperatures
between -60° C and +90° C.

IDEAL LUX
OUTDOOR

atena

IP55



1,070 Kg / 0,0220 m³

Installation

Bollard

Finish	Code	€
White	198644	87
Grey	198637	87
Black	198620	87

Included bulb LED E27 8W Goccia

Lumen	CCT	Code	€
-	2700/4000/ 6500 K	-	-

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

ATENA BOLLARD AND TABLE LAMPS


EDO



Die-cast aluminum structure
finished with anthracite, white
or coffee powder coating.
White polycarbonate diffuser.

edo

IP65



1,600 Kg / 0,0257 m³

Installation

Bollard

Finish	Code	€
White	135755	139
Anthracite	138510	139
Coffee	213071	139


Recommended bulb GX53 max 1x15W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

Finish	Code	€
White	142999	139
Anthracite	135762	139
Coffee	213088	139

Recommended bulb GX53 max 1x15W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5



2,670 Kg / 0,0243 m³

ETERE



Powder coated die-cast aluminum body. Satin opal polycarbonate glass diffusers. Black PVC cables. Colors: anthracite, coffee or black.

IDEAL LUX
OUTDOOR

ETERE BOLLARD AND TABLE LAMPS

etere

 IP44

 LED 9,5W | 1000/1100 lm | 25.000 h life





1,100 Kg / 0,0099 m³

Installation			
Bollard			
CCT	Finish	Code	€
3000K	 Anthracite	246932	121
4000K	 Anthracite	172439	121
3000K	 Black	322261	121
4000K	 Black	322278	121
3000K	 Coffee	269160	121
4000K	 Coffee	246956	121


TORRE



Turned powder painted aluminum body with anthracite, white, coffee, grey or black. Plastic diffuser with opal effect.

torre

IP65



2,600 Kg / 0,0306 m³

Installation

Bollard

Finish	Code	€
● Grey	321851	180
● Anthracite	321882	180
● Black	321639	180
● Coffee	321868	180

Recommended bulb E27 max 1 x 15W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2



2,100 Kg / 0,0242 m³

Finish	Code	€
● Grey	321905	168
● Anthracite	162492	168
● Black	186955	168
● Coffee	321929	168

Recommended bulb E27 max 1 x 15W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2



0,870 Kg / 0,0056 m³

Finish	Code	€
● Grey	321950	144
● Anthracite	158891	144
● Black	186979	144
● Coffee	321981	144

Recommended bulb E27 max 1 x 15W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

COSMO



Resin body resistant to corrosion,
UV and temperature between
-60° and +90° C. Anti-yellowing
transparent diffuser.

IDEAL LUX
OUTDOOR

cosmo

IP55



2,150 Kg / 0,0220 m³

Installation

Bollard

Finish	Code	€
White	187877	121
Grey	187884	121
Black	187891	121

Included bulb LED GX53 10W

Lumen	CCT	Code	€
-	300/4000/ 6500 K	-	-

Recommended bulb GX53 max 1 x 10W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

COSMO BOLLARD AND TABLE LAMPS

CLIO



clio

IP44



1,360 Kg / 0,0081 m³


Installation

Bollard

Finish	Code	€
White	249469	95
Anthracite	249452	95
Black	249483	95
Coffee	328829	95

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2



7,250 Kg / 0,0403m³


Finish	Code	€
White	249506	285
Anthracite	249490	285
Black	249520	285
Coffee	328836	285

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2


Diffuser

Finish	Code	€
White	145068	40




0,540 Kg / 0,0177 m³

Finish	Code	€
White	116716	40




0,520 Kg / 0,0147 m³

Finish	Code	€
White	145020	40



0,610 Kg / 0,0221 m³

THOR

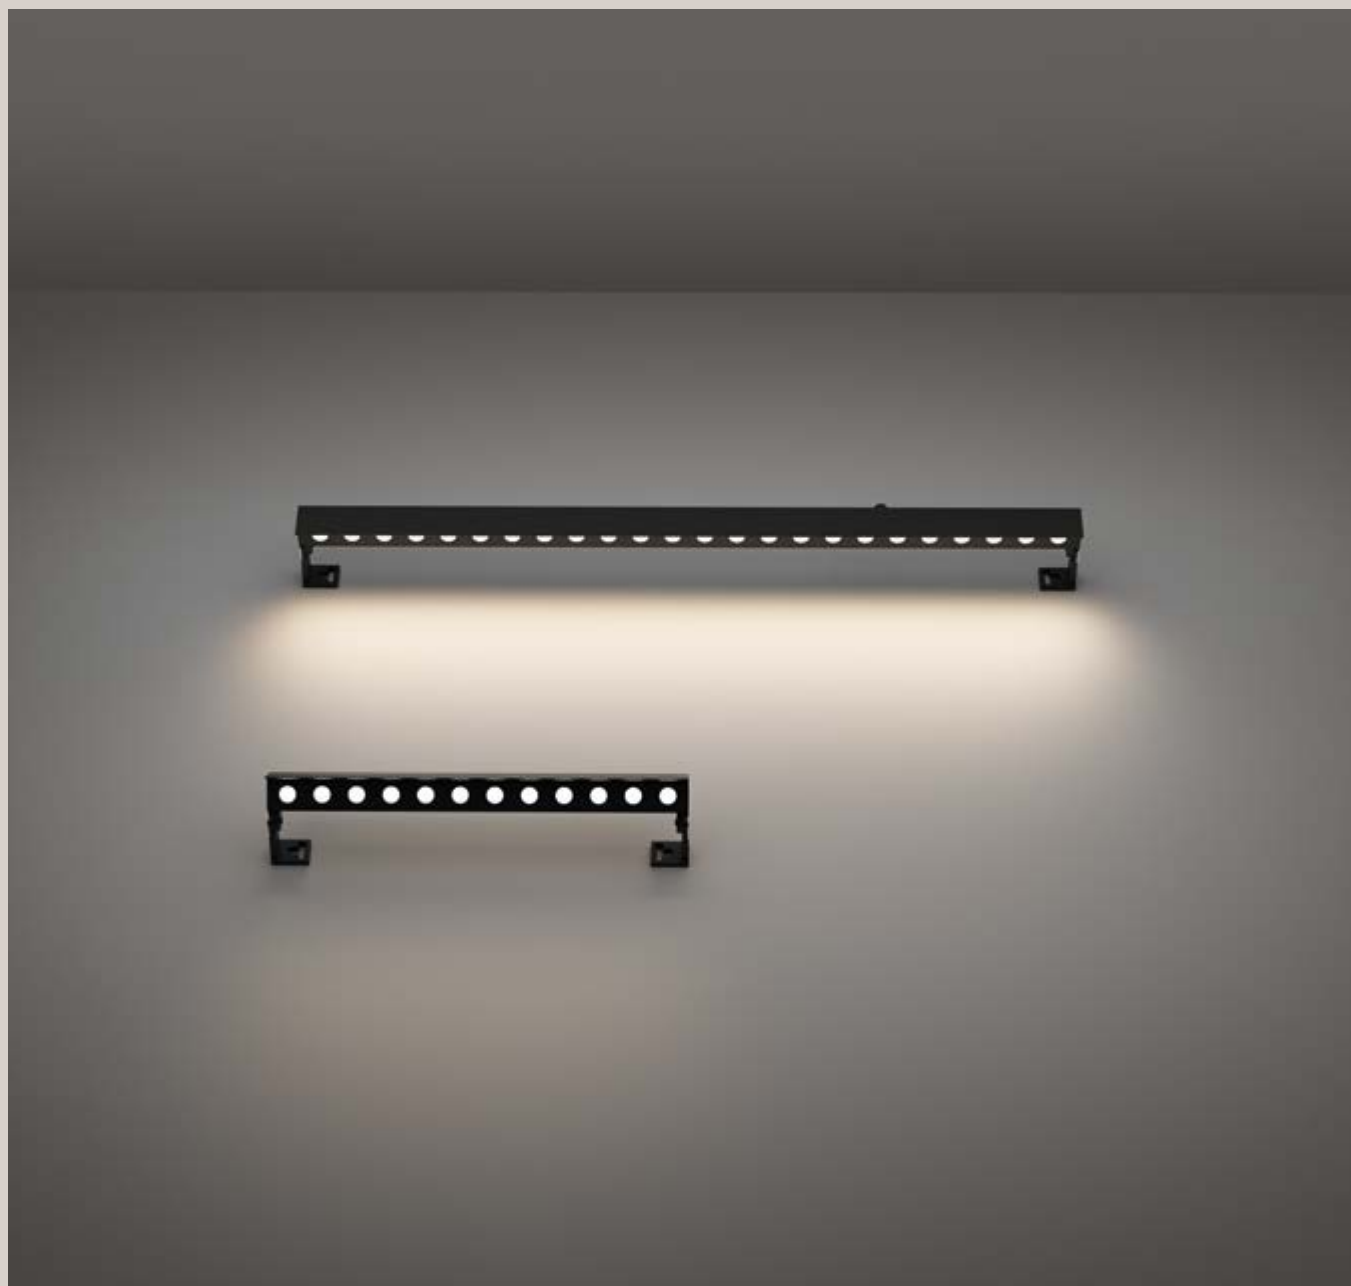

Adjustable linear projector
for surface installation
with oblique light effect.

thor




IP65



LED SMD | 50.000 h life




Material: Aluminum



1,490 Kg/0,0088 m³

Power	Installation	Beam	CRI	SDCM	
20W	Wall Ceiling Floor	28°	≥90	3	
Control	Lumen	CCT	Finish	Code	€
On-Off	2100 lm	3000 K	● Anthracite	261331	218
Cable lenght			Driver		
500 mm			Separate - not included		



2,460 Kg/0,0176 m³

Power	Installation	Beam	CRI	SDCM	
40W	Wall Ceiling Floor	28°	≥90	3	
Control	Lumen	CCT	Finish	Code	€
On-Off	4200 lm	3000 K	● Anthracite	261355	330
Cable lenght			Driver		
500 mm			Separate - not included		

Visor



Model	Optional	Finish	Code	€
20W	Not included	● Anthracite	261362	18
40W	Not included	● Anthracite	261379	30

Driver ON/OFF | Not included - Required

Power	Output	Measure	Code	€
40W	24 Vdc	171 x 37 x 61 mm	272108	100
100W	24 Vdc	220 x 39 x 68 mm	226200	190
185W	24 Vdc	220 x 39 x 68 mm	226217	210

IDEAL LUX

OUTDOOR

THOR SPOTLIGHT

Adjustable linear projector for surface installation with oblique light effect. Die-cast aluminum body, clear glass diffuser, 24 Vdc power supply DC, IP65 protection index, IK06 impact resistance. SMD LED technology; CCT 3000 K, CRI ≥ 90 , SDCM ≤ 3 ; LED useful life 50.000 h L70B50. Optionally available with anti-glare visor.





O-ZONE



o-zone

IP66 LED LED 19W 1700 lm 50.000 h life.
--

STARLIGHT



Aluminum adjustable tracklight
with ceiling or peg installation;
dark gray anodized and powder
coated surface.


starlight

IP67

LED COB | 50.000 h life

PRO

Material: Aluminum



0,280 Kg/0,0011 m³


Power	Installation	Beam	CRI	SDCM	
5,5W	Wall Ceiling Floor	30°	≥90	3	
Control	Lumen	CCT	Finish	Code	€
On-Off	470 lm	3000 K	● Dark gray	248394	122
On-Off	560 lm	4000 K	● Dark gray	245041	122
			Driver		
			Not included		

IP67

LED COB | 50.000 h life

PRO


Material: Aluminum



0,950 Kg/0,0019 m³

Power	Installation		Beam	CRI	SDCM
10W	Wall Ceiling Floor		30°	≥90	3
Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	● Dark gray	248387	254
On-Off	1250 lm	4000 K	● Dark gray	245072	254
			Driver		
			Not included		



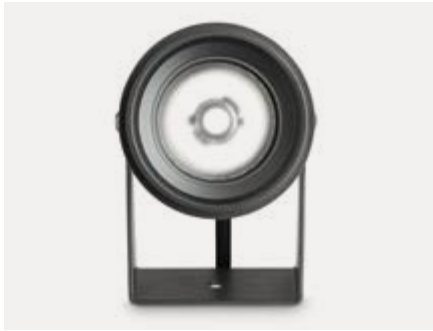

OUTDOOR

	Visor				
	Model	Optional	Finish	Code	€
	5,5W	Not included	● Dark gray	245096	35
	10W	Not included	● Dark gray	245102	35
	Peg				
	Model	Optional	Finish	Code	€
	5,5W	Not included	● Dark gray	245089	18
	10W	Not included	● Dark gray	245089	18
	On-Off Driver Not included - Required				
	Power	Output	Measure	Code	€
	20 W	24 Vdc	118 x 26 x 35 mm	226187	75
	40W	24 Vdc	148 x 30 x 40 mm	226194	80
	100W	24 Vdc	220 x 39 x 68 mm	226200	190
	185W	24 Vdc	220 x 39 x 68 mm	226217	210


STARLIGHT SPOTLIGHT

KOALA



IP65

LED 7 W | 630 lm | 35.000 h life



0,640 Kg / 0,0014 m³


Installation

Wall

CCT	Finish	Code	€
3000K	● Black	345666	81

IP65

LED 3 W | 250 lm | 35.000 h life



0,520 Kg / 0,0014 m³


Installation

Wall

CCT	Finish	Code	€
3000K	● Black	331355	66

IP65

LED 7 W | 630 lm | 35.000 h life



0,600 Kg / 0,0014 m³


Installation

Floor

CCT	Finish	Code	€
3000K	● Black	331386	76

IP65

LED 7 W | 630 lm | 35.000 h life



0,600 Kg / 0,0014 m³

Installation

Floor

CCT	Finish	Code	€
3000K	● Black	349596	76

On-Off Driver | Not included - Required

Power	Output	Measure	Code	€
20 W	24 Vdc	118 x 26 x 35 mm	226187	75
40W	24 Vdc	148 x 30 x 40 mm	226194	80
100W	24 Vdc	220 x 39 x 68 mm	226200	190
185W	24 Vdc	220 x 39 x 68 mm	226217	210



Powder coated die-cast aluminum body.
Clear tempered glass diffuser. Available with
base for wall and floor
fixing and with strap
for trees and poles fixing.



ULEX




ulex

IP65

LED SMD OSRAM | 50.000 h life

PRO

Material: Aluminum




0,660 Kg/0,0030 m³

Power	Installation	Beam	CRI
8,5W	Wall Ceiling Floor	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	550 lm	3000 K	● Anthracite	261287	147

Cable lenght	Driver
2000 mm	ON/OFF Included



1,190 Kg/0,0036 m³

Power	Installation	Beam	CRI
15W	Wall Ceiling Floor	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1150 lm	3000 K	● Anthracite	261294	223

Cable lenght	Driver
2000 mm	ON/OFF included



Optional	Power	Finish	Code	€
Not included	8,5W	● Anthracite	268163	14
Not included	15W	● Anthracite	268194	17

Visor



Optional	Power	Finish	Code	€
Not included	8,5W	● Anthracite	268170	17
Not included	15W	● Anthracite	268200	25

IDEAL LUX

OUTDOOR

ULEX SPOTLIGHT

535





Orientable projector for surface installation, suited for a general or accent outdoor lighting. Die-cast aluminum body, clear glass diffuser. Optionally available with wiring base, piquet for ground installation and anti-glare installation.



SIRIO




Adjustable powder-coated die-cast aluminum body. Clear tempered glass diffuser.

IDEAL LUX

OUTDOOR

sirio

IP65



1,070 Kg / 0,0025 m³

Installation

Wall | Floor

Finish	Code	€
White	345628	100
Grey	345642	100
Anthracite	318233	100
Black	345659	100
Coffee	345635	100

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

SIRIO SPOTLIGHT

TERRA




Cast aluminum painted
frame. Adjustable body.
Transparent Pyrex glass
diffuser.

IDEAL LUX
OUTDOOR

terra

IP65



1,230 Kg / 0,0094 m³


Installation

Floor

Finish	Code	€
● Anthracite	033044	96
● Coffee	321622	96

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2



0,520 Kg / 0,0042 m³

Finish	Code	€
● White	106205	59
● Anthracite	033037	59
● Black	046211	59
● Coffee	163727	59

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

TERRA SPOTLIGHT

ELIO



High performance resin body
and diffuser: resistant to corrosion
caused by both atmospheric agents
and chemical fertilizers, colors
stabilized during UV rays treatment,
thermal shock resistance from
-60° to +90°C. Adjustable diffuser.


OUTDOOR IDEAL LUX

ELIO SPOTLIGHT

elio

IP66

LED



0,360 Kg / 0,0027 m³

Installation

Floor			
Finish		Code	€
 White		120218	82
 Black		120201	82
Included bulb LED GU10 3,5W			
Lumen	CCT	Code	€
-	2700/4000 K	-	-
Recommended bulb LED GU10 max 1x6W			
Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

LITIO




High performance resin body and diffuser: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C. Adjustable diffuser.

IDEAL LUX
OUTDOOR

LITIO SPOTLIGHT

litio



0,730 Kg / 0,0046 m³

Installation

Floor

Finish	Code	€
White	145310	94
Grey	145334	94
Black	145358	94

Included bulb GX53 10W

Lumen	CCT	Code	€
-	3000/4000/6500 K	-	-

Recommended bulb GX53 max 1 x 10W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

INSIDE




Powder coated cast aluminum frame with anthracite, coffee or grey finish. Adjustable body. Clear Pyrex glass diffuser. Provided with peg to plant in the ground.

IDEAL LUX
OUTDOOR

INSIDE SPOTLIGHT

inside

IP54



0,370 Kg / 0,0019 m³


Installation

Floor		
Finish	Code	€
● Anthracite	115412	40
● Black	115429	40
● Coffee	247045	40

Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

BIT

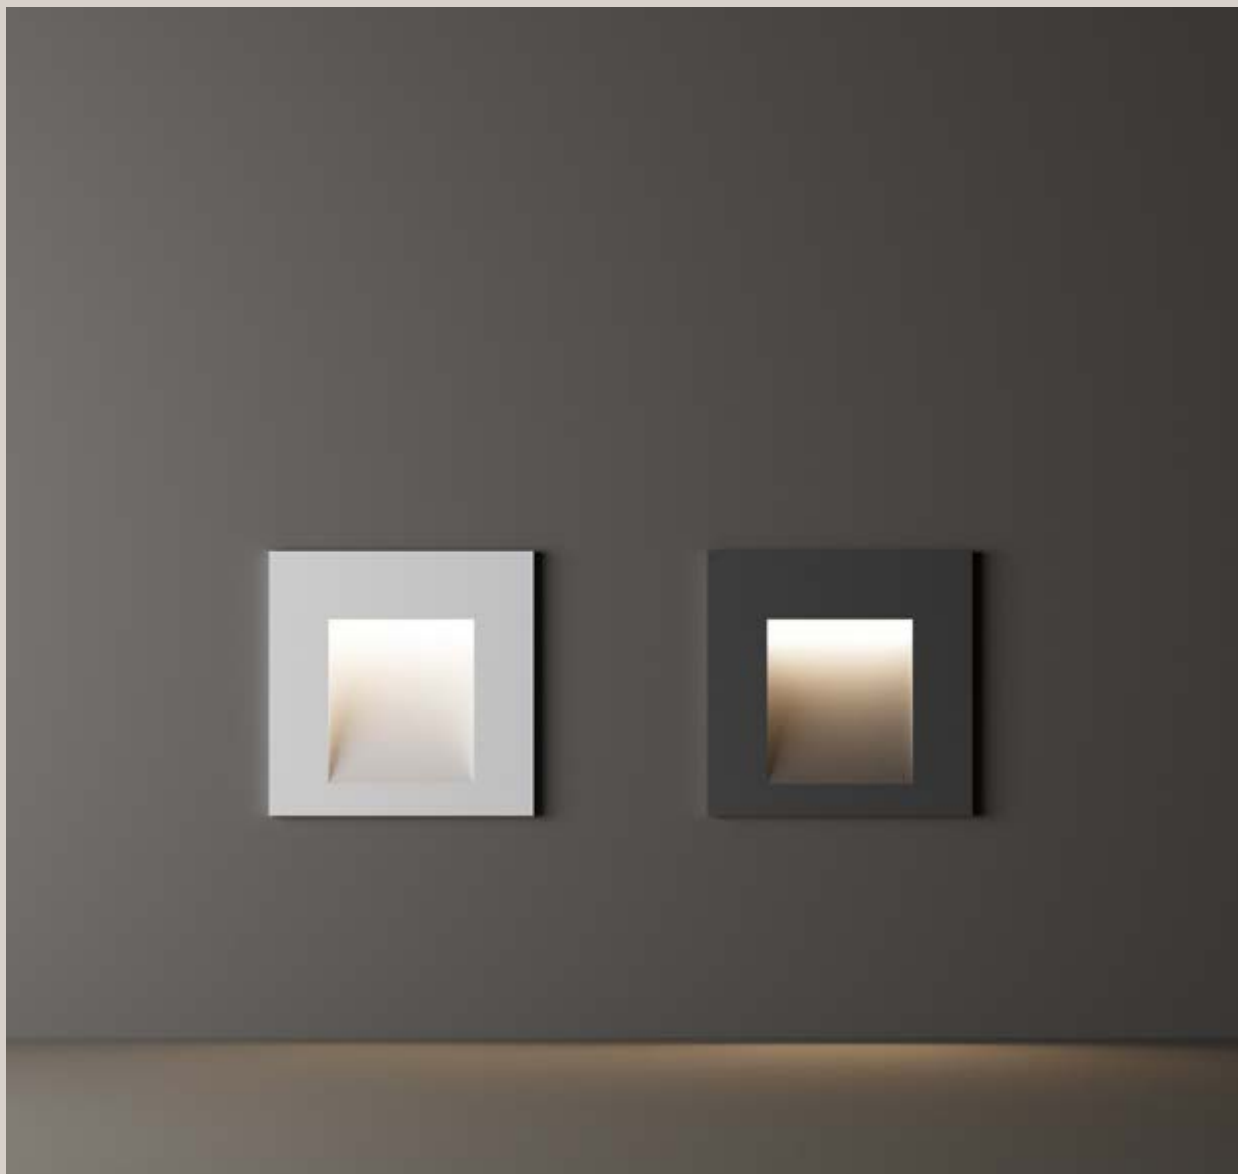

Recessed body made of powder coated die-cast aluminum.
Clear tempered glass diffuser.


IDEAL LUX

OUTDOOR

bit

IP65

LED 3W | 450 lm 3000 K | 35.000 h life




0,300 Kg / 0,0006 m³

Installation

Recessed lights

Finish	Code	€
White	269023	55
Anthracite	269009	55

Driver | Not included - Required



Code	€
276205	12

BIT RECESSED LIGHTS

WIRE



Recessed body made of powder coated die-cast aluminum.
Clear tempered glass diffuser.


IDEAL LUX

OUTDOOR

wire

IP65

LED 4W | 180 lm | 20.000 h life



0,460 Kg / 0,0018 m³


Installation

Recessed lights

CCT	Finish	Code	€
3000K	White	268989	57
3000K	Anthracite	255514	57

IP65

LED 1,5W | 90 lm | 20.000 h life



0,220 Kg / 0,0009 m³


Installation

Recessed lights

CCT	Finish	Code	€
3000K	White	268996	39
3000K	Anthracite	255521	39



WIRE RECESSED LIGHTS


THOR

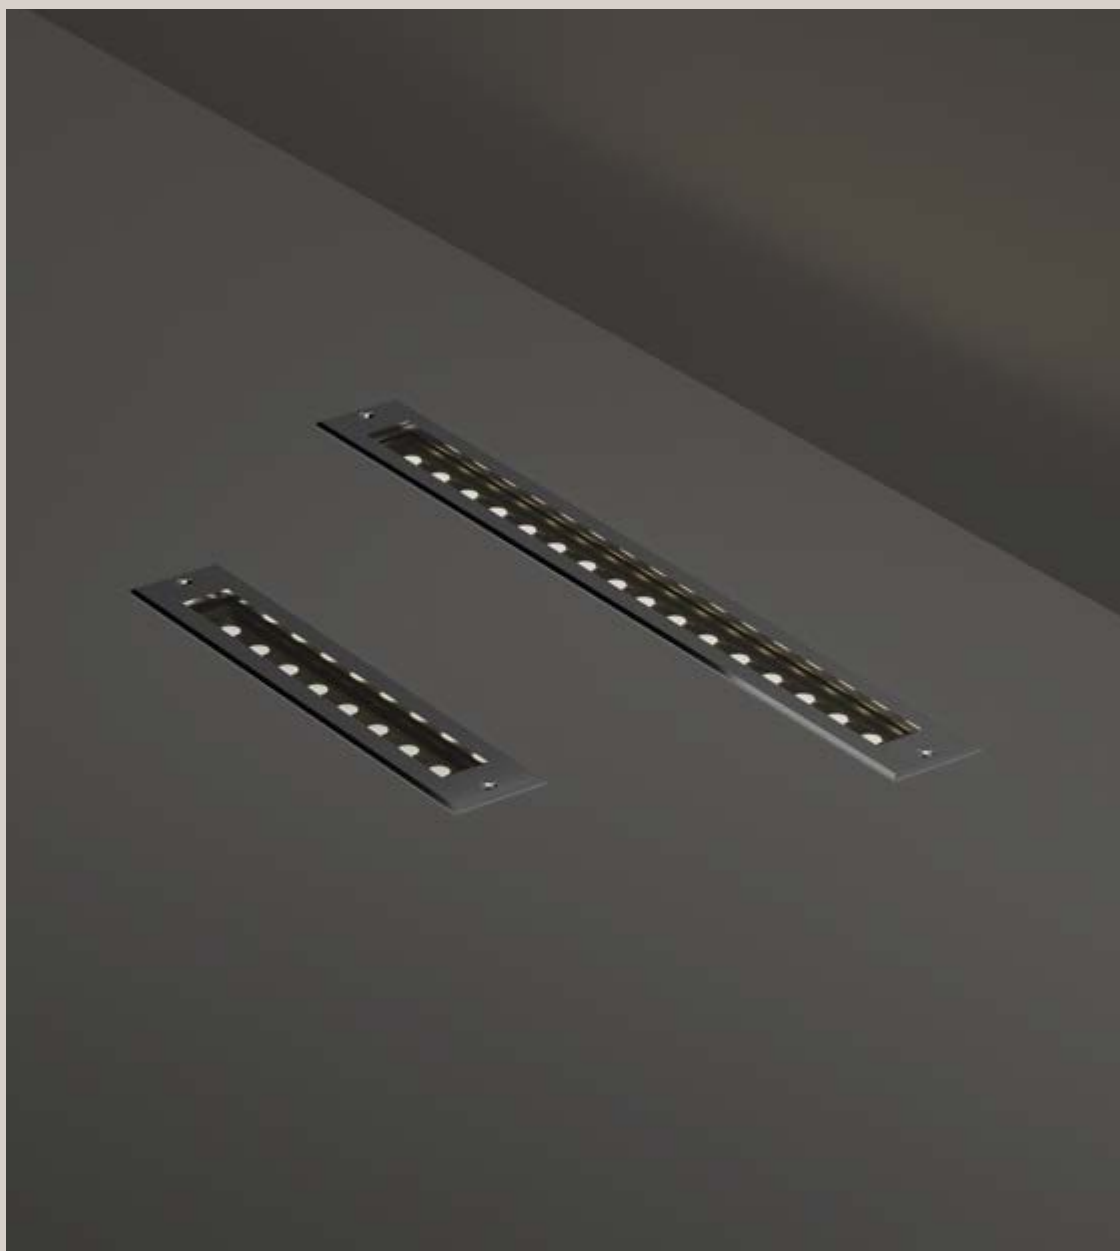

Linear projector for floor recessed installation.
Die-cast aluminum body, 316L stainless steel
ring, glass diffuser, IP67 protection index,
IK08 impact resistance, formwork included.
Optical block adjustable by +/- 20°
for asymmetric light effect.

thor

 IP67		 LED SMD 50.000 h life		 Item made of stainless steel 316		Material: Aluminum						
  	Power		Installation		CRI		SDCM					
	19W		Recessed lights		≥90		3					
	Control		Lumen		CCT		Finish		Code		€	
	On-Off		1700 lm		3000 K		 Steel		351285		415	

  	Power		Installation		CRI		SDCM					
	10W		Recessed lights		≥90		3					
	Control		Lumen		CCT		Finish		Code		€	
	On-Off		850 lm		3000 K		 Steel		351278		250	

FLOOR




Outdoor unmovable recessed fitting made of die cast aluminum with round ring available in three dimensions. Suitable for ground and floor installation. Anodized aluminum finish with extra-clear tempered glass diffuser. Integrated LED passively cooled with 30° optics; available color temperature of 3000 k and CRI ≥ 80; protection degree IP 67; IK10.

IDEAL LUX
OUTDOOR

floor

IP67

LED 12W | 1340 Lm | 25.000 h life



0,960 Kg / 0,0049 m³


Installation

Recessed lights

CCT	Finish	Code	€
3000K	Steel	255682	106

IP67

LED 6W | 670 Lm | 25.000 h life



0,640 Kg / 0,0025 m³


Installation

Recessed lights

CCT	Finish	Code	€
3000K	Steel	255668	73

IP67

LED 3,5W | 330 Lm | 25.000 h life



0,390 Kg / 0,0016 m³

Installation

Recessed lights

CCT	Finish	Code	€
3000K	Steel	255651	55

FLOOR RECESSED LIGHTS

TAURUS

Taurus is the recessed projector designed for floor, wall or ceiling installation, designed for applications requiring strength, precision and versatility.




taurus

IP67

LED SMD | 50.000 h life


Item made of stainless steel 316

Material: Aluminum




1,460 Kg/0,0067 m³

Power	Installation	CRI			
6W	Recessed lights	≥90			
Control	Lumen	CCT	Finish	Code	€
On-Off	450 lm	3000 K	 Steel	277004	210
			Driver		
			ON/OFF Included		




1,980 Kg/0,0082 m³

Power	Installation	CRI			
11W	Recessed lights	≥90			
Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	 Steel	277011	320
			Driver		
			ON/OFF Included		



3,250 Kg/0,0142 m³

Power	Installation		CRI			
12W	Recessed lights		≥90			
Control	Lumen	CCT	Finish		Code	€
On-Off	1350 lm	3000 K	 Steel		277028	405
			Driver			
			ON/OFF Included			



3,500 Kg/0,0169 m³

Power	Installation		CRI		
20W	Recessed lights		≥90		
Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	 Steel	277035	530
			Driver		
			ON/OFF Included		

Die-cast aluminum body,
316L stainless steel ring, glass
diffuser, walkable (IP67, IK10),
formwork included. Light modules
individually adjustable $\pm 30^\circ$ using
an external pin to narrow or direct
the light beam.






PARK




Recessed spotlight. PVC external body. Aluminum reflecting parabola. Glazed steel glass-setting frame. Clear glass. Walkable.

park


IP67



1,210 Kg / 0,0064 m³



0,580 Kg / 0,0026 m³



0,600 Kg / 0,0022 m³

Installation

Recessed lights

Finish	Code	€
Steel	032825	85

Recommended bulb E27 max 1 x 28W

Lumen	CCT	Code	€
980 lm	4000 K	153964	3,50

Finish	Code	€
Steel	032832	57

Recommended bulb GU10 max 1 x 20W


Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

Finish	Code	€
Steel	351780	51

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

IP54



0,900 Kg / 0,0031 m³

Installation


Recessed lights

Finish	Code	€
Steel	117881	80

Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

IP67



0,650 Kg / 0,0022 m³

Installation

Recessed lights

Finish	Code	€
Steel	351797	59

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50



WAY



Family of recessed floor projectors for outdoor use, walkable or driveable, suitable for harsh environmental conditions. Body and diffuser in high-performance, anti-corrosion and UV-stabilised resin. Resistance to temperature changes from -60 °C to +90 °C; class II, IP67.

way



Installation

Recessed lights

Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,10 Kg	0,0006 m ³	● Black	269726	32
	Single	0,08 Kg	0,0005 m ³	● Black	269504	32
	Double	0,08 Kg	0,0006 m ³	● Black	269702	32
Square	Wide	0,08 Kg	0,0006 m ³	● Black	351513	32

Included bulb G9 1,7W

Lumen	CCT	Code	€
-	3000 K	-	-

Recommended bulb G9 max 1 x 2W

Lumen	CCT	Code	€
150 lm	3000 K	270104	6,50
160 lm	4000 K	270111	6,50



Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,27 Kg	0,0019 m ³	● Black	120249	65
	Double	0,26 Kg	0,0018 m ³	● Black	120287	65
	Triple	0,27 Kg	0,0019 m ³	● Black	351575	65
Square	Wide	0,27 Kg	0,0018 m ³	● Black	120317	65

Included bulb GU10 max 3,5W

Lumen	CCT	Code	€
-	Settable	-	-

Recommended bulb GU10 max 1 x 6W


Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50



From above: wide, single,
double and triple.



Installation						
Recessed lights						
Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,37 Kg	0,0023 m³	● Black	351544	72
	Double	0,35 Kg	0,0022 m³	● Black	351551	72
	Triple	0,37 Kg	0,0022 m³	● Black	351582	72
Square	Wide	0,36 Kg	0,0022 m³	● Black	351537	72
Included bulb GX53 max 10W						
Lumen	CCT				Code	€
-	Settable				-	-
Recommended bulb GX53 max 1 x 3W						
Lumen	CCT				Code	€
1000 lm	4000 K				154008	5



Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,67 Kg	0,0044 m³	● Black	120324	95
	Double	0,75 Kg	0,0044 m³	● Black	351568	115
	Triple	0,74 Kg	0,0042 m³	● Black	120362	115
Square	Wide	0,70 Kg	0,0042 m³	● Black	120386	95
Included bulb GX53 max 10W						
Lumen		CCT			Code	€
-		Settable			-	-
Recommended bulb GX53 max 1 x 10W						
Lumen		CCT			Code	€
1000 lm		4000 K			154008	5

ROCKET



Light body in steel (diameters 92 and 55)
or aluminum (diameters 40 and 28).
Diffuser in tempered glass. Walkable.

rocket




IP67



LED SMD/COB | 30.000 h life

Material: Aluminum




0,210 Kg/0,0006 m³

Power	Installation	CRI	SDCM
1,3W	Recessed lights	≥90	3

Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	100 lm	3000 K	Steel	325132	45
On-Off	Wide	110 lm	4000 K	Steel	371061	45

Driver

Not included




0,210 Kg/0,0006 m³

Power	Installation	CRI	SDCM
2,5W	Recessed lights	≥90	3

Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	180 lm	3000 K	Steel	325156	65
On-Off	Wide	200 lm	4000 K	Steel	371085	65

Driver

Not included




wide 0,360 Kg / 0,0008 m³
single 0,400 Kg / 0,0008 m³
double 0,380 Kg / 0,0008 m³

Power	Installation	CRI	SDCM
2W	Recessed lights	≥90	3

Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	130 lm	3000 K	Steel	370989	100
On-Off	Wide	160 lm	4000 K	Steel	212647	100
On-Off	Single	130 lm	3000 K	Steel	371016	130
On-Off	Single	160 lm	4000 K	Steel	222820	130
On-Off	Double	130 lm	3000 K	Steel	371047	150
On-Off	Double	160 lm	4000 K	Steel	222837	150

Driver

Not included

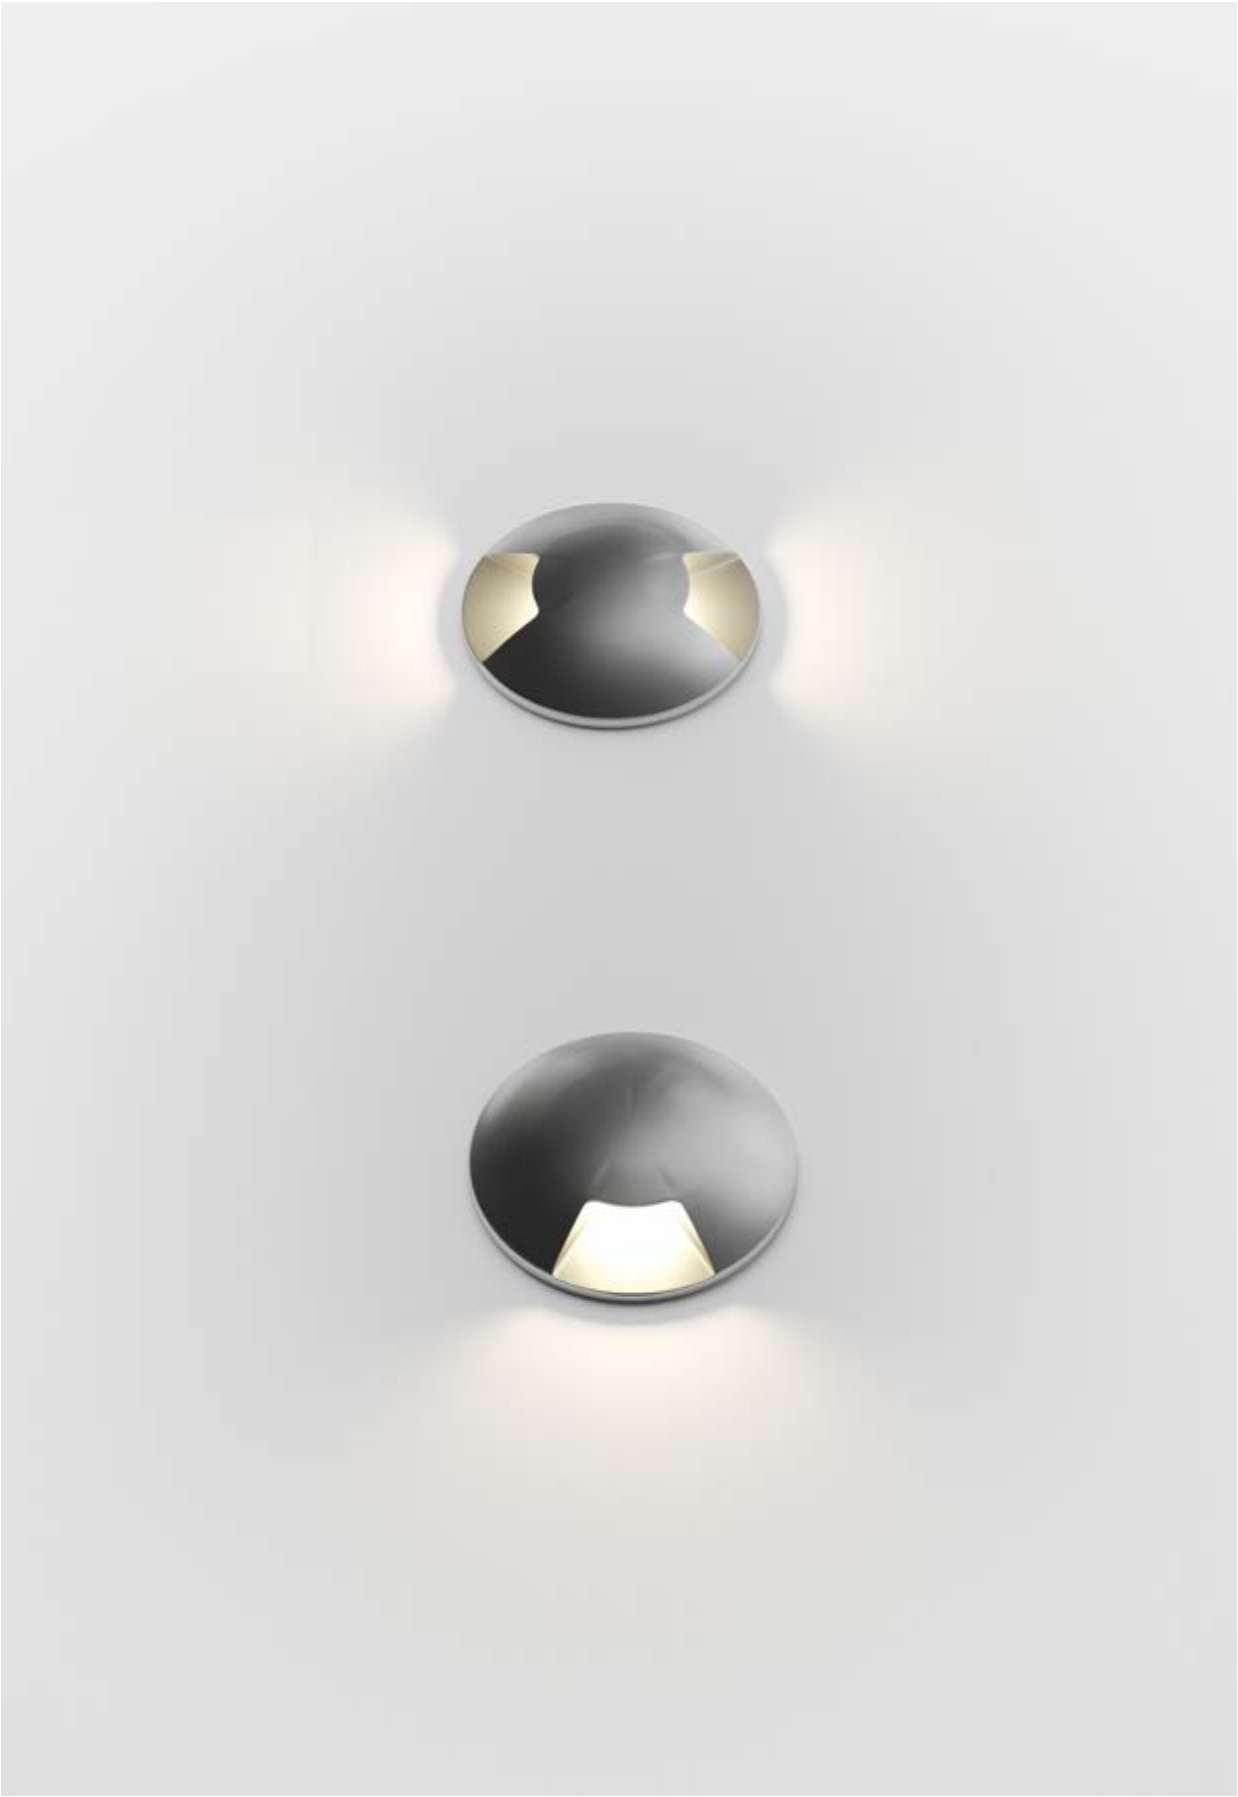


OUTDOOR



IP67

LED SMD/COB | 30.000 h life

Material: Aluminum



wide 1,250 Kg / 0,0038 m³
single 0,560 Kg / 0,0034 m³
double 0,560 Kg / 0,0034 m³

Power	Installation	CRI	SDCM
3W	Recessed lights	≥90	3

Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	900 lm	3000 K	Steel	370996	150
On-Off	Wide	930 lm	4000 K	Steel	371009	150
On-Off	Single	260 lm	3000 K	Steel	247144	153
On-Off	Single	280 lm	4000 K	Steel	122014	153
On-Off	Double	260 lm	3000 K	Steel	247151	158
On-Off	Double	280 lm	4000 K	Steel	122021	158

Driver
Not included in the models 370996 and 371009



Driver | Not included - Required

Power	Output	Measure	Code	€
3 W	24 Vdc	47 x 23 x 21 mm	325163	10
3,5 W	24 Vdc	45 x 21 x 23mm	276205	12
20 W	24 Vdc	118 x 26 x 35 mm	226187	75
40 W	24 Vdc	48 x 30 x 40 mm	226194	80
100 W	24 Vdc	220 x 39 x 68 mm	226200	190
185 W	24 Vdc	220 x 39 x 68 mm	226217	210



OUTDOOR

E14	576
E27	578
G4	584
G9	585
GX53	586
R7s	587
GU10	588
Kit emergency	590









LAM

PA






DINE

Lampadine E14

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 		4 W	480 lm	3000 K	80		25.000 h	10	101200	2,00
		4 W	400 lm	3000 K	80	TRIAC	15.000 h	10	188935	2,50
		4 W	520 lm	4000 K	80		25.000 h	10	153926	2,00
		4 W	440 lm	3000 K	90		25.000 h	10	271620	2,00
 		4 W	340 lm	2200 K	80		15.000 h	10	151656	2,00
 		4 W	410 lm	3000 K	80		25.000 h	10	101217	2,00
		4 W	340 lm	3000 K	80	TRIAC	25.000 h	10	289229	2,50
		4 W	480 lm	4000 K	80		25.000 h	10	253411	2,00
		4 W	340 lm	3000 K	90		25.000 h	10	289212	2,00
 		6 W	550 lm	3000 K	80		25.000 h	10	151731	2,00
		6 W	580 lm	4000 K	80		25.000 h	10	151946	2,00
 		4 W	370 lm	3000 K	80		25.000 h	10	101262	2,00
 		4 W	350 lm	3000 K	80		25.000 h	10	101255	2,50
 		4 W	470 lm	3000 K	80		25.000 h	10	101248	2,00
		4 W	420 lm	3000 K	80	TRIAC	15.000 h	10	188911	2,50
		4 W	490 lm	4000 K	80		25.000 h	10	153940	2,00
 		4 W	400 lm	2200 K	80		15.000 h	10	151663	2,00
 		4 W	440 lm	3000 K	80		25.000 h	10	151793	2,00

Lampadine E14




		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		4 W	470 lm	2700 K	80		25.000 h	10	270944	2,00
		4 W	480 lm	3000 K	80		25.000 h	10	101224	2,00
		4 W	440 lm	3000 K	90		25.000 h	10	271644	2,00
		4 W	320 lm	3000 K	80	TRIAC	15.000 h	10	188928	2,50
		4 W	490 lm	4000 K	80		25.000 h	10	153933	2,00
		4 W	400 lm	2200 K	80		15.000 h	10	151649	2,00
		4 W	440 lm	3000 K	80		25.000 h	10	101231	2,00
		4 W	430 lm	3000 K	80		15.000 h	10	326610	2,00
		6 W	540 lm	3000 K	80		25.000 h	10	151748	2,00
		6 W	560 lm	4000 K	80		25.000 h	10	151953	2,00









Lampadine E27

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		4 W	470 lm	2700 K	80		25.000 h	10	271637	2,00
		4 W	470 lm	3000 K	80		25.000 h	10	101279	2,00
		4 W	400 lm	3000 K	80	TRIAC	15.000 h	10	188942	2,50
		4 W	490 lm	4000 K	80		25.000 h	10	153957	2,00
		4 W	340 lm	2200 K	80		15.000 h	10	151861	2,50
		4 W	400 lm	3000 K	80		25.000 h	10	101286	2,00
		6 W	550 lm	3000 K	80		25.000 h	10	151755	2,00
		6 W	580 lm	4000 K	80		25.000 h	10	151960	2,00
		4 W	490 lm	3000 K	80		25.000 h	10	101293	2,00
		4W	520 lm	4000 K	80		25.000 h	10	253428	2,00
		8 W	1060 lm	2700 K	80		25.000 h	10	270951	3,50
		8 W	1080 lm	3000 K	80		25.000 h	10	119571	3,50
		8 W	710 lm	3000 K	80	TRIAC	15.000 h	10	188973	5,00
		8 W	980 lm	4000 K	80		25.000 h	10	153964	3,50
		8 W	880 lm	3000 K	90		25.000 h	10	271613	3,50
		10 W	1350 lm	3000 K	80		25.000 h	10	256528	4,50
		10 W	1400 lm	4000 K	80		25.000 h	10	270920	4,50
		10 W	1200 lm	2700 K	90		25.000 h	10	342870	4,50
		4 W	500 lm	3000 K	80		25.000 h	10	335261	2,50
		4 W	370 lm	2200 K	80		15.000 h	10	151687	2,50
		8 W	820 lm	3000 K	80		25.000 h	10	123899	3,50
		8 W	820 lm	3000 K	80	TRIAC	25.000 h	10	252209	5,00
		8 W	840 lm	4000 K	80		25.000 h	10	253459	3,50









Lampadine E27

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		9 W	970 lm	3000 K	80		25.000 h	10	151762	2,00
		9 W	1020 lm	4000 K	80		25.000 h	10	151991	2,00
		8 W	920 lm	3000 K	80		25.000 h	10	305622	5,00
		10 W	1200 lm	3000 K	80		25.000 h	10	305639	4,50
		8 W	810 lm	3000 K	80		25.000 h	10	123882	3,50
		14 W	1450 lm	2700 K	90		25.000 h	10	345857	15,50
		14 W	1650 lm	3000 K	90		25.000 h	10	337135	15,50
		14 W	1750 lm	4000 K	90		25.000 h	10	345864	15,50
		8 W	1100 lm	3000 K	80		25.000 h	10	101323	4,50
		8 W	1050 lm	3000 K	90		25.000 h	10	271606	4,50
		8W	710 lm	3000 K	80	TRIAC	15.000 h	10	188966	6,50
		8 W	1150 lm	4000 K	80		25.000 h	10	153971	4,50
		4 W	550 lm	3000 K	80		25.000 h	10	345840	6,00
		4 W	400 lm	2200 K	80		15.000 h	10	151717	5,00
		4 W	330 lm	2200 K	80	TRIAC	15.000 h	10	223933	6,00
		8 W	950 lm	3000 K	80		25.000 h	10	101330	4,50
		8 W	860 lm	3000 K	80	TRIAC	25.000 h	10	252186	7,00
		8 W	1060 lm	4000 K	80		25.000 h	10	253442	4,50







Lampadine E27

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 		14 W	1630 lm	3000 K	80		25.000 h	10	151779	4,00
		14 W	1820 lm	4000 K	80		25.000 h	10	151977	4,00
 		8 W	900 lm	3000 K	80	TRIAC	15.000 h	10	277790	8,00
 		8 W	1100 lm	3000 K	80		25.000 h	10	157597	8,00
 		8 W	930 lm	3000 K	80		25.000 h	10	135526	6,00
 		8 W	950 lm	2700 K	90		25.000 h	10	342863	7,00
		8 W	1100 lm	3000 K	80		25.000 h	10	101347	6,00
		8 W	860 lm	3000 K	90		25.000 h	10	271590	6,00
		8 W	680 lm	3000 K	80	TRIAC	15.000 h	10	188959	7,00
		8 W	1150 lm	4000 K	80		25.000 h	10	153988	6,00
 		4 W	480 lm	2200 K	80		15.000 h	10	151724	6,00
		4 W	330 lm	2200 K	80	TRIAC	15.000 h	10	223926	7,00
 		18 W	2210 lm	3000 K	80		25.000 h	10	151786	6,00
		18 W	2300 lm	4000 K	80		25.000 h	10	152004	6,00

Lampadine E27

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		8 W	900 lm	3000 K	80	TRIAC	15.000 h	10	277813	10,00
		8 W	1050 lm	3000 K	80		25.000 h	10	157580	10,00
		4 W	330 lm	2200 K	80		15.000 h	10	151700	4,00
		4 W	440 lm	2200 K	80		15.000 h	10	151694	4,00
		4W	330 lm	2200 K	80	TRIAC	15.000 h	10	223919	5,00
		4 W	360 lm	1800 K	80		15.000 h	10	201283	5,00
		4 W	360 lm	1800 K	80		15.000 h	10	201269	9,50
		4 W	360 lm	1800 K	80		15.000 h	10	201290	10,00
		4 W	360 lm	1800 K	80		15.000 h	10	201276	10,00

Lampadine E27

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 		6 W	450 lm	1800 K	80		15.000 h	10	201252	11,00
 		4 W	320 lm	1800 K	80		15.000 h	1	130170	33,00
 		4 W	320 lm	1800 K	80		15.000 h	1	129877	33,00
		4 W	330 lm	2200 K	80	TRIAC	15.000 h	1	223940	33,00
 		4 W	400 lm	2200 K	80		25.000 h	1	130187	25,00
		4 W	330 lm	2200 K	80	TRIAC	15.000 h	1	223834	30,00
 		4 W	320 lm	2200 K	80		25.000 h	1	237251	22,50
 		8 W	800 lm	2200 K	80		25.000 h	1	130163	25,00



Glass satin 135526



Glass 101354



Glass 101323



Glass 345840



Glass 335261



Glass 101286



151694





201252





237251

Lampadine G4

	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 	1,5 W	160 lm	3000 K	80		15.000 h	20	188980	4,50
 	2 W	200 lm	3000 K	80		20.000 h	20	222257	4,00
	2 W	200 lm	3000 K	80	Phase-cut	20.000 h	20	266282	5,00





Lampadine G9

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 		1,7 W	150 lm	3000 K	80		15.000 h	20	270104	6,50
		1,7 W	160 lm	4000 K	80		15.000 h	20	270111	6,50
 		2,5 W	170 lm	3000 K	80		25.000 h	20	122168	3,60
		2,5 W	180 lm	4000 K	80		25.000 h	20	253381	3,60
 		3 W	350 lm	2700 K	80		15.000 h	20	270968	3,60
		3 W	370 lm	3000 K	80		15.000 h	20	209043	3,60
		3 W	350 lm	3000 K	80	TRIAC	25.000 h	20	288215	5,10
		3 W	390 lm	4000 K	80		15.000 h	20	209036	3,60
		3,5 W	310 lm	3000 K	90		15.000 h	20	288208	3,60
 		4 W	500 lm	2700 K	90		15.000 h	20	342887	6,10
		4 W	510 lm	3000 K	80		15.000 h	20	305486	6,10
		3,5 W	420 lm	3000 K	80	TRIAC	15.000 h	20	305431	8,60
		4 W	530 lm	4000 K	80		15.000 h	20	307879	6,10
		3,5 W	440 lm	4000 K	80	TRIAC	15.000 h	20	307886	8,60






Lampadine GX53

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		7 W	730 lm	3000 K	80		25.000 h	10	101385	5,00
		7 W	760 lm	4000 K	80		25.000 h	10	253404	5,00
		9 W	910 lm	3000 K	80		25.000 h	10	123936	5,00
		9 W	890 lm	3000 K	80	TRIAC	25.000 h	10	252551	9,00
		9 W	1000 lm	4000 K	80		25.000 h	10	154008	5,00
		9 W	900 lm	4000 K	80	TRIAC	25.000 h	10	252568	9,00
		9 W	800 lm	2700 K	90		25.000 h	10	342900	5,00
		9 W	940 lm	3000 K	90		25.000 h	10	288383	5,00









Lampadine R7s

	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 	5W	560 lm	3000 K	80		20.000 h	10	189109	11,00
	6 W	450 lm	3000 K	80	TRIAC	20.000 h	10	266770	12,00
	7 W	580 lm	4000 K	80		20.000 h	10	272375	11,00
	6 W	480 lm	4000 K	80	TRIAC	20.000 h	10	272382	12,00
 	13 W	760 lm	3000 K	80		20.000 h	10	189093	14,00
	8 W	580 lm	3000 K	80	TRIAC	20.000 h	10	266763	15,00
	13 W	830 lm	4000 K	80		20.000 h	10	253480	14,00
	8 W	640 lm	4000 K	80	TRIAC	20.000 h	10	266756	15,00
 	14 W	1700 lm	3000 K	80		15.000 h	10	307862	11,00
	14 W	21000 lm	3000 K	80	TRIAC	15.000 h	10	307855	11,00
	14 W	1700 lm	4000 K	80		15.000 h	10	296869	11,00
	14 W	2450 lm	4000 K	80	TRIAC	15.000 h	10	296876	11,00






Lampadine GU10

		Power	Flux	CCT	CRI	Beam	Dimmable	Life	Min Qty.	Code	€
		4 W	250 lm	3000 K	90	38°	TRIAC	15.000 h	10	356532	4,50
		4 W	280 lm	3000 K	90	60°		25.000 h	10	339771	2,50
		6 W	430 lm	3000 K	90	50°	TRIAC	25.000 h	10	266251	4,50
		5 W	430 lm	4000 K	90	50°		25.000 h	10	253497	2,50
		6 W	450 lm	4000 K	90	50°	TRIAC	25.000 h	10	285566	4,50
		7 W	540 lm	3000 K	90	50°		25.000 h	10	123943	2,50
		7 W	460 lm	3000 K	90	50°	TRIAC	25.000 h	10	288239	4,50
		7 W	620 lm	3000 K	90	108°		25.000 h	10	101378	2,50
		7 W	650 lm	4000 K	90	108°		25.000 h	10	117652	2,50
		8 W	580 lm	3000 K	90	56°		25.000 h	10	189062	3,00
		8 W	620 lm	4000 K	90	56°		25.000 h	10	270975	3,00
		5 W	380 lm	2700 K	95	50°		25.000 h	10	307619	2,50
		5 W	410 lm	3000 K	90	50°		25.000 h	10	108292	2,50
		7 W	540 lm	4000 K	90	50°		25.000 h	10	224367	2,50
		7 W	600 lm	2700 K	95	108°		25.000 h	10	307626	2,50



Lampadine GU10

	Power	Flux	CCT	CRI	Beam	Dimmable	Life	Min Qty.	Code	€
 	12 W	1030 lm	3000 K	90	40°		25.000 h	10	327037	11,00
	12 W	790 lm	3000 K	90	22°	TRIAC	25.000 h	10	326290	12,00
	12 W	970 lm	4000 K	90	20°		25.000 h	10	327051	11,00
 	12 W	1050 lm	2700 K	90	40°		25.000 h	10	342894	11,00
	12 W	1050 lm	3000 K	90	40°		25.000 h	10	327044	11,00
	12 W	1000 lm	3000 K	90	40°	TRIAC	25.000 h	10	327075	12,00
	12 W	1120 lm	4000 K	90	40°		25.000 h	10	327068	11,00
 	10 W	750 lm	3000 K	80	22°		15.000 h	10	189031	11,00
	10 W	720 lm	3000 K	80	22°	TRIAC	15.000 h	10	288543	12,00
	10 W	780 lm	4000 K	80	22°		15.000 h	10	253398	11,00



Kit emergency

Kit luce d'emergenza per moduli LED. Include inverter e batteria. Autonomia da due a tre ore con un tempo di ricarica rispettivamente di 12 e 24 ore.

Funzionamento in sola emergenza o in luce continua (luce continua in abbinamento con alimentatori elettronici e alimentatori elettronici dimmerabili). Protetto in classe II.

Per ulteriori informazioni, si prega di contattare l'ufficio tecnico.



IP20




65mm Group battery



52mm Inverter



185
29
59



166
34
46



0,305 Kg / 0,0010 m³



0,185 Kg / 0,0009 m³


Finitura	Codice	€
Bianco	221595	135



Elenco finiture



TRASPARENTE




BIANCO



CROMO SFUMATO



ACCIAIO



ARGENTO



CROMO



ALLUMINIO



GRIGIO



NICKEL



FUMÈ



ANTRACITE



NERO



AMBRA




BEIGE




TORTORA



ORO




OTTONE



RAME



COFFEE



BRUNITO

NOTE: Le finiture rappresentate hanno scopo illustrativo. Le tonalità sono soggette a variazioni dettate dal tipo di materiale impiegato e dalla sua lavorazione che possono alterarne la resa,

di conseguenza articoli catalogati con medesima finitura potranno presentare delle differenze nella percezione del colore.

Legenda icone

Icone tecniche



Classe I Sicurezza elettrica garantita dall'isolamento principale e da un conduttore di protezione (messa a terra) collegato alla struttura metallica della lampada. Messa a terra obbligatoria.



Classe II Sicurezza elettrica garantita dall'isolamento principale e da un doppio isolamento o da un isolamento rinforzato. Non deve avere messa a terra.



Classe III Sicurezza elettrica garantita dall'alimentazione a bassissima tensione (inferiore a 50 Volt). Non deve avere messa a terra.



Marchio di conformità alle direttive comunitarie europee di sicurezza.

Simboli



Articoli con lampade a LED: consumo estremamente ridotto, luce chiara e concentrata, robustezza e lunga durata.



Interruttore integrato nel corpo luce.



Apparecchio dotato di interruttore touch: si accende e si regola l'intensità col tocco di un dito sul corpo luce.



Lampada con rilevazione di presenza inclusa PIR (Passive InfraRed).



Prodotto ad alto contenuto tecnologico, elevata qualità dei materiali, destinato ad uso professionale.



Apparecchio fornito con variatore di potenza.



Lampada con presa USB integrata.



Lampada con batteria ricaricabile inclusa.



Articolo in acciaio inox 316.



Prodotto componibile

Note

- I prezzi indicati sono riferiti al pubblico IVA esclusa.

- Ideal lux s.r.l. si riserva il diritto di apportare, in qualunque momento e senza preavviso, tutte le modifiche necessarie a migliorare la qualità degli articoli illustrati nel presente catalogo. Per verificare le caratteristiche più aggiornate, consultare la documentazione nel sito web (www.ideal-lux.com).

- I nostri prodotti in classe I e II si alimentano con tensione nominale di 220-240 vac 50/60 hz. Tutti i nostri prodotti sono conformi alle direttive CE.

- Qualora acquistato separatamente come "optional", il driver dimmerabile sarà già incluso nel prodotto in sostituzione del driver standard on-off: verrà fornito un solo driver.

- I Watt indicati a catalogo esprimono la potenza NOMINALE dell'articolo comprensivo di sorgente e driver, quando inclusi. I valori riferiti ai lm relativi alle lampade con sorgenti integrate a LED, sono da considerarsi NOMINALI, riferiti cioè alla sorgente. Per i lm effettivi dei singoli apparecchi illuminanti si prega gentilmente di consultare le fotometrie.

- Il valore UGR non è una caratteristica dell'apparecchio, ma dell'installazione.

Gli UGR riportati in questo catalogo sono stati calcolati tenendo conto di un'installazione ideale e sono raggruppati nei blocchi <10 <13 <16 <19 <22. Si consiglia di calcolare l'UGR specifico secondo la propria installazione.

- La durata di vita utile delle sorgenti LED di tutti gli articoli presenti a catalogo è riferita al valore L70B50, quando non dichiarato altrimenti.



Agos, Andromeda, Argo, Atena, Atom, Basic, Beyond, Bit, Boeing, Bubble, Clio , Cosmo, Cute, Dedra, Deep, Deva, Display, Doris, Down, Dynamite, Edo, Ego, Elio, Eos, Etere, Febe, Felix, Fiesta, Floor, Fluo, Fox, Game, Gas, Giove, Groove, Gun, Hub, Iko, Infinity, Inside, Jazz, Jedi, Keope, Koala, Kurt, Led Panel, Lika, Linea, Link, Litio, Lolita, Look, Luna, Mib, Nova, O-Zone, Off, Office, Omega, Park, Play, Polar, Post-It, Punto, Pure, Quark, Rex, Rocket, Room-65, Samba, Sasso, Sirio, Slot, Snif , Snow, Sole, Starlight, Steel, Stick, Strip Led, Style, Swing, Swipe, Tag, Taurus, Techo, Terra, Tesi, Tesla, Tetris, Thor, Tifone, Titano, Toffee, Torre, Tronco, Twiggy, Twin, Ulex, Up, Urano, Vega, Walky, Way, Wire, Xeno, Zephyr, Zeus.