



## Allgemeine Information

## Technisch - Systeme

Ean	8021696192444
Artikel	FLUO ACCENT 1800 4000K WH
Installation	Systeme
Garantie	5 years
Bruttogewicht	6.83 kg
Volumen	0.025675 m <sup>3</sup>

## Technische Information

Nettogewicht	3.86 kg
Isolationsklasse	I
Schutzindex	IP20
Einhaltung	CE
Betriebstemperatur	0° ~ +40 °C
Dimmer	NO, On-Off
Leistung	220-240 V AC 50/60 Hz
Energieversorgung	In-built, included Replaceable (by qualified operators only), electronic, tridonic
einschließlich Zubehör	Mounting kit (suspension, recessed, surface), Dimmable driver, Blinded corner, Structure connector

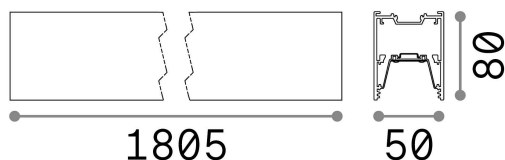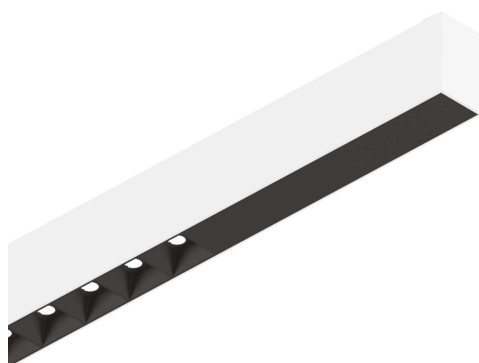

## Quellinfo

Integrierte Quelle	Integrated LED module
Austauschbare Quelle	Replaceable (by qualified operators only)
Leistung	30 W
Emissionen	Direct
Maximaler Verbrauch	max 30,00 W
Merkmale LED	LED SMD OSRAM
CCT LED	4000 K
Dauer LED (t. 25°C)	50000 h
CRI	> 80
SDCM	3
Lichtstrahlwinkel	30°
UGR Maximal	< 13
Lichtstrahlfluss	2900 lm
Nützlicher Lichtstrom	2350 lm