


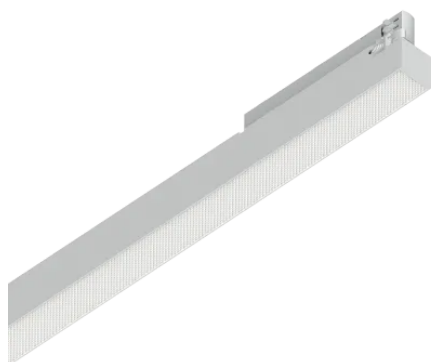


## General info

### Technical - Spotlights and Tracks

|              |                                     |
|--------------|-------------------------------------|
| Ean          | 8021696375427                       |
| Item         | DISPLAY UGR D0535 DALI 3000K BIANCO |
| Installation | Spotlights and Tracks               |
| Warranty     | 5 years                             |
| Gross weight | 0.88 kg                             |
| Volume       | 0.002802 m³                         |

## Technical info

|                          |                                      |
|--------------------------|--------------------------------------|
| Net weight               | 0.65 kg                              |
| Insulation class         | II                                   |
| Protection index         | IP20                                 |
| Compliance               | CE                                   |
| Operating temperature    | 0° ~ +40 °C                          |
| Dimmer                   | 1, DALI                              |
| Power output             | 220-240 V AC 50/60 Hz                |
| Power supply             | In-built, included<br>NO, electronic |
| Accessories not included | Link 3-phase 1-10V/DALI profile      |



## Source info

|                        |                                           |
|------------------------|-------------------------------------------|
| Integrated source      | Integrated LED module                     |
| Replaceable source     | Replaceable (by qualified operators only) |
| Power                  | 14 W                                      |
| Emission               | Direct                                    |
| Max consupcion         | max 14 W                                  |
| Features LED           | LED SMD SAMSUNG                           |
| CCT LED                | 3000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 90                                      |
| SDCM                   | 3                                         |
| Light beam             | 70°                                       |
| UGR Maximum            | < 22                                      |
| Light beam flux        | 2050 lm                                   |
| Useful light flux      | 1200 lm                                   |
| Photobiological risk   | 1                                         |
| Standby power          | < 0.50 W                                  |