


## General info

## Technical - Spotlights and Tracks

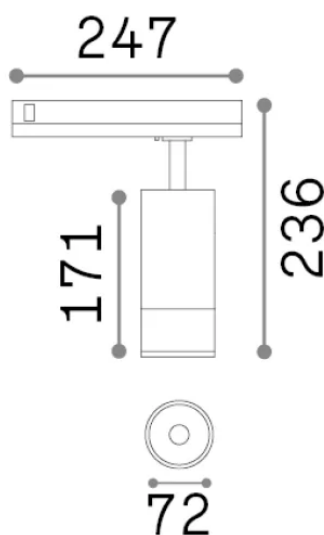

Ean	8021696303017
Item	EOS TR 3-PHASE 25W 3000K DALI WH
Installation	Spotlights and Tracks
Warranty	5 years
Gross weight	1.15 kg
Volume	0.00513 m <sup>3</sup>

## Technical info

Net weight	1.05 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	1, DALI
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included NO, electronic
Accessories not included	Link 3-phase 1-10V/DALI profile

## Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	25 W
Emission	Direct
Max consupcion	max 25 W
Features LED	LED COB BRIDGELUX
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Light beam	20-55°
Light beam flux	2950 lm
Useful light flux	2070 lm
Photobiological risk	1
Standby power	< 0.50 W