


## General info

### Technical - Systems

|              |                         |
|--------------|-------------------------|
| Ean          | 8021696192567           |
| Item         | FLUO WIDE 1800 3000K BK |
| Installation | Systems                 |
| Guarantee    | 5 years                 |
| Gross weight | 6.64 kg                 |
| Volume       | 0.025675 m <sup>3</sup> |

## Technical info

|                          |   |
|--------------------------|---|
| Net weight               | 4.42 kg   |
| Insulation class         | I   |
| Protection index         | IP20  |
| Compliance               | CE  |
| Operating temperature    | 0° ~ +40 °C   |
| Dimmer                   | NO, On-Off  |
| Power output             | 220-240 V AC 50/60 Hz   |
| Power supply             | In-built, included<br>Replaceable (by qualified operators only),<br>electronic, tridonic                  |
| Accessories not included | Mounting kit (suspension, recessed, surface),<br>Dimmable driver, Luminous corner, Structure<br>connector |

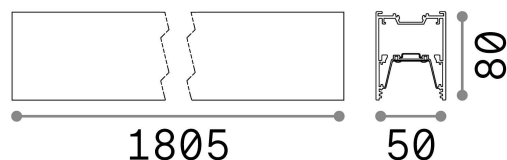

## Source info

|                        |   |
|------------------------|---|
| Integrated source      | Integrated LED module                     |
| Replaceable source     | Replaceable (by qualified operators only) |
| Power                  | 36 W                                      |
| Emission               | Direct                                    |
| Max consumption        | max 36,00 W                               |
| Features LED           | LED SMD SAMSUNG                           |
| CCT LED                | 3000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 80                                      |
| SDCM                   | 3   |
| Light beam             | 105°                                      |
| Light beam flux        | 5050 lm                                   |
| Useful light flux      | 3700 lm                                   |