


General info

Technical - Spotlights and Tracks

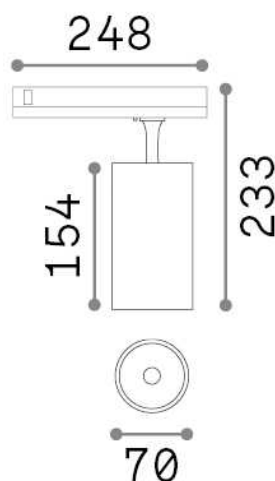

Ean	8021696302621
Item	FOX 25W CRI90 3000K DALI WH
Installation	Spotlights and Tracks
Guarantee	5 years
Gross weight	0.81 kg
Volume	0.004995 m ³

Technical info

Net weight	0.71 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	1, DALI
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included NO, electronic
Adjustability	vert. 0°-90° , orizz. 0°-355°
Accessories not included	Link 1-10V/DALI profile

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	25 W
Emission	Direct
Max consumption	max 25,00 W
Features LED	LED COB BRIDGELUX
CCT LED	3000 K
Duration LED (t. 25°c)	30000 h
CRI	> 90
SDCM	3
Light beam	35°
Light beam flux	2550 lm
Useful light flux	2090 lm
Photobiological risk	1
Standby power	< 0.50 W