

## General info


## Technical - Accessories



Ean	8021696242002
Item	LINUS CORNER 3000K BK
Installation	Accessories
Guarantee	5 years
Gross weight	0.26 kg
Volume	0.00225 m <sup>3</sup>

## Technical info

Net weight	0.26 kg
Insulation class	III
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	1, CC regulation
Accessory type	Optional
Power output	
Power supply	Included in LINUS SP/AP

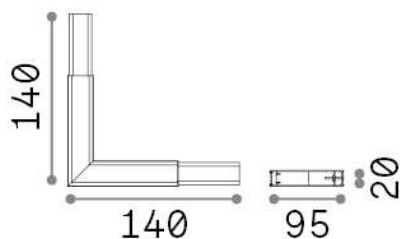

## Source info

Integrated source	Integrated LED module
Replaceable source	No
Power	4 W
Emission	Direct
Max consumption	max 4,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 80
SDCM	3
Light beam	104°
Light beam flux	430 lm
Useful light flux	380 lm
Photobiological risk	1
Standby power	< 0.50 W