Smile

rev. 22-03-2024

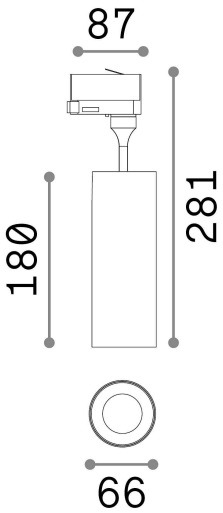

General info

Technical - Spotlights and Tracks

Ean	8021696189581
Item	SMILE 15W CRI80 24° 3000K BK
Installation	Spotlights and Tracks
Guarantee	5 years
Gross weight	0.61 kg
Volume	0.005011 m^3

Technical info

Net weight	0.61 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Load resistance	IK06
Adjustability	vert. 0°-90° , orizz. 0°-350°
Accessories not included	Honeycomb or Elliptical filter, Single connection on-off, Link on-off profile

Source info

Integrated source	Integrated LED module
Repleaceable source	Replaceable (by qualified operators only)
Power	15 W
Emission	Direct
Max consuption	max 15,00 W
Features LED	LED COB PHILIPS
CCT LED	3000 K
Duration LED (t. 25°c)	50000 h
CRI	> 80
Light beam	24°
Light beam flux	2050 lm
Useful light flux	1740 lm

IDEAL LUX s.r.l.
Via Taglio Destro, 32, 30035 Mirano (Venezia)
Tel +39 041 5790500 | **Fax** +39 041 8872349 | **E-mail** info@ideal-lux.com
www.ideal-lux.com