


## General info

## Technical - Spotlights and Tracks

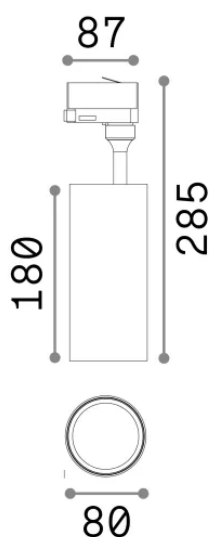

|                     |   |
|---------------------|---|
| <b>Ean</b>          | 8021696189925                           |
| <b>Item</b>         | SMILE TR 3-PHASE 30W CRI90 36° 3000K BK |
| <b>Installation</b> | Spotlights and Tracks                   |
| <b>Warranty</b>     | 5 years                                 |
| <b>Gross weight</b> | 0.87 kg                                 |
| <b>Volume</b>       | 0.005011 m <sup>3</sup>                 |

## Technical info

|                                 |  |
|---------------------------------|--|
| <b>Net weight</b>               | 0.87 kg  |
| <b>Insulation class</b>         | II   |
| <b>Protection index</b>         | IP20   |
| <b>Compliance</b>               | CE   |
| <b>Operating temperature</b>    | 0° ~ +40 °C  |
| <b>Dimmer</b>                   | Non-dimmable, On-Off   |
| <b>Power output</b>             | 220-240 V AC 50/60 Hz  |
| <b>Power supply</b>             | In-built, included<br>Replaceable (by qualified operators only),<br>electronic, tridonic |
| <b>Load resistance</b>          | IK06   |
| <b>Accessories not included</b> | Honeycomb or Elliptical filter, Single connection<br>on-off, Link on-off profile         |

## Source info

|                               |   |
|-------------------------------|---|
| <b>Integrated source</b>      | Integrated LED module                     |
| <b>Replaceable source</b>     | Replaceable (by qualified operators only) |
| <b>Power</b>                  | 30 W                                      |
| <b>Emission</b>               | Direct                                    |
| <b>Max consumption</b>        | max 30 W                                  |
| <b>Features LED</b>           | LED COB PHILIPS                           |
| <b>CCT LED</b>                | 3000 K                                    |
| <b>Duration LED (t. 25°C)</b> | 50000 h                                   |
| <b>CRI</b>                    | > 90                                      |
| <b>SDCM</b>                   | 3   |
| <b>Light beam</b>             | 36°                                       |
| <b>Light beam flux</b>        | 3500 lm                                   |
| <b>Useful light flux</b>      | 3040 lm                                   |