

General info


Technical - Ceiling



Ean	8021696268118
Item	STEEL SP D20 PROFILO ANGOLARE WIDE 4000K NERO
Installation	Ceiling
Warranty	5 years
Gross weight	0.26 kg
Volume	0.002816 m ³

Technical info

Net weight	0.26 kg
Insulation class	III
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	1, CC regulation
Accessory type	Optional
Power output	36 V DC
Power supply	Included in LINUS SP/AP

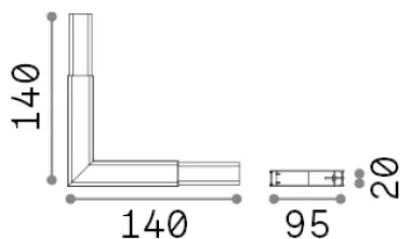

Source info

Integrated source	Integrated LED module
Replaceable source	No
Power	5,5 W
Emission	Direct
Max consupcion	max 5,5 W
Features LED	LED SMD
CCT LED	4000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Light beam	104°
Light beam flux	600 lm
Useful light flux	270 lm
Photobiological risk	1
Standby power	< 0.50 W