


## Info generali

## Lampadine e accessori - Strip led

Indoor dimmable LED strip with integrated LED sources and direct light emission

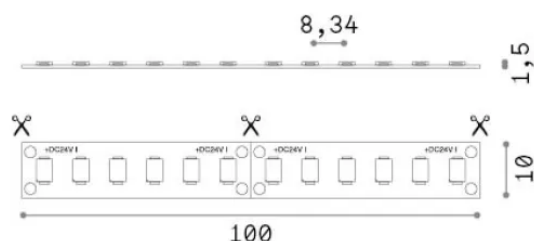

|               |                                                                             |
|---------------|-----------------------------------------------------------------------------|
| Ean           | 8021696272474                                                               |
| Articolo      | STRIP LED 120 SMD 15W/M 4000K CRI90 IP20                                    |
| Installazione | Slot / Tesi 20 mm / Vision profile - max length for connection in line: 5 m |
| Garanzia      | 5 years                                                                     |
| Peso lordo    | 0.19 kg                                                                     |
| Volume        | 0.000326 m³                                                                 |

## Info tecniche e installative

|                         |                                 |
|-------------------------|---------------------------------|
| Peso netto              | 0.11 kg                         |
| Classe di isolamento    | 3                               |
| Conformità              | CE                              |
| Alimentazione           | 24 V DC                         |
| Dimmer                  | 1, Phase-cut                    |
| Alimentatore            | Required, remoted, not included |
| Grado di protezione     | 20                              |
| Temperatura d'esercizio | 0° ~ +40 °C                     |
| Lunghezza fornita       | L 5000 x H 1 x P 10 mm          |
| Accessori non inclusi   | Remote driver                   |

## Info sorgente e prestazionali

|                      |                |
|----------------------|----------------|
| Potenza              | 75 W           |
| Emissione            | Direct         |
| Consumo massimo      | max (1 m) 15 W |
| CCT LED              | 4000 K         |
| Durata LED (t. 25°C) | 50000 h        |
| CRI                  | > 90           |
| SDCM                 | 3              |
| Fascio luminoso      | 120 °          |
| Flusso utile         | (1 m) 1600 lm  |