


## General info

## Technical - Spotlights and Tracks

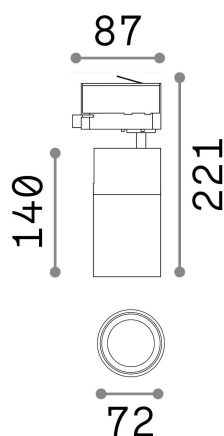

|                     |                                 |
|---------------------|---------------------------------|
| <b>Ean</b>          | 8021696247960                   |
| <b>Item</b>         | QUICK 21W CRI80 4000K ON-OFF WH |
| <b>Installation</b> | Spotlights and Tracks           |
| <b>Guarantee</b>    | 5 years                         |
| <b>Gross weight</b> | 0.96 kg                         |
| <b>Volume</b>       | 0.003828 m <sup>3</sup>         |

## Technical info

|                                 |  |
|---------------------------------|--|
| <b>Net weight</b>               | 0.76 kg  |
| <b>Insulation class</b>         | I  |
| <b>Protection index</b>         | IP20   |
| <b>Compliance</b>               | CE   |
| <b>Operating temperature</b>    | 0° ~ +40 °C  |
| <b>Dimmer</b>                   | NO, On-Off   |
| <b>Power output</b>             | 220-240 V AC 50/60 Hz  |
| <b>Power supply</b>             | In-built, included<br>Replaceable (by qualified operators only),<br>electronic, tridonic     |
| <b>Adjustability</b>            | vert. 0°-90° , orizz. 0°-355°  |
| <b>Accessories not included</b> | Honeycomb filter, Narrow or wide beam lens,<br>Single connection on-off, Link on-off profile |

## Source info

|                               |   |
|-------------------------------|---|
| <b>Integrated source</b>      | Integrated LED module                     |
| <b>Replaceable source</b>     | Replaceable (by qualified operators only) |
| <b>Power</b>                  | 21 W                                      |
| <b>Emission</b>               | Direct                                    |
| <b>Max consumption</b>        | max 21,00 W                               |
| <b>Features LED</b>           | LED COB CITIZEN                           |
| <b>CCT LED</b>                | 4000 K                                    |
| <b>Duration LED (t. 25°c)</b> | 50000 h                                   |
| <b>CRI</b>                    | > 80                                      |
| <b>SDCM</b>                   | 3   |
| <b>Light beam</b>             | 30°                                       |
| <b>Light beam flux</b>        | 2700 lm                                   |
| <b>Useful light flux</b>      | 2350 lm                                   |